



FROM THE MAKER OF #1 QUALITY² ADVANTECH® SUBFLOORING COMES NEW ADVANTECH™ SUBFLOOR ADHESIVE, FOR SUBFLOOR ASSEMBLIES SO STRONG YOU WON'T HEAR A SQUEAK.¹

When it comes to choosing subflooring that installs fast and stays flat, builders turn to AdvanTech® panels. Now when you combine the award winning AdvanTech® subfloor panel with the NEW AdvanTech™ subfloor adhesive, you get a bond so strong that it is backed by a 10-year Squeak-Free Guarantee.¹ Install faster with the speed and ease of the gun-applied foam that quickly collapses into an aggressive polyurethane gel adhesive. Achieve permanent bonds at panel-to-joist connections that are 2-5 times greater than industry standards. Plus, it's unique moisture-curing formula makes it great for use on wet or frozen wood.³ Use on any wood-to-wood assemblies, glued-floor systems, plywood or OSB. See SqueakFreeGuarantee.com for details on AdvanTech's Squeak-Free Guarantee.

Quiet subfloors can help keep the peace from jobsite to homesite. Put AdvanTech subflooring and AdvanTech subfloor adhesive to work on your next job with a Squeak-Free Guarantee.¹

To get started, ask about the AdvanTech™ subfloor adhesive Starter Kit.

- 6 AdvanTech subfloor adhesive cans
- 1 Polyurethane foam cleaner can
- 1 Non-Stick PTFE Pro Grade Foam applicator gun

Check AdvanTechSFA.com for local availability, videos in action or other technical information.

LAUNCHING Q1 2017 NATIONWIDE*

*Excluding Alaska and Hawaii.



One 24 oz. can yields 400 linear feet⁴



Squeak-Free Guarantee¹



Polyurethane bonding strength



Adheres to wet and frozen wood³



Quick and easy application



Apply between 20° to 105° F (-6° to 41° C)



20 minute open time

From the makers of AdvanTech® subfloors – FLAT OUT BEST™ for strong, moisture-resistant floors. #1 in quality for over a decade.²

1. Squeak Free Guarantee for AdvanTech subfloor assembly at joist connection: Limitations and restrictions apply. Must use AdvanTech subfloor panels with I-joists or trusses and deformed fasteners with this adhesive. Not applicable over dimensional lumber framing or with other subfloor panels. Applies only to one and two family dwellings, townhomes and structures permitted under IRC or governing residential code. See SqueakFreeGuarantee.com for complete details.

EXTREME HOLDING POWER, FOR THE FLAT OUT BEST™ ADVANTECH® SUBFLOORS




8X MORE COVERAGE⁴

MORE COVERAGE IN EACH CAN

8x greater yield than traditional adhesive caulks⁴ means advanced strength with less product — a cost-effective, speedy application for your subfloor installations.



20° F



105° F



IDEAL FOR COLD AND WET CONDITIONS


Formulated to adhere to wet and frozen structural subfloor panels and joists,³ this moisture curing poly adhesive is the ideal solution for not so ideal weather conditions.

EXPANDS INTO IRREGULARITIES



FILLS GAPS FOR A TIGHTER BOND

The foam to gel polyurethane formula expands into minor gaps between the subflooring panel and joist, maximizing adhesion for a tighter overall subflooring assembly.

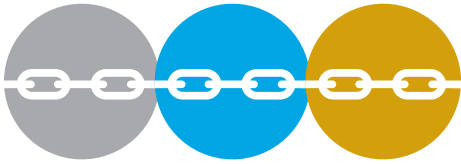

POLYURETHANE BONDING STRENGTH

Polyurethane formula helps create a solid, firmly-bonded surface — exceeding ASTM D3498 and APA-AFG-01 subfloor adhesive standards. Floors stay put, and quiet, helping reduce the chance of callbacks. When tested to ASTM requirements, AdvanTech™ subfloor adhesive consistently performs 2 to 5 times above standards.

Versatile Application Strength	
ASTM D3498	Pass Criteria
Shear Strength — Dry Lumber	> 500 psi (requirement >150)
Shear Strength — Wet Lumber	> 300 psi — Douglas Fir (req > 150) > 400 psi — Southern Pine (req > 150)
Shear Strength — Frozen Lumber	> 300 psi — Douglas Fir (req > 100) > 500 psi — Southern Pine (req > 100)
Moisture Resistance	> 500 psi (req > 150)
Gap	> 400 psi (req > 100)
Oxidation Resistance	Pass

Technical Data	
Shelf Life	18 months
Open Time	20 minutes
Fully Cured	24 hours
Yield at 1/2" bead size ⁴	400 linear feet
Appl. Temperature Range	20° – 105°F
VOC Content	15 wt. %
VOC Content (California)	155 g/L
VOC Compliant ⁵	Yes

1. Squeak Free Guarantee for AdvanTech subfloor assembly at joist connection: Limitations and restrictions apply. Must use AdvanTech subfloor panels with I-joists or trusses and deformed fasteners with this adhesive. Not applicable over dimensional lumber framing or with other subfloor panels. Applies only to one and two family dwellings, townhomes and structures permitted under IRC or governing residential code. See SqueakFreeGuarantee.com for complete details.
2. Builder Magazine 2002-2016 Brand Use Studies; #1 in OSB category.
3. Exceeds ASTM D3498 Standard Specification for Field-Gluing Plywood to Lumber Framing for Floor Systems, dry, wet, frozen, and gap filling adhesion tests.
4. Coverage: One 24 oz. can of AdvanTech subfloor adhesive yields approximately 400 linear feet of gel adhesive at 1/2" bead compared to applying a 28 oz. cartridge adhesive at 3/8" bead. Coverage will vary based on bead size and weather conditions.
5. California Air Research Board, CARB, has classified AdvanTech Subfloor Adhesive as a Web Spray Adhesive. AdvanTech Subfloor Adhesive satisfies governing VOC limitations for web spray adhesives.



Watch the easy application in action and see the heavy-duty holding power difference.
Visit AdvanTechSFA.com