

Vinyl L-Stop Bead (VLLS)

Vinyl Trims

L-Stop Bead creates a clean detail at gypsum panel terminations into doors, windows and ceilings. Easy attachment is attained with nails, screws or staples to studs through bead flange. Multiple perforations along 1-1/4" flange and raised shoulder enhance strong compound adhesion and provide for a flush finish. Rigid vinyl is rust proof, dent resistant and easy to field cut without distorting profile or leaving sharp edges and burrs.

Product Data & Ordering Information:

Material: 0.028" PVC (Polyvinyl Chloride)
Dimensions: 1/2" & 5/8" depths

Width	Length	Wt./Ctn.	Pcs./Ctn.
1/2"	8'	13 lbs	50
1/2"	10'	17 lbs	50
5/8"	8'	15 lbs	50
5/8"	10'	19 lbs	50

ASTM & Code Standards:

- ASTM C1047 - Standard Specification for Accessories for Gypsum Wallboard and Gypsum Veneer Base
- ASTM D3678 Class 2 materials
- Installation: ASTM C840 & C841 (Interior Finishes)
- SDS & Product Certification Information is available at www.clarkdietrich.com/SupportDocs


Storage:

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather.

09.22.00 (Support for Plaster & Gypsum Board)



- Rust proof and dent resistant
- Produces finished edges at panel terminations
- Raised shoulder and perforations enhance compound adhesion

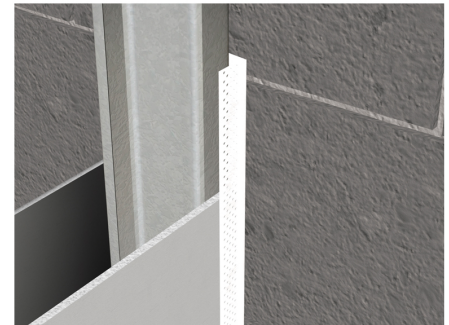

VLLS © 10/2017 ClarkDietrich Building Systems

Project Information

Name:
Address:

Contractor Information

Name:
Contact:
Phone:
Fax:

Architect Information

Name:
Contact:
Phone:
Fax: