



Technical Bulletin

2400 Boston Street, Suite 200, Baltimore, Maryland 21224
Phone: 410-675-2100 or 800-543-3840

Revised: 1/16/2017

DAP® '33'® Window Glazing

- For face glazing wood, metal and aluminum sash
- Forms airtight & watertight seal
- Resists sagging, cracking and shrinking
- Interior/Exterior use

Packaging: 8 fl. oz. tub (237 mL), 16 fl. oz. tub (472 mL), 32 fl. oz. tub (946 mL),
1 Gallon tub (3.78 L), 3.5 Gallon Tub (13.24 L)

Colors: White

UPC Numbers: 7079812120, 7079812121, 7079812122, 7079812019, 7079812124, 7079871090,
7079871112, 7079871151

Company Identification:

Manufacturer: DAP Products Inc., 2400 Boston St., Ste. 200, Baltimore, Maryland 21224
Usage Information: Questions? Call 1-888-DAP-TIPS or visit dap.com & click on "Ask the Expert".
Order Information: 800-327-3339
Fax Number: 410-558-1068

Product Description:

DAP® '33'® Window Glazing is a ready-to-use glazing compound that may be used for face glazing wood or metal sash. Its knife grade consistency allows for smooth, easy application. DAP® '33'® Window Glazing sticks tightly to glass and sash and resists sagging, shrinking and cracking.

Suggested Uses:

For face glazing:

- wood window frames
- metal window frames

NOTE: Do not use DAP® '33'® Window Glazing on plastic windowpanes, porcelainized steel insulating panels, insulated glass units with an organic seal, stained or leaded glass, any windowpane over 48 inches in any run direction, any metal sash with rabbets over 1/4" wide, composite or composition panels, channel glazing or on any surfaces not prepared as set forth below.

Surface Preparation, Application & Painting:

Surface Preparation

1. When re-glazing, remove from sash (i) all old glazing compound, (ii) any glazier points and/or spring clips, (iii) glass, and (iv) any back bedding. Glass should be free from any residual glazing compound and back bedding prior to reinstallation.
2. All surfaces must be clean, dry, and free of frost or any substance that would compromise adhesion of the glazing material (e.g., wax, oil, grease, rust inhibitors, silicone residue, etc.).
3. For metal windows, sash corners must be sealed. All sashes must be safely installed and adjusted prior to glazing and sufficiently rigid to permit normal operation without excessive bending or flexing. Adjustment of freshly glazed sash will disrupt the adhesive bond of the glazing material

to the glass and sash.

4. For wood sash applications, prime sash with an oil-based primer only and allow primer to dry.

Product Application

NOTE: Do not apply DAP® '33'® Window Glazing when air or sash temperatures are below 40°F or above 90°F. Do not apply during damp or rainy weather or if rain is forecasted within 24 hours of application.


1. Mix entire contents of container by hand (by kneading or rolling glazing in gloved hands) until uniform. Do not add any type of oil, pigment, thinners, solvents or additives to the glazing compound.
2. Bring compound to room temperature (68-72°F) prior to use. If necessary, place glazing in a gloved hand to warm and soften.
3. DAP® '33'® Window Glazing must be applied to backstop of wood or metal sash to provide back bedding where glass is to be set. Minimum thickness of back bedding is 1/8" throughout. Only DAP® '33'® Window Glazing may be used for back bedding. There should be no metal frame-to-glass or wood frame-to-glass contact.
4. For back bedding of metal sash, use spacer shims at quarter points to maintain 1/8" minimum bedding thickness throughout.
5. Press glass firmly into place. If glass size is over 24" in horizontal dimension, use setting blocks at quarter points on bottom rail. For clear glass, maintain 1/4" minimum contact area between glass and compound throughout. For heat absorbing glass, 3/8" minimum contact area is required throughout.
6. Install glazier's points (wood window frames) or spring clips (metal window frames) at quarter points of windowpane to hold glass. Space the points/clips no more than 18" apart for exterior glazed sash. For interior glazed sash, space them no more than 12" apart. Points/clips are necessary to hold the glass in place. The glazing compound should not be expected to perform this function.
7. Press only DAP® '33'® Window Glazing onto sash and against glass, being careful to fill height and width of L-shaped recess completely.
8. Smooth glazing to an angle that sheds water. There should be no gaps, spaces or indentations. Then shape corners to a rounded finish only.
9. Remove excess glazing with mineral spirits before it sets.
10. If excess glazing needs to be removed after setting, such material must be cut, scraped away or otherwise mechanically removed.

Product Painting

1. DAP® '33'® Window Glazing must be painted after it has skinned over and attained a firm set. Firm set is typically demonstrated when a light finger touch to the surface does not leave a fingerprint. Firm set may occur in as little as 7 days after application, but more likely 2-3 weeks after application. Painting must be done only after firm set is achieved.
2. When painting, use only (i) a high quality exterior-grade oil-based paint, or (ii) prime with a high quality oil-based primer and topcoat with a high quality exterior-grade acrylic-latex paint finish. The paint line must overlap onto the face portion of the glass, as well as the bedding area where the sash and glass meet.

NOTE: The glazing compound may still feel soft and may not have full adhesion even after it has skinned over and attained a firm set. Accordingly, sash should be operated carefully for approximately three weeks on the average. Glazing may still be damaged if sash is handled carelessly. Full adhesion will develop within two to four months, depending on job conditions.

Illustration of Key Terminology Used in Face Glazing

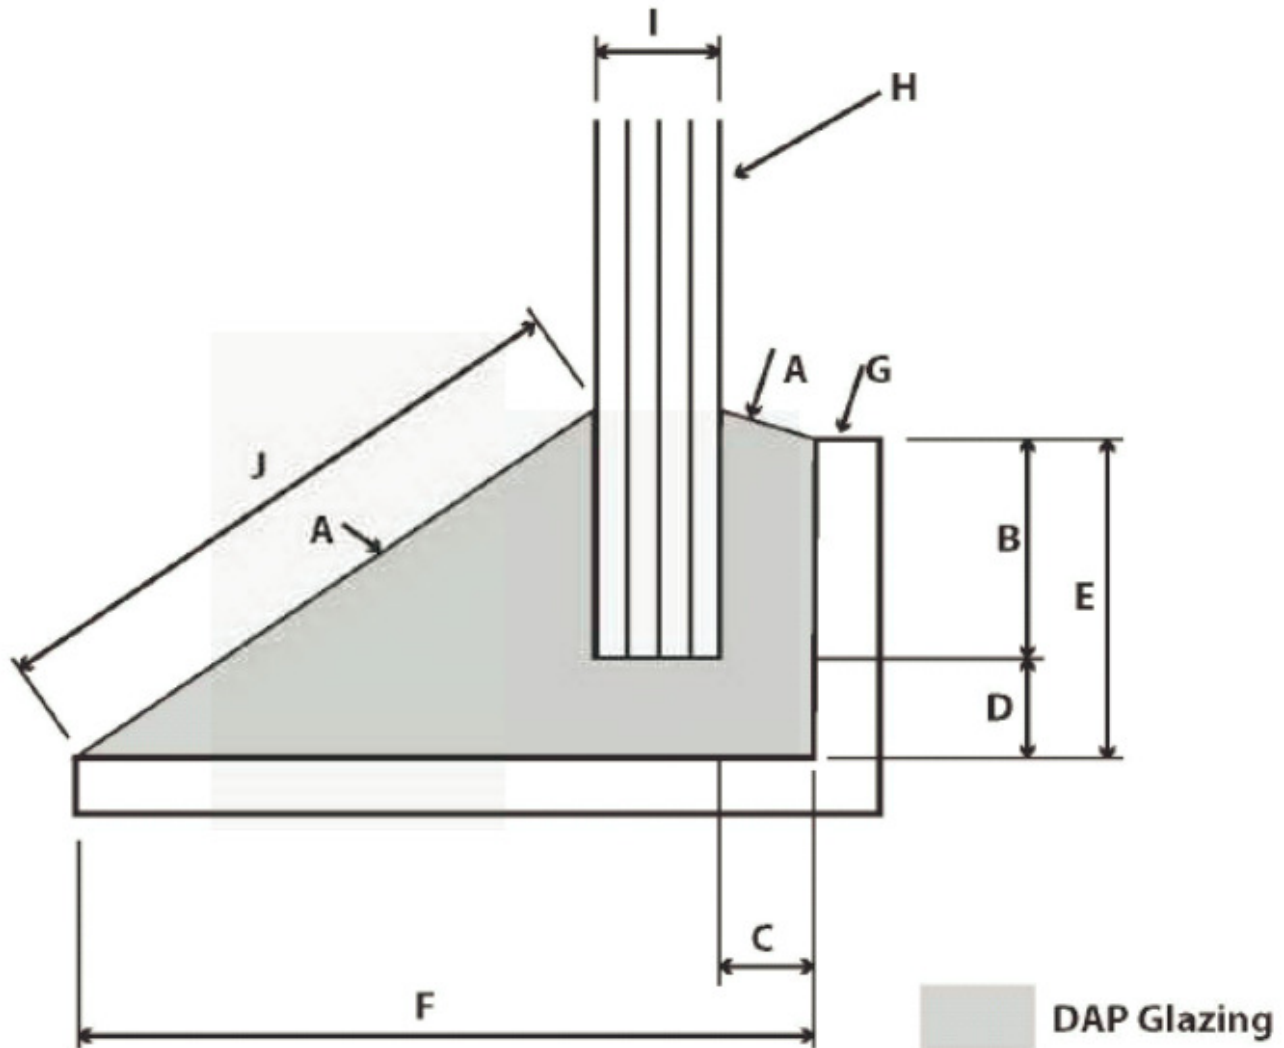

Typical Physical & Chemical Characteristics:

Time to Firm Set:	Approximately three weeks depending on temperature, humidity, air movement, sunlight and fill volume
Paint Requirements:	Apply a high quality exterior-grade oil-based paint after product has skinned over and attained a firm set. A high quality exterior-grade latex paint can only be used if glazing surfaces are first primed with a high quality oil-based primer.
Odor:	Mild
Consistency:	Knife Grade
Vehicle:	Blend of Soya, Polymerized Linseed and Mineral Oils
Volatile:	Aliphatic Hydrocarbons
Filler:	Inorganic Fillers and Color Pigments
Solids:	99% by weight
Weight per Gallon:	18.4 lbs/gallon
Temperature Service Range:	-20°F to 160°F
Temperature Application Range:	40°F (and rising) to 90°F (and falling)
Shelf Life:	12 months in an unopened container stored at 68°-72°F or below.

Coverage:
SDS No.:

Varies by size of container; Call 1-888-DAP-TIPS for further information
00010401001, 00017021605

Clean Up & Storage:

Clean tools immediately after use with mineral spirits. Do not use mineral spirit to clean skin. Be sure container lid is closed and tightly sealed. Store in a cool, dry place.

Safety:

See product label and Safety Data Sheet (SDS) for safety information. For an SDS, contact your supplier or visit dap.com.

Warranty Information:

If product fails to perform as directed, within one year from the date of purchase, call 1-888-DAP-TIPS, with your sales receipt and product container available, for replacement product or sales price refund. DAP will not be responsible for incidental or consequential damages.