


Submitted Model No.: \_\_\_\_\_

Specific Features: \_\_\_\_\_

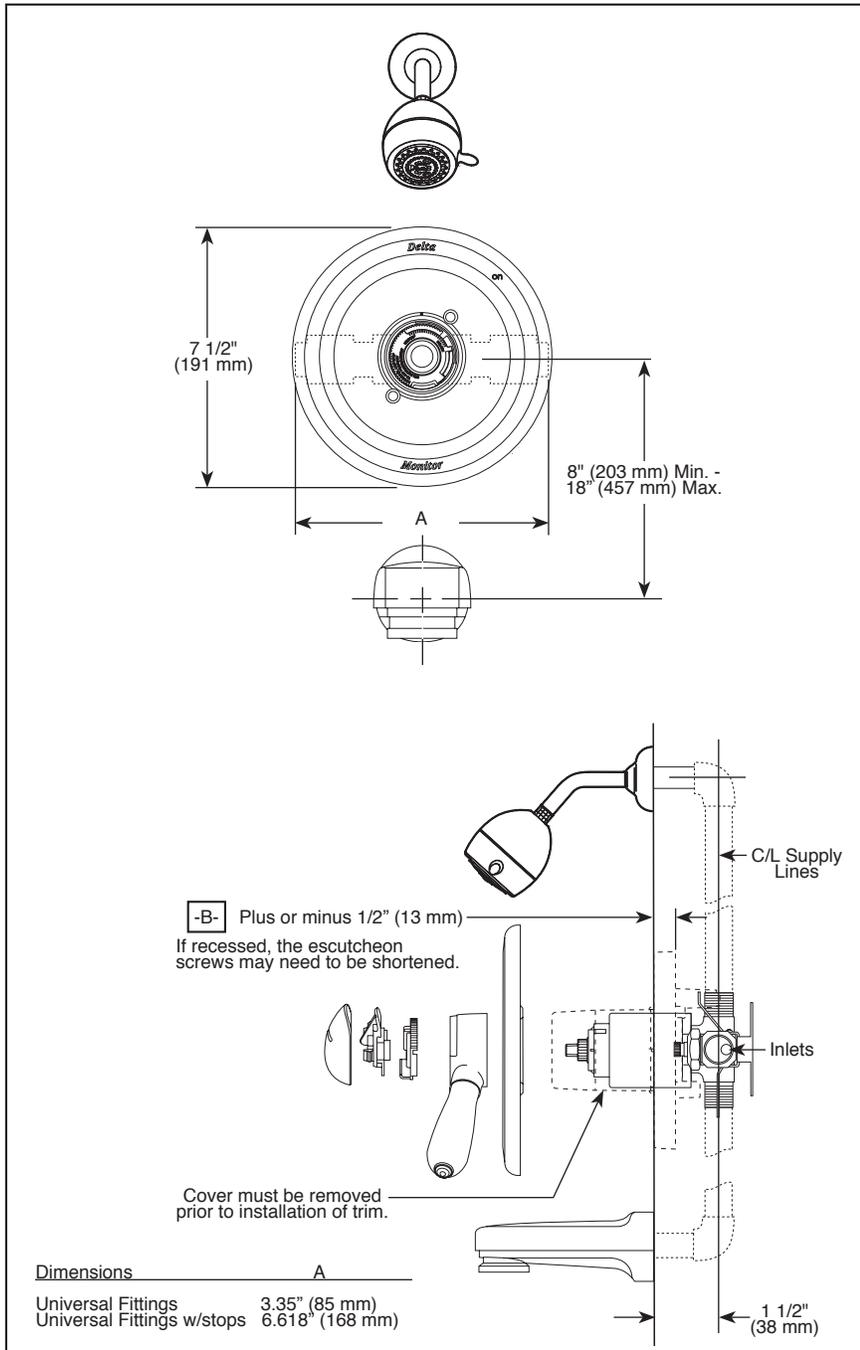

# BATH MIXING VALVE

- Monitor® with Scald-Guard® Valve
- Pressure Balance
- Volume Controlled with Lever Handle
- Temperature Controlled with Dial

## STANDARD SPECIFICATIONS:

- Requires 1 1/2" (38 mm) wall cavity
- Back-to-back installation capability.
- 69" (1753 mm) flexible hose
- Solid brass forged body.
- Monitor® with Scald-Guard® valve. Maintains a balanced pressure of hot and cold water even when a valve is turned on or off elsewhere in the system.
- Lever volume control handle, temperature adjustment dial.
- Field adjustable to limit dial rotation into hot water zone.
- Maximum dial rotation adjustable between 90° and 180°.
- Red and blue graphics indicate hot/cold temperature adjustment.
- Inlets and outlets supplied with universal fittings to accept 1/2" copper, 1/2" iron pipe, PEX or CPVC adapters.

## WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

## COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- Indicates compliance to ICC/ANSI A117.1 - Valve control only



55 E 111th Street, Indianapolis, Indiana 46280  
 350 South Edgeware Road, St. Thomas, ON N5P 4L1  
 © 2017 Masco Corporation of Indiana

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full line price book or [www.deltafaucet.com](http://www.deltafaucet.com) for finish options and product availability.