


Industrial grade straight blade duplex receptacles

Project Name:	Prepared By:
Project Number:	Date:
Catalog Number:	Type:

Description

2-Pole, 3-Wire Grounding
 15A 125V; 15A 250V
 NEMA 5-15, 5-20



AH5252



AH5352

Design features

- Exclusive 5-leaf solid brass line contacts ensure smooth plug blade insertion and long-term retention
- Exclusive 0.030" (0.76mm) solid brass, non-riveted, integral one-piece grounding shunt system assures ground integrity under heaviest use
- High impact and chemical-resistant nylon face
- Tapered lead-in slots on back wiring holes assist in gathering stranded wires for faster, more secure connections
- All terminal and mounting screws triple combination (slot/Phillips/Robertson) head for maximum installer flexibility
- Long, broad mounting strap helps reach large panel cutouts for code compliance
- Automatic grounding system eliminates need for bonding jumper in grounded metal enclosure, provides redundant measure of ground continuity where jumper used
- Screw-Catch feature on duplex devices speeds mounting of wallplates

Table 1. Industrial Grade Duplex Receptacles, Back & Side Wire

Catalog No.	Description	Amps	Volts	Color Suffix
□ AH5252__	NEMA 5-15R Duplex Receptacle, Back & Side Wire	15	125	B, BK, BL, GY, LA, RD, V, W
□ AH5352__	NEMA 5-20R Duplex Receptacle, Back & Side Wire	20	125	B, BK, GY, LA, RD, V, W

Compliances, specifications and availability are subject to change without notice.



Powering Business Worldwide

Project Name:	Prepared By:
Project Number:	Date:
Catalog Number:	Type:

Applications

Industrial grade duplex receptacles are challenged on a daily basis to provide a consistent, reliable means of connectivity in a wide variety of environments ranging from commercial office space to production areas within a steel mill. The applications vary greatly by environment and provide challenges from impact and chemical resistance to environmental extremes such as heat and moisture. The breadth of Arrow Hart's line of straight blade receptacles provide solutions to all environments and applications. High impact- and chemical-resistant nylon faces withstand abuse to maintain structural integrity. The durable contact designs provide long life blade retention.

Table 2. Specifications

Catalog No.	AH5252, AH5352 Series
Device Type	Industrial Grade Duplex Receptacles
Wiring Type	Back & side wire
Testing & Code Compliance	<ul style="list-style-type: none"> • cULus Listed to UL 498, file no. E15058 • UL verified to Federal Spec. WC-596G • CSA certified to C22.2, no. 42 • NOM certified
Environmental Specifications	Flammability: Meets UL 94 requirements; V2 rated Temperature Rating: -20°C to 70°C (-4°F to 158°F)
Electrical Specifications	Dielectric Voltage: Withstands 2000V per UL 498 Current Interrupting: Yes, at full-rated current Temperature Rise: Max. 30°C (86°F) after 250 cycles of overload @ 200% of rated current (DC)
Mechanical Specifications	Terminal Accommodation: #14 - 10 AWG Voltage Ratings: Permanently marked on device

Table 3. Materials

Catalog No.	AH5252, AH5352 Series
Face	Nylon
Base	Nylon
Strap	0.046" thick steel, brass plated
Auto Ground	Phosphor bronze staple
Line Contacts	0.031" thick 5-leaf 688 grade high-performance brass
Ground Contact	0.030" thick brass grounding shunt
Terminal Screws	#8-32 brass plated, neutral screw nickel plated
Ground Screw	Steel, zinc plated (green)
Screw Terminal Guards	N/A

Table 4. Color Ordering Information

For ordering devices, include Cat. No. followed by the color code: B (Brown), BK (Black), BL (Blue), GY (Gray) LA (Light Almond), RD (Red), V (Ivory), W (White)

B	BK	BL	GY	LA	RD	V	W
Brown	Black	Blue	Gray	Lt. Almond	Red	Ivory	White

Project Name:	Prepared By:
Project Number:	Date:
Catalog Number:	Type:

Product Dimensions

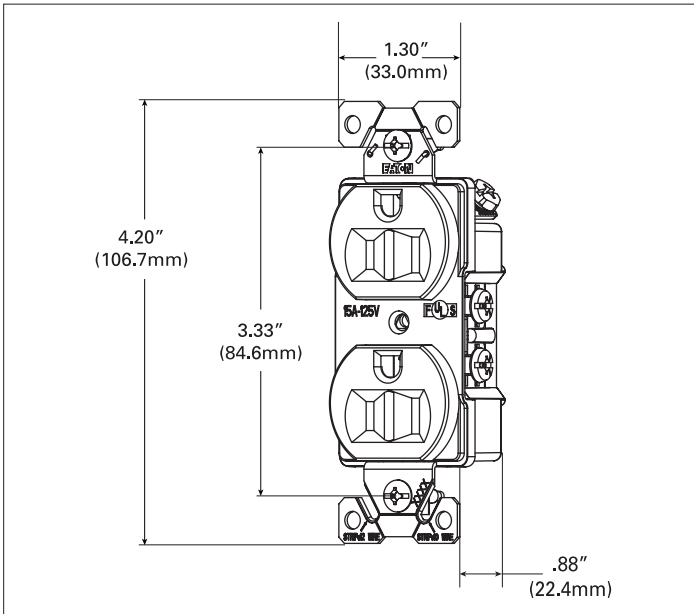


Figure 1. AH5252 Line Art with Dimensions

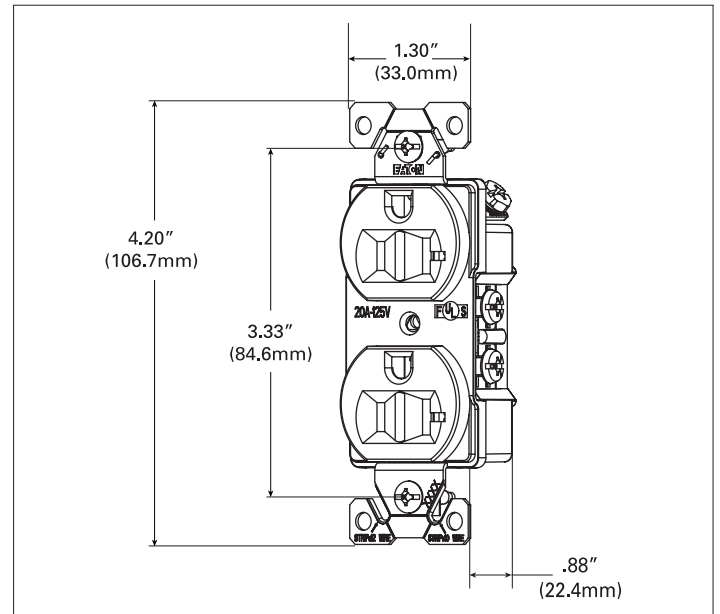


Figure 2. AH5352 Line Art with Dimensions

Certifications & Compliances

Catalog No.	cULus	FCS	CSA	NOM 426	Arrowlink	Build-To-Spec	ROHS
AH5252	•	•	•	•	•	•	•
AH5352	•	•	•	•	•	•	•

KEY: cULus cULus FCS Fed Spec CSA CSA NOM 426 NOM Arrowlink Build-To-Spec ROHS

Parts are manufactured and designed in accordance with article 4 of the European Union's RoHS2 directive 2011/65/EU

Build-To-Spec Customizable Devices

Compliances, specifications and availability are subject to change without notice.

Electrical Sector
203 Cooper Circle
Peachtree City, GA 30269
United States
Eaton.com
Cooperwiringdevices.com

Electrical Sector
Canada Operations
5925 McLaughlin Road
Mississauga, Ontario, L5R 1B8
Canada
EatonCanada.ca
Cooperwiringdevices.com

Electrical Sector
Mexico Operations
Carr. Tlalnepantla -
Cuautitlan Km 17.8 s/n
Col. Villa Jardin esq.
Cerrada 8 de Mayo
Cuautitlan, Mexico CP 54800
Mexico
Eaton.mx
Cooperwiringdevices.com

Eaton
1000 Eaton Boulevard
Cleveland, OH 44122
United States
Eaton.com

© 2014 Eaton
All Rights Reserved
Printed in USA
Publication No. E125-0138-14
October 2014

Eaton is a registered trademark.

All other trademarks are property
of their respective owners.