

Cast Iron Sewage Pump

With Tethered Switch



**RUGGED
CONSTRUCTION**

**HIGH-EFFICIENCY
PSC MOTOR**

**HANDLES UP TO
2" SOLIDS**

5-YEAR WARRANTY




170 GPM 10,200 GPH

MODEL
E75STVT

3/4 HP

Discharge height above pumping level	0'		5'		10'		15'		20'		Max. Lift	Float Switch		Solids Handling	Carton Dimensions	Pallet Quantity	Weight	
	Gallons/min.	E75STVT	Gallons/hr.	Gallons/min.	E75STVT	Gallons/hr.	Gallons/min.	E75STVT	Gallons/hr.	On		Off						
	170	E75STVT	10,200	153	9180	125	7500	105	6300	40	2400	24'	On 16.5"	Off 7.5"	2"	11.5" x 9.88" x 16.13"	32	30 lbs.

PERFORMANCE CURVE

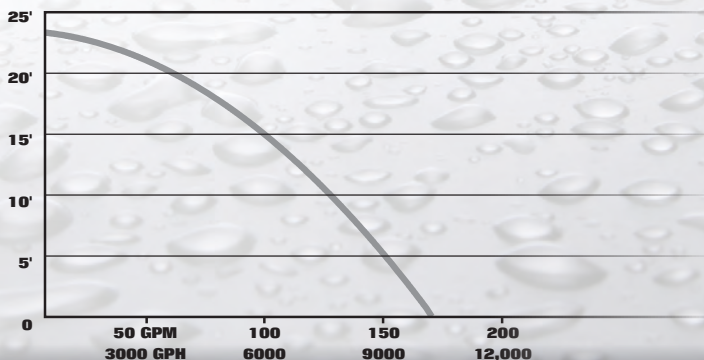

115VAC 1 Phase

10' Power Cord

2" FNPT Discharge

Includes:

2" discharge (meets standard code approvals),
20' power cord for easy installation,
detailed owner's manual

Check valve replacement recommended