

ASSEMBLED AIR CIRCULATOR HEADS & MOUNTS

EIGHT FACTORY ASSEMBLED & TESTED FAN HEADS THAT CAN BE USED WITH ANY OF THE SIX TPI INDUSTRIAL MOUNTS.

CIRCULATOR HEADS:



Meets OSHA Standards


MOTOR 2-speed, 120V, 1 Ph., ball bearing, totally enclosed, permanently lubricated

permanent split capacitor.

SWITCH Pull Chain

CORD SJT type 3 conductor, 12' long
GUARDS Double locking, chrome plated steel
BLADE Steel hub/spider & aluminum paddles

Order Fan Heads & Mounts for complete assembly!

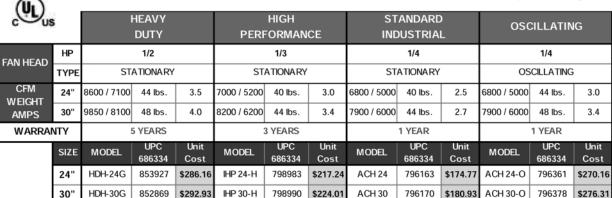

CIRCULATOR MOUNTS:





WALL MOUNT





OPTIONAL PEDESTAL WHEEL KIT WITH 10" RUBBER WHEELS



POLE MOUNT



CEILING MOUNT



SUSPENSION MOUNT

CIRCULATOR MOUNT	MODEL	UPC 686334	Shipping Weight	UNIT COST
Pedestal	ACM-P	796187	34 lbs.	\$88.62
Wall Mount	ACM-W	796194	3 lbs.	\$33.23
I-Beam Mount	ACM-I	796200	9 lbs.	\$59.08
Ceiling Mount	ACM-C	796217	3 lbs.	\$33.23
Suspension Mount	ACM-S	796224	2 lbs.	\$29.54
Pole Mount	ACM-PM	868181	5 lbs	\$43.08
Optional Wheel Kit	ACM-WK	868136	2 lbs.	\$36.31

- Adjustable pedestal column (4 1/2' to 7') bolts to 27" steel dome base with five carriage bolts.
- I-beam mount & ceiling mount require 1 1/2" or longer pipe nipple for assembly. (not supplied)
- Oscillating motors can only be used with any mount when motor can be mounted in the upright position.

INDUSTRIAL FLOOR FANS

Totally Enclosed Motor







FLOOR MODEL



MOTOR 3-speed, 1 Ph., 120V sleeve bearing

permanently lubricated

SWITCH Rotary

CORD SJT type 3 conductor, 10' long

HEAD TILT 360°

GUARDS Chrome plated

Note: Overall height of high stand is 53"

Meets OSHA Standards • 1 Year Limited Warranty

HIGH STAND MODEL

SIZE	TYPE	MODEL	UPC	MOTOR		CFM			SHIPPING	UNIT COST
SIZE	3.22 1112 1		686334	HP	HIGH	MED	LOW	HIGH	WT. (LBS.)	UNIT COST
12"		F-12-TE	798617	1/12	2750	2200	1600	1.1	13	\$82.46
18"	Floor	F-18-TE	797290	1/8	5750	4700	3200	2.2	20	\$95.39
24"		F-24-TE	852852	1/8	6350	5200	3600	2.4	23	\$168.00
18"	High	F-18H-TE	797306	1/8	5750	4700	3200	2.2	27	\$128.62
24"	Stand	F-24H-TE	854061	1/8	6350	5200	3600	2.4	30	\$197.54

WORK STATION FANS







MOTOR 3-speed, 1 Ph., 120V sleeve bearing


permanently lubricated

SWITCH Pull chain

CORD SJT type 3 conductor, 10' long

Aluminum **BLADE GUARDS** Chrome plated

Meets OSHA Standards • 1 Year Limited Warranty



Mount with one bolt or lag screw to walls, ceilings, work benches, machines or any surface

Fan head rotates 360° in both the horizontal and vertical direction



SIZE	MODEL	UPC	MOTOR	MOTOR CFM			AMPS	SHIPPING	UNIT COST
SIZE	WIODEL	686334	HP	HIGH	MED	LOW	HIGH	WT. (LBS.)	UNIT COST
12"	U-12-TE	798600	1/12	2750	2200	1600	1.1	13	\$85.54
18"	U-18-TE	797283	1/8	5750	4700	3200	2.2	20	\$102.16
24"	U-24-TE	854078	1/8	6350	5200	3600	2.4	23	\$174.77



DIRECT DRIVE PORTABLE BLOWERS





- Powder coated 20 ga. steel housing
- 8" Rubber Wheels


SIZE	30" & 36" & 42"
MOTOR	2-speed on 30" & 36" model 1 speed on 42" model, Single Phase, 120 Volt, ball bearing, permanently lubricated, 1050 rpm, PSC type
SWITCH	Rocker
CORD	SJT type 3 conductor, 15' long
BLADE	3 paddle steel
GUARDS	Spiral wire - front and rear

Meets OSHA Standards • 1 Year Limited Warranty

Blade Size	MOTOR HP	MODEL	UPC 686334	CFM HIGH	CFM LOW	AMPS (HIGH)	SHIPPING WT.(LBS.)	UNIT COST
30"	1/4	PB 30-D	796538	7800	6000	2.5	65	\$312.62
36"	1/3	PB 36-D	796545	12500	9000	5.5	82	\$395.09
42"	1/2	PB 42-D	799843	15,	600	6.0	102	\$477.55

BELT DRIVE PORTABLE BLOWERS





SIZE 36" - 42" - 48"

MOTOR 1-speed, single phase, 120 volt, permanently lubricated ball bearing

SWITCH Rocker

CORD SJT type 3 conductor, 15' long

BLADE Steel

GUARDS Spiral wire - front and rear

- 10" Hard Rubber Wheels
- · Powder coated 20 ga. steel housing
- Swivel model rotates 360° in 12.5° increments and locks in place with a steel locking pin.

STANDARD MODEL						EL	SWIVEL MODEL						
SIZE	MOTOR			MODEL	UPC	WT.	UNIT	MODEL	UPC 686334	WT.	UNIT		
SIZL	₽	CFM	RPM	AMPS	WIODEL	686334	(LBS.)	COST	WODLE	OI C 000334	(LBS.)	COST	
36"	1/2	14,500	500	8.0	PB 36-B	796477	120	\$533.55	PBS 36-B	796507	145	\$628.94	
42"	3/4	18,200	430	11.0	PB 42-B	796484	135	\$582.78	PBS 42-B	796514	160	\$697.86	
48"	1	22.700	390	15.0	PB 48-B	796491	155	\$681.25	PBS 48-B	796521	180	\$813.56	

Meets OSHA Standards • 1 Year Limited Warranty

OSCILLATING OFFICE FANS







DESK FAN

- 3-speed oscillating fans with push button controls
- · 3 conductor SPT cord & plug
- · White powder Coated wire mesh guards
- · White plastic housing & blade
- · Stand fan extends to 40" height

Meets OSHA Standards / 1 Year Limited Warranty

SIZE	MODEL	UPC 686334	FAN TYPE	SPEEDS	CFM HIGH	AMPS HIGH	SHIPPING WT. (LBS.)	UNIT COST
12"	ODF-12	851305	DESK	3	1200	.4	5.4	\$33.23
16"	ODF-16	851312	DESK	3	2100	.5	8.5	\$39.39
16"	OSF-16	851329	STAND	3	2100	.5	15.5	\$43.08

STAND FAN

INDUSTRIAL CEILING FANS



- · All metal construction
- · Aluminum paddles
- · 18" Down rod with safety cable
- · Mounts to 3/8" diameter steel J-hook
- 18 pole, 115 V, 1 phase, capacitor type, impedance protected motor with sealed ball bearings

COMMERCIAL GRADE

- Assembly required
- · 18" lead wires
- · 1 Year Warranty

INDUSTRIAL GRADE

- Fully assembled except blade bolt down
- 3 Conductor cord, 4' long with plug
- · 3 Year Warranty

HEAVY DUTY GRADE

- Fully assembled except blade bolt down
- 3 Conductor cord, 6' long with plug
- 6 Year Warranty

GRADE	MODEL	UPC 686334	SIZE	СҒМ	RPM	AMPS	Shipping Weight	UNIT COST
Commercial	CHR-56	852968	56"	19000	320	1.0	19	\$85.54
Industrial	IHR-56	797153	56"	21000	310	.9	21	\$121.85
Heavy Duty	HDHR-60	799393	60"	47000	320	1.1	18	\$180.93

LOWER WINTER HEATING COSTS BY RECOVERING RESIDIAL HEAT TRAPPED AT ROOF LEVEL

MODEL	UPC 686334	ТҮРЕ	AMPS	UNIT COST
HR-SS-2	797634	1-2 FANS SPEED CONTROL	3 MAX.	\$22.77
HR-SS-5	797641	3-5 FANS SPEED CONTROL	6 MAX.	\$56.00



18" SELF CONTAINED POWER MISTERS



SELF CONTAINED MISTING SYSTEM WITH WATER PUMPED FROM A 10 GALLON COOLER

MOTOR	1-speed, 1/8 HP, 1 Phase, 120 volt, sleeve bearing, permanently lubricated, totally enclosed, permanent split capacitor.
SWITCH	Toggle - Fan only or Fan & Mist
CORD	SJT type - 3 conductor - 18' long with GFCI plug
BLADE	18" Aluminum
GUARDS	Spiral wire - front and rear
PUMP	130 psi diaphragm pump

Meets OSHA Standards / 1 Year Limited Warranty

POWER CUTOFF TIP SWITCH & GFCI PLUG FOR EXTRA SAFETY

MODEL	UPC	SIZE	TYPE	MOTOR	CF	М	AMPS	SHIPPING	UNIT COST
MODEL	686334	SIZE	TIPE	HP	HIGH	LOW	HIGH	WT. (LBS.)	UNIT COST
PM-18S	855471	18"	HAND CARRY	1/8	57	50	2.2	45	\$543.40

MINI-BLOWERS

TOTALLY ENCLOSED MOTOR ALLOWS MINI-BLOWER TO BE USED IN DIRTY OR DUSTY ENVIRONMENTS.



FLOOR MODEL



YOKE MOUNTED MODEL
WITH
OPTIONAL WALL/CEILING MOUNT

MOTOR 2-speed, 1/4 HP, 1 Phase, 120 volt, ball bearing, permanently lubricated, totally enclosed, permanent split capacitor. SWITCH Rotary on floor models Pull chain on yoke mounted model CORD SJT type - 3 conductor - 10' long **BLADE** Aluminum **GUARDS** Spiral wire - front and rear HOUSING Powder coated 20 ga. steel

Meets OSHA Standards / 1 Year Limited Warranty

MODEL	UPC	FAN	BLADE	CI	M	AMPS	SHIPPING	UNIT COST	
WODEL	686334	TYPE	SIZE	HIGH	LOW	AWIFS	WT.(LBS.)	UNIT COST	
MB 24-DF	798457	FLOOR STYLE	24"	6800	5000	2.2	52	\$280.01	
MB 24-DY	798464	YOKE STYLE	24	0000	3000	2.2	52	\$280.01	
MB 30-DF	798853	FLOOR STYLE	30"	7800	6000	2.5	58	\$316.32	
MB 30-DY	798860	YOKE STYLE	30	7800	0000	2.5	58	\$316.32	
MBM-W	798907	OPTIONAL WALL	OPTIONAL WALL/CEILING MOUNT FOR YOKE STYLE MINI-BLOWER						



MODULAR LOADING DOCK LIGHTS



HEAVY DUTY TRIPLE STRUT DOCK ARMS THAT CAN BE USED WITH 1 OF 2 LIGHTS & AN OPTIONAL FAN

STANDARD DUTY DUAL STRUT VERTICAL ADJUSTMENT DOCK ARMS THAT CAN BE **USED WITH 1 OF 2 LIGHTS**



Light Selection Chart & Illumination Levels					
DESCRIPTION		Incandescent	Quartz Halogen		
MAX. WATTAGE		300	500		
MAX. LUMENS		3,700	11,000		
AVG. BULB LIFE (HRS.)		2,000	2,000		
BULB INCLUDED		No	Yes		
Illuminations Levels	10' ft.	15	28		
Measured in Footcandles & Distance from Light Source	20' ft.	5	14		
	30' ft.	3	8		
	40' ft.	2	5		

HEAVY DUTY MODULAR LOADING DOCK LIGHTS





- 1-1/2" square, 14 gauge, steel tubing.
- 3" x 5" x 3/16" mounting plate attaches with (4) 3/8" bolts.
- 5' long., 18/3 SJTW conductor cord and NEMA 5-15 grounded plug.
- Horizontal adjustment only, up to 300°.



MODEL	UPC 686334	ARM LENGTH	SHIP WT.	UNIT COST
24-LDA	446532	24"	11 lbs.	\$46.16
40-LDA	446617	40"	18 lbs.	\$80.00
60-LDA	446624	60"	24 lbs.	\$92.31

- 3 conductor cord plugs into electrical junction box on arm.
- On/Off switch & wire guard included with each lighthead.

IVIC	oaui	ar Liç	gnts
•	18"	long,	18/3

- Modular Fan · 18" high velocity circulator, with 3 speed, 1/8 HP, 120V, 1-phase permanently lubricated, totally enclosed, PSC motor.
- Modular fan plugs into electrical outlet on arm
- Chrome plated metal guards
- Aluminum blades

MODEL	UPC 686334	Light Head Type	SHIP WT.	UNIT COST
DKL-INC	446563	Incandescent	5 lbs.	\$36.92
DKL-QH	446570	Quartz Halogen	6 lbs.	\$55.39

MODEL	UPC	CFM			AMPS	SHIP	UNIT
	686334					WT.	
LDF-18-TE	797184	5750	4700	3200	2.2	20 lbs.	\$98.46

STANDARD DUTY MODULAR LOADING DOCK LIGHTS



65-6

THE OUTER ARM ON 40" & 60" ARMS WILL SWING 300° IN HORIZONTAL PLANE & 210° IN VERTICAL PLANE

DOCK ARM MODEL	UPC 686334	ARM LENGTH	SHIPPING WT.	UNIT COST
DKL-40VA-ARM	446549	40"	18 lbs.	\$58.46
DKL-60VA-ARM	446556	60"	24 lbs.	\$73.85

Uses either modular dock light shown above





Versa-Kool® Patented Circulation Fans

More Comfort • More Productivity









VS8VK

VS12VK

VS20VK

VS24VK

VS36VKA


Model	Size	CFM	Volts	Phase	Amps	НР	RPM	Full-Fan Depth
VS8VK*	8"	466	115	Single	0.6	1/100	1550	9 1/2"
VS8VK-12V	8"	466	12	-	4.0	10 watts	1600	9 1/2"
VS12VK*	12"	2,600	115/230	Single	1.2/.45	1/10	1725	14"
VS12VK-12V	12"	2,600	12	-	5.6	45 watts	1725	14"
VS20VK*	20"	6,000	115/230	Single	3.5/1.8	1/3	1725	15 1/2"
VS24VK*	24"	8,500	115/230	Single	3.4/1.7	1/2	1725	16"
VS36VKA	36"	11,678	115/230	Single	5.2/2.6	1/2	840	17"
VS36VKB	36"	11,678	230/460	3-Phase	1.8/.9	1/2	825	17"

^{*}Variable speed capable.

The Schaefer Versa-Kool® circulation fan has a patented design that's superior to other fans on the market.

- Fan guard spacing is wider, providing greater air circulation.
- · The fan motor is maintenance-free and highly energy efficient.
- · Noise levels are low...well below OSHA requirements.
- Fans can be ceiling mounted or wall mounted, thereby remaining out
 of the way of material-handling equipment and eliminating employee
 safety hazards.
- Improves comfort by enhancing the normal body cooling process.
- Increases production and safety levels.
- · Improves work station air quality.
- · Reduces equipment and building condensation problems.
- · Provides an energy efficient design for low cost operation.













Model	Ceiling Mount	Wall Mount	Adaptable to Wall Oscillator	Adaptable to Floor Cart
20CFO	VS20FMT	VS2024WMT	Yes	Yes
24CFO	VS24FMT	VS2024WMT	Yes	Yes
30CFO	VS36FMT	VS36WMT	Yes	Yes
VS12VK	SUPPLIED	VS2024WMT	Yes	No
VS20VK	VS20FMT	VS2024WMT	Yes	No
VS24VK	VS24FMT	VS2024WMT	Yes	No
VS36VKA	VS36FMT	VS36WMT	No	No

It is recommended that the Versa-Kool® line of air circulators be mounted above seven feet.



Heavy-Duty Pedestal Fans (Oscillating & Non-Oscillating)







Shown with optional round pedestal base and wheel kit.

To Order with the Round Base, add an "R" after the "PF" in the model number. Example: 24PFR. Weights may vary. Call for Pricing.



12CFOS-SW Industrial Air Circulator

20/24/30FC Fan Cart

20/24/30/36CFO Fan head only

20/24/30/36PF Square Pedestal Fans Round pedestal base & wheel kit available

Pedestal Fans (PF) and Fan Heads (CFO) - Non-Oscillating, WD (Washdown Duty Fans) & Fan Carts

Model	Size	RPM	CFM	НР	Volts	Amps	Weight
20PF	20"	1100 / 800	3896 / 2857	1/4	115	2.9 / 1.6	57 lbs.
24PF	24"	1100 / 800	5100 / 3920	1/2	115	3.4 / 2.1	62 lbs.
30PF	30"	1100 / 800	9350 / 8125	1/2	115	4.3 / 3.1	81 lbs.
36PF	36"	1100 / 800	12,477/9080	1/2	115	4.7 / 3.5	87 lbs.
12CFOS-SW	12"	1550	1215	1/30	115	.9	14 lbs.
20CFO	20"	1100 / 800	3896/2857	1/4	115	2.9 / 1.6	29 lbs.
24CFO	24"	1100 / 800	5100 / 3920	1/2	115	3.4 / 2.1	34 lbs.
30CFO	30"	1100 / 800	9350/8125	1/2	115	4.3 / 3.1	53 lbs.
36CFO	36"	1100 / 800	12,477 / 9080	1/2	115	4.7 / 3.5	59 lbs.
20FC	20"	1100 / 800	3896 / 2857	1/4	115	2.9 / 1.6	54 lbs.
24FC	24"	1100 / 800	5100 / 3920	1/2	115	3.4 / 2.1	64 lbs.
30FC	30"	1100 / 800	9350 / 8125	1/2	115	4.3 / 3.1	83 lbs.

Pedestal Fans (PF) and Fan Heads (CFO) - Oscillating - Two-speed

				-			
Model	Size	CFM	RPM	HP	Volts	Amps	Weight
20PF-OSC	20"	4054 / 3639	1075	1/4	115	4.4 / 2.2	63 lbs.
20CFO-OSC	20"	4054 / 3639	1075	1/4	115	4.4 / 2.2	35 lbs.
24PF-OSC	24"	5220 / 4440	1075	1/2	115	3.8 / 2.3	69 lbs.
24CFO-OSC	24"	5220 / 4440	1075	1/4	115	3.8 / 2.3	41 lbs.
30PF-OSC	30"	9800 / 9300	1075	1/2	115	4.3 / 3.1	90 lbs.
30CFO-OSC	30"	9800 / 9300	1075	1/2	115	4.3 / 3.1	62 lbs.
36PF-OSC	36"	12,173 / 9080	1075	1/2	115	4.6 / 4.0	100 lbs.
36CFO-OSC	36"	12,173 / 9080	1075	1/2	115	4.6 / 4.0	72 lbs.

Fan Features:

- Two-speed pull chain, totally enclosed, maintenance free, heavy duty ball bearing, permanent split capacitor, thermally protected motor.
- Durable urethane coated fan guard meets OSHA requirements.
- 10', 115 volt grounded cord included.

Pedestal Features:

- Two-piece pedestal adjusts from 31/21 to 61.
- Rugged 13 gauge steel with black powder coated finish.
- Sturdy base 30" diameter.

Fan Cart Features:

- Handy and powerful 24" and 30" mobile fan.
- Adjustable floor stand allows for air circulation in multiple positions. • 8" semi-pneumatic wheels.



Stainless Steel Washdown Duty Fans

Schaefer Ventilation steel fans are designed to withstand moist / wet environments along with high-pressure cleaning with concentrated caustic solutions without affecting performance or functionality.

Choose from 24" or 30", all stainless, paint-free or washdown duty.





24CFO-WD

30CFO-WD

• 24CFO-WD: diameter 27" x 16" deep • 30CFO-WD: diameter 33.5" x 17" deep

24" & 30" Stainless Steel Washdown Duty Fans

This fan is ideally suited for comfort cooling in food and beverage processing facilities and other high humidity or washdown environments.

It is constructed with electro-polished 304 stainless steel approved by the USDA and the NSF for Food Zones and the guards are OSHA spaced. The motor has USDA approved electrostatically applied epoxy finish. Three-phase models available.

Features:

All Stainless: These models have non-porous, electro-polished 304 stainless steel guards, stainless steel blades, and an all stainless steel motor.

Paint-Free: These models have non-porous, electro-polished stainless steel guards, stainless steel blades, and a stainless steel, paint-free motor constructed with anodized aluminum end bells.

Washdown Duty: These models have non-porous, electro-polished stainless steel guards, stainless steel blades, and a moisture resistant motor.

Model	Description
24CFO-WD	24" Circulation fan, stainless steel OSHA guards, stainless steel blade, washdown duty moisture resistant motor
24CFO-SSPF	24" Circulation fan, stainless steel OSHA guards, stainless steel blade, paint-free motor
24CFO-SSPF3	24" Circulation fan, stainless steel OSHA guards, stainless steel blade, paint-free motor, 3-phase motor
24CFO-SS	24" Circulation fan, stainless steel OSHA guards, stainless steel blade, stainless steel motor
24CFO-SS3	24" Circulation fan, stainless steel OSHA guards, stainless steel blade, stainless steel motor, 3-phase motor
30CFO-WD	30" Circulation fan, stainless steel OSHA guards, stainless steel blade, washdown duty moisture resistant motor
30CFO-SSPF	30" Circulation fan, stainless steel OSHA guards, stainless steel blade, paint-free motor
30CFO-SSPF3	30" Circulation fan, stainless steel OSHA guards, stainless steel blade, paint-free motor, 3-phase motor
30CFO-SS	30" Circulation fan, stainless steel OSHA guards, stainless steel blade, stainless steel motor
30CFO-SS3	30" Circulation fan, stainless steel OSHA guards, stainless steel blade, stainless steel motor, 3-phase motor
30010-333	On Chiculation ran, stanness steel Ooi in guarus, stanness steel blade, stanness steel motor, s-priase motor



Versa-Kool® Portable and Oscillating Fans



VS36PKM-B



Patented VS36VKM* VS36VKM-2 VS42VKM-2



Patented VS36VKT* VS36VKT-2





Patented VS36VKO* VS36VKO-2

Model	Size	CFM	HP	Volts	Amps	Туре	Depth
VS36PKM-B	36"	10,000	1/2	115	5.2 / 2.6	Direct-Drive	16¹/s"
VS36VKM*	36"	11,000	1/2	115/230	5.2 / 2.6	Direct-Drive	20"
VS36VKM-2	36"	9,490 / 6,585	1/2	115	6.0 / 3.0	Belt-Drive	251/4"
VS42VKM-2	42"	18,600 / 14,100	3/4	115	8.9 / 5.2	Belt-Drive	271/2"
VS36VKT*	36"	11,000	1/2	115/230	5.2 / 2.6	Direct-Drive	20"
VS36VKT-2	36"	9,490 / 6,585	1/2	115	6.0 / 3.0	Belt-Drive	25"
VS36VKWO*	36"	11,000	1/2	115/230	5.2 / 2.6	Direct-Drive	20"
VS36VKO*	36"	11,000	1/2	115/230	5.2 / 2.6	Direct-Drive	20"
VS36VKO-2	36"	9,490 / 6,585	1/2	115	6.0 / 3.0	Belt-Drive	25"

*Available in black



Heavy Duty - Industrial

36", 42" & 48" Mobile Box Fan

- Fully assembled. Two-speed.
- Galvanized housing is long lasting and corrosion resistant.
- Heavy-duty caster wheels for easy movement (two lockable).
- "Ultra Quiet" operation while maintaining a high CFM output.
- Cast iron pulleys to prevent warping. Cogged V-belt to prevent slippage.
- Totally enclosed motor with automatic thermal protection.
- Industrial type sealed bearings, cast iron, can be regreased.
- Front and back guards meet OSHA requirements.
- On/Off switch, with UL approved nine foot cord with cord wrap.
- Heavy-duty handle for easier movement. Six-wing galvanized blade.

Model	Size	HP	Speed	Volts	RPM	CFM
MOB36612-2	36"	1/2	2-speed	115	398 / 263	9556 / 6315
MOB42634-2	42"	3/4	2-speed	115	360 / 238	14,448 / 9548
MOB4861-2	48"	1	2-speed	115	360 / 238	20,679 / 13,666



Galvanized Panel Fan

Our fans feature a heavy-duty galvanized construction that is long lasting and corrosion resistant. Specifically designed for "Ultra Quiet" operation while maintaining a high CFM rating.













Three Wing Panel

Six Wing Panel

Narrow Box with Cone Kit

Wide Box with OSHA Guard

Slant Wall with Shutter

Slant Wall with Cone Kit

Model	Description	Motor Specs	Performance	Weight
246P12	24" six-wing fan	1/2 hp, 115/230v	6600 cfm*	75 lbs.
246P12-3	24" six-wing fan	1/2 hp, 230/460v, three-phase	6400 cfm*	75 lbs.
363P12	36" three-wing fan	1/2 hp, 115/230v	11,900 cfm*	85 lbs.
366P12	36" six-wing fan	1/2 hp, 115/230v	10,900 cfm*	95 lbs.
363P12-2	36" three-wing fan	1/2 hp, 230v, two-speed	11,900 / 7900 cfm*	85 lbs.
366P12-2	36" six-wing fan	1/2 hp, 230v, two-speed	10,900 / 7200 cfm*	95 lbs.
363P12-3	36" three-wing fan	1/2 hp, 230/460v, three-phase	11,900 cfm*	85 lbs.
366P12-3	36" six-wing fan	1/2 hp, 230/460v, three-phase	10,900 cfm*	95 lbs.
423P34	42" three-wing fan	3/4 hp, 115/230v	16,400 cfm*	103 lbs.
426P34	42" six-wing fan	3/4 hp, 115/230v	16,490 cfm*	115 lbs.
423P34-2	42" three-wing fan	3/4 hp, 230v, two-speed	16,400 / 10,838 cfm*	103 lbs.
426P34-2	42" six-wing fan	3/4 hp, 230v, two-speed	16,490 / 10,897 cfm*	115 lbs.
423P34-3	42" three-wing fan	3/4 hp, 230/460v, three-phase	16,400 cfm*	103 lbs.
426P34-3	42" six-wing fan	3/4 hp, 230/460v, three-phase	16,490 cfm*	115 lbs.
483P1	48" three-wing fan	1 hp, 115/230v	22,730 cfm*	120 lbs.
486P1	48" six-wing fan	1 hp, 115/230v	23,609 cfm*	135 lbs.
483P1-2	48" three-wing fan	1 hp, 230v, two-speed	22,730 / 15,021 cfm*	120 lbs.
486P1-2	48" six-wing fan	1 hp, 230v, two-speed	23,609 / 15,602 cfm*	135 lbs.
483P1-3	48" three-wing fan	1 hp, 230/460v, three-phase	22,730 cfm*	120 lbs.
486P1-3	48" six-wing fan	1 hp, 230/460v, three-phase	23,609 cfm*	135 lbs.

Factory assembled and inspected to insure smooth operation. *Tested at 0 S.P. Fans tested in compliance with AMCA standards. *Other motor options available - Call for details except on the 246P12 & 246P12-3.

Housing Options/Accessories

Box fan kits, slant wall fan kits, cone kits, shutter kits, hardware cloth kits, OSHA guards, pole and horizontal mounts.

Call for pricing information on housing options and accessories.



52" Fiberglass Exhaust Fans



523CF1

Features:

- One-piece molded fiberglass housing.
- · Rugged polyethylene cone.
- · Heavy-duty, totally enclosed, maintenance free, and energy efficient motors.
- Galvanized and stainless blades offer better balance, less vibration, less drag, and more efficiency than cast blades but offer the same lifetime warranty!
- · Gates Tri-Power® molded notch belts with special Vextra® construction. Automatic tensioner standard on all models.

Model	Description	Performance
523CF1	52" Belt drive exhaust fan with cone, 3-wing galvanized blade, 1 hp motor	26,960 cfm
523CF1-2	52" Belt drive exhaust fan with cone, 3-wing galvanized blade, 1 hp 2-speed motor	25,851 / 17,084 cfm
523CF1-3	52" Belt drive exhaust fan with cone, 3-wing galvanized blade, 1 hp 3-phase motor	27,439 cfm
523CF1SS	52" Belt drive exhaust fan with cone, 3-wing stainless steel blade, 1 hp motor	26,960 cfm
523CF1SS-2	52" Belt drive exhaust fan with cone, 3-wing stainless steel blade, 1 hp 2-speed motor	25,851 / 17,084 cfm
523CF1SS-3	52" Belt drive exhaust fan with cone, 3-wing stainless steel blade, 1 hp 3-phase motor	27,439 cfm
526CF1	52" Belt drive exhaust fan with cone, 6-wing galvanized blade, 1 hp motor	24,624 cfm
526CF1-2	52" Belt drive exhaust fan with cone, 6-wing galvanized blade, 1 hp 2-speed motor	23,652 / 15,631 cfm
526CF1-3	52" Belt drive exhaust fan with cone, 6-wing galvanized blade, 1 hp 3-phase motor	25,281 cfm
526CF1SS	52" Belt drive exhaust fan with cone, 6-wing stainless steel blade, 1 hp motor	24,624 cfm
526CF1SS-2	52" Belt drive exhaust fan with cone, 6-wing stainless steel blade, 1 hp 2-speed motor	23,652 / 15,631
526CF1SS-3	52" Belt drive exhaust fan with cone, 6-wing stainless steel blade, 1 hp 3-phase motor	25,281 cfm

Performance tested at .05 static pressure. Performances may vary.



36", 42" & 48" Fiberglass Exhaust Fans

The Schaefer fiberglass ventilation fan with revolutionary tapered design has no corners to block air or collect dirt and dust. Housing is constructed of molded fiberglass that carries a lifetime guarantee.

One-time balancing of propellers ensures peak performance for greater efficiency.



- Special scallop-designed, static balanced, galvanized fan blades ensure quiet operation with high performance.
- Stainless steel blades available.
- · Industrial-type, cast-iron greased bearings can be regreased.
- Motors are energy efficient, totally enclosed air-over with automatic thermal protection. Single phase or three phase available.
- · Rugged fiberglass slant wall housing with lifetime warranty.
- · Factory assembled and test run to ensure smooth operation.
- · Automatic, self-adjusting belt-tightener.
- · Heavy duty aluminum shutter.
- Epoxy coated front guard.

Description	Motor Specs	Performance
36" Fiberglass - Galv. 3-wing	1/2 hp, 115/230v, 713 rpm, 6.4/3.2 amps, belt-drive	9600 cfm
36" Fiberglass - Galv. 3-wing	1/2 hp, 230v, 713/472 rpm, 2.5/1.4 amps. belt-drive, 2-speed	9600/6344 cfm
36" Fiberglass - Galv. 6-wing	1/2 hp, 115/230v, 454 rpm, 6.4/3.2 amps, belt-drive	11,012 cfm
36" Fiberglass - Galv. 6-wing	1/2 hp, 230v, 454/300 rpm, 2.5/1.4 amps, belt-drive, 2-speed	11,012 / 7277 cfm
36" Fiberglass - Galv. 3-wing	1/2 hp, 115/230v, 840 rpm, 6.2/3.1 amps, direct-drive	9610 cfm
36" Fiberglass - SS, 3-wing	1/2 hp, 115/230v, 840 rpm, 6.2/3.1 amps, direct-drive	9780 cfm
42" Fiberglass - Galv. 3-wing	3/4 hp, 115/230v, 521 rpm, 9.8/4.9 amps, belt-drive	14,812 cfm
42" Fiberglass - Galv. 3-wing	3/4 hp, 230v, 521/347 rpm, 3.8/1.9 amps, belt-drive	14,812/9789 cfm
42" Fiberglass - Galv. 6-wing	3/4 hp, 115/230v, 392 rpm, 9.8/4.9 amps, belt-drive	15,652 cfm
42" Fiberglass - Galv. 6-wing	3/4 hp, 230v, 392/259 rpm, 5.8/3.8 amps, belt-drive	15,652 / 10,344 cfm
48" Fiberglass - Galv. 3-wing	1 hp, 115/230v, 547 rpm, 12.1/6.05 amps, belt-drive	18,614 cfm
48" Fiberglass - SS, 3-wing	1 hp, 115/230v, 471 rpm, 12.1/6.05 amps, belt-drive	16,027 cfm
48" Fiberglass - Galv. 3-wing	1 hp, 230v, 505/334 rpm, 5.3/3.0 amps, belt-drive, 2-speed	17,184 / 11,366 cfm
48" Fiberglass - SS, 3-wing	1 hp, 230v, 471/311 rpm, 5.3/3.0 amps, belt-drive, 2-speed	16,027 / 10,583 cfm
48" Fiberglass - Galv. 6-wing	1 hp, 115/230v, 370 rpm, 12.1/6.05 amps, belt-drive	22,365 cfm
48" Fiberglass - Galv. 6-wing	1 hp, 230v, 337/222 rpm, 5.3/3.0 amps, belt-drive, 2-speed	20,570 / 13,419 cfm
	36" Fiberglass - Galv. 3-wing 36" Fiberglass - Galv. 3-wing 36" Fiberglass - Galv. 6-wing 36" Fiberglass - Galv. 6-wing 36" Fiberglass - Galv. 3-wing 36" Fiberglass - Galv. 3-wing 36" Fiberglass - Galv. 3-wing 32" Fiberglass - Galv. 3-wing 32" Fiberglass - Galv. 6-wing 32" Fiberglass - Galv. 6-wing 32" Fiberglass - Galv. 6-wing 38" Fiberglass - Galv. 3-wing 38" Fiberglass - SS, 3-wing 38" Fiberglass - SS, 3-wing 38" Fiberglass - Galv. 3-wing	1/2 hp, 115/230v, 713 rpm, 6.4/3.2 amps, belt-drive 1/2 hp, 230v, 713/472 rpm, 2.5/1.4 amps. belt-drive, 2-speed 1/2 hp, 115/230v, 454 rpm, 6.4/3.2 amps, belt-drive, 2-speed 1/2 hp, 115/230v, 454 rpm, 6.4/3.2 amps, belt-drive 1/2 hp, 230v, 454/300 rpm, 2.5/1.4 amps, belt-drive, 2-speed 1/2 hp, 230v, 454/300 rpm, 2.5/1.4 amps, belt-drive, 2-speed 1/2 hp, 115/230v, 840 rpm, 6.2/3.1 amps, direct-drive 1/2 hp, 115/230v, 840 rpm, 6.2/3.1 amps, direct-drive 1/2 Fiberglass - Galv. 3-wing 1/2 hp, 115/230v, 521 rpm, 9.8/4.9 amps, belt-drive 1/2 Fiberglass - Galv. 3-wing 1/3 hp, 230v, 521/347 rpm, 3.8/1.9 amps, belt-drive 1/2 Fiberglass - Galv. 6-wing 1/2 hp, 115/230v, 392 rpm, 9.8/4.9 amps, belt-drive 1/2 Fiberglass - Galv. 6-wing 1/2 hp, 115/230v, 392 rpm, 9.8/4.9 amps, belt-drive 1/2 Fiberglass - Galv. 6-wing 1/2 hp, 115/230v, 392 rpm, 12.1/6.05 amps, belt-drive 1/2 Fiberglass - Galv. 3-wing 1/2 hp, 115/230v, 471 rpm, 12.1/6.05 amps, belt-drive 1/2 Fiberglass - SS, 3-wing 1/2 hp, 115/230v, 471 rpm, 12.1/6.05 amps, belt-drive 1/2 Fiberglass - SS, 3-wing 1/2 hp, 115/230v, 471 rpm, 5.3/3.0 amps, belt-drive 1/2 Fiberglass - SS, 3-wing 1/2 hp, 115/230v, 370 rpm, 12.1/6.05 amps, belt-drive

Flushmount fans are also available in three-phase. To order add a 3 to the end of the model. Example: FM3600-1G3. Performances at .05 static pressure.

• Stainless steel blades equipped on model numbers ending with -S. • Galvanized blades equipped on model numbers ending with -G.

36" Direc	ct-Drive Rough-In Openings	36" Belt-Drive Rough-In Openings		
38	8¾" high X 37½" wide	441/4" high X 437/8" wide		
	42" Rough-In Openings	48" Rough-In Openings		
	51" high X 501/2" wide	561/4" high X 553/4" wide		



Exhaust Fans & Shutters Fans

9", 12", 16", 20" & 24" **Polyethylene Flush-Mount Exhaust Fans**

- · Heavy-Duty Motors Totally enclosed, thermally protected, pre-lubricated ball bearings. Specifically designed for less energy consumption.
- Fan Blades Energy efficient polypropylene construction. Rust and corrosion resistant. Unique design allows for efficient operation and perfect balance.
- Fan Housing Heavy molded polyethylene construction. Won't rust or corrode never needs painting. Easy-clean design. Lifetime warranty on fan housing.
- Fan Guards All fans have a heavy gauge, welded wire, front and back guard which is PVC vinyl coated for corrosion resistance.
- . Shutters All-weather PVC shutters constructed of white poly materials and assembled with nylon bearings. Aero-dynamically efficient.





Model	Description	Motor Specs	Performance
PFM0900-1*	9" Polyethylene exhaust fan	1/6 hp, 115/230v, 3000 rpm, 1.9/1.0 amps	1091 cfm
PFM1200-1*	12" Polyethylene exhaust fan	1/3 hp, 115/230v, 1725 rpm, 3.8/1.9 amps	1604 cfm
PFM1200-2	12" Polyethylene exhaust fan	1/3 hp, 115v, 1350/1725 rpm, 2.8/2.3 amps, 2-speed	1604 / 1075 cfm
PFM1600-1*	16" Polyethylene exhaust fan	1/3 hp, 115/230v, 1720 rpm, 3.8/1.9 amps	3085 cfm
PFM1600-2	16" Polyethylene exhaust fan	1/3 hp, 115v, 1350/1725 rpm, 2.8/2.3 amps, 2-speed	3088 / 2198 cfm
PFM2000-1*	20" Polyethylene exhaust fan	1/3 hp, 115/230v, 1720 rpm, 3.8/1.9 amps	3533 cfm
PFM2000-2	20" Polyethylene exhaust fan	1/3 hp, 115v, 1350/1725 rpm, 2.8/2.3 amps, 2-speed	3540 / 2591 cfm
PFM6000-1*	20" Polyethylene exhaust fan	1/2 hp, 115/230v, 1720 rpm, 4.8/2.4 amps	4966 cfm
PFM6000-3	20" Polyethylene exhaust fan	1/2 hp, 230/460v, 1720 rpm, 1.2/.6 amps, 3-phase	4966 cfm
PFM2400-1A	24" Polyethylene exhaust fan	1/2 hp, 115/230v, 1725 rpm, 4.8/2.4 amps	7200 cfm
PFM2400-13A	24" Polyethylene exhaust fan	1/2 hp, 230/460v, 1725 rpm, 1.2/.6 amps	7200 cfm
Fan performances at .05	static pressure.		

Shutter Fans

Shutter Fan

Heavy-duty, totally enclosed, maintenance free, and energy efficient motors. Rugged PVC corrosion-proof construction.



Motorized Intake

SF1012-1	16	
SF2030-1	20"	3
		10

Model	Size	CFM	HP	RPM	Volts	Amps	Rough-in Size
SF1276-1	12"	760	1/30	1550	115	.7	12 ⁵ /8" Sq.
SF1612-1	16"	1250	1/10	1720	115/230	.9/.45	16 ⁵ / ₈ " Sq.
SF2030-1	20"	3000	1/6	1720	115/230	2.4/1.2	20 ⁵ / ₈ " Sq.

12", 16" and 20" motorized intakes also available.

Fan Controls Available!



Portable Misting Fan




Reduces air temperature up to 20°F





- · Rental · Outdoor Retail · Fire Departments/Rescue Squads
- · Pools, Patios and Decks · Construction and Job Sites
- · Sporting Events · Tent Rentals · Camping/Resorts

Heat can be a major problem on many job sites, causing



system, resulting in a rugged and portable cooling unit designed for fast heat relief. VersaMist[®] cools a 180 square foot area for about 5 hours, and the Mighty Mister™ approximately eight hours.

Model	Description	Amps	Volts	Watts	HP	PSI	Weight
VersaMist®							
PVM1200	Complete	60	1.6	115	-	1/10	27 lbs.
PVM1200-12V	Complete	60	9.4	12	45	-	23 lbs.
Mighty Mister®							
MM120	Complete	60	1.6	115	-	1/10	38 lbs.
MM120-12V	Complete	60	7.2	12	45	-	34 lbs.

*220 Volt VersaMist® or Mighty Mister® models available by special order.



Portable Foa Fan

Reduces air temperature up to 35°F

The VersaFog® is our most powerful cooling fan. It features a high-pressure cooling fog and an industrial-quality 36" oscillating fan that distributes cool air up to 65 feet.

- · Auto drain valve reduces nozzle clogging.
- 12 nozzle ring with brass & stainless steel nozzles and fixtures.
- High quality pump designed to withstand many years of use.
- · Fan oscillates for wide coverage range.
- High quality pump with low pressure shut-off protection.
- · Auto drain valve reduces nozzle clogging.
- Fan oscillates at 90 degree arc and tilts up and down.
- · Model available in black.

Model	Size	CFM	RPM	HP	Volts	Amps	Weight
VS36VKOFOG	36"	11,000	840	1/2	115/230	6.2 / 3.1	265 lbs.





Portable Misting Fans & Kits



24", 30" & 36" Pedestal Fan with High Pressure Mist Kit and Pump

Portable, high-velocity, two-speed, oscillating fans with a three or four nozzle, stainless-steel, powder-coated misting ring. Integral high-pressure (1,000 PSI), positive-displacement pump with primary filtration. Two-speed.

Model	Description	HP	Volts	CFM
24PFRM	24" pedestal fan w/mist kit	1/4	115	5100 / 3920
30PFRM	30" pedestal fan w/mist kit	1/2	115	9350 / 8125
36PFRM	36" pedestal fan w/mist kit	1/2	115	12,477 / 9080
24PFRM-OSC	24" osc. pedestal fan w/mist kit	1/4	115	5200 / 4440
30PFRM-OSC	30" osc. pedestal fan w/mist kit	1/2	115	9800 / 9300
36PFRM-OSC	36" osc. pedestal fan w/mist kit	1/2	115	12,173 / 9080



24" & 30" Fan Cart with High Pressure Mist Kit and Pump

Ideal for use where air circulation and mist cooling is required from ground level. Adjustable floor stand allows for air circulation in multiple positions. Two-speed.

Mod	lel	Size	HP	Volts	Amps	CFM
24F	СМ	24" fan cart w/kit	1/4	115	2.9 / 1.6	5100 / 3920
30F	СМ	30" fan cart w/kit	1/2	115	4.7 / 3.5	9350 / 8125

Low Pressure Misting Kits 20", 24", 30" & 36" Fans

Our low pressure misting kits provide an economical alternative for evaporative cooling, while still supplying up to the equivalent of two cooling tons* per fan. The low pressure system can operate with supply pressures as low as 40 PSI**.

*The temperature and relative humidity of the area being cooled determine the maximum cooling capacity.


**The available supply pressure determines the number of fans that can be supplied from a single water source.

Low Pressure Hose

Spin-Down™ Filter



Low Pressure Hose



MK-200B

Model	Description
MKLP36	Low Pressure Multiple Fan Misting Kit (30" & 36" fans) (Six mist heads included)
MKLP20	Low Pressure Multiple Fan Misting Kit (20" & 24" fans) (Four mist heads included)
MK-FK	Spin-Down™ Filter Kit
MK-BH	3/4" Low Pressure Hose - (Order by the foot)



Water

Mist Ring Kits

- All brass fittings. Reinforced braided nylon hose with PVC jacket.
- Brass nozzles with stainless steel inserts. (Can be cleaned easily.)
- Spray pattern engineered for optimum performance.
- Mist ring attaches easily to fan.

MK-1200	Fits 12" tans
MK-100B	Fits 20" & 24" fans
MK-200B	Fits 30" & 36" fans



The Best Portable Evaporative Cooler Available!

Oscillating



WayCool® reduces air temperature up to 20°F



The unique WayCool® design dramatically outperforms all other portable evaporative coolers, with greater cool air output, smaller size, lower cost and good looks.

WayCool® shown with optional . manual







WayCool® and Oscillating WayCool® Specifications

220 volt WayCool® available by special order.

Model	НР	Volts	Air (MPH) Velocity	Base	Height	Weight*	Discharge Opening	Water Capacity (Gallons)
WC-1/3HP	1/3	115	25.5	25x25	42"	98 lbs.	8x15	14
WC-1/3HP-OSC	1/3	115	25.5	25x25	42"	103 lbs.	8x15	14
WC-1HP4X4	1	115	n/a	33x33	49"	190 lbs.	n/a	24
WC-1HP	1	115	40	33x33	52"	190 lbs.	9x18	24
WC-1HP-OSC	1	115	40	33x33	52"	195 lbs.	9x18	24
WC-1HPMF**	1	115	40	33x33	52"	190 lbs.	9x18	24
WC-1HPMFOSC**	1	115	40	33x33	52"	195 lbs.	9x18	24
WC-1HP-DHL****	1	115	40	33x33	52"	220 lbs.	9x18	24

* Weights do not include water or shipping skid. **Manual fill. **** Designated Hazardous Location model.

-OSC oscillates (patented).

Features:

- Two-speed centrifugal blower for quiet operation that blows cool air up to 100 feet.
- Uniquely designed cooling pads on all four sides for maximum efficiency.
- High impact ABS plastic with UV protection. Minimal maintenance required.
- Auto hose fill or self-contained tank for stand-alone operation.

Options: Manual fill and water level gauge, pneumatic wheels and water conditioner and cleaners available.

Versa-Filler

50 Gallon Water Supply Reservoir

Easy garden hose hook-up to either the Pro-Kool or WayCool models.

- Portable Compact Durable
- Easy to read water level
- Rugged impact resistant design
- Easy to clean
- Weight: 42 lbs.







Schaefer's Pro-Kool® portable evaporative cooler boasts a powerful 1/3 or 1 hp fan which delivers 20% more cool air while using less energy!

- · Attractive grey slate finish · More powerful · More energy efficient
- More cool air Less noise Less floor space

Model	HP	Volts	Base	Height	CFM	Water Capacity
PROK28-2	1/3	115	43" x 30.5" deep	55"	7034/5729	18 gallons
PROK142-2	1	115	52" x 34" deep	70"	12,418/8207	38 gallons
PROK142-2HV	1	115	52" x 34" deep	70"	14,232/9406	38 gallons



Electric Radiant Heaters







Instant heat within seconds! Warm people and objects and not the air in between, making these heaters ideal for drafty areas (indoor models) and external use (outdoor models only).





Rio





TANSUN ELECTRIC HEATERS

Algarve Indoor	Outdoor	Heaters
----------------	---------	----------------

Algarve 1200 watt w/plug - black	T-ALG-212PB
Algarve 1200 watt w/plug - green	T-ALG-212PG
Algarve 1200 watt w/plug - white	T-ALG-212PW
Algarve 1200 watt w/plug - silver	T-ALG-212PS
Algarve - black - 220 volt w/plug	T-ALG-220VPB
Algarve - 220 volt w/plug - green	T-ALG-220VPG
Algarve replacement bulb 115 volt	T-ALGSB15
Algarve replacement bulb 230 volt	T-ALGSB23

Sorrento Indoor Heater (outdoor under cover)

Rio Indoor Heater (outdoor under cover)

Ibiza Indoor Heater

Ibiza heater 1500 watt - 120V - silverT-IH-15

Apollo Indoor Heaters

 Apollo 1500 watt (1.5Kw) - ivory.
 T-A1A-15

 Apollo 3000 watt (3.0Kw) - ivory.
 T-A1B-30

 Apollo 4500 watt (4.5Kw) - ivory
 T-A1C-45

Plaq Indoor Heaters

 Plaq heater - 1300 watt - 240V - ivory
 T-PH-13

 Plaq heater - 2000 watt - 240V - ivory
 T-PH-20

Spotter Indoor Heater



Gas & Electric Radiant Heaters



Zubri Portable Heaters

One of the best solutions available to restaurants, rental companies, event planners and homeowners. There isn't anything on the market as lightweight and durable as the portable Zubri heaters! Available in several configurations including models at 24,000 and 40,000 BTUs. Each of these have an optional carry case and reflector bag for easy transportation.

Features

- · No tools necessary to assemble
- · Available in charcoal gray
- Adjustable heat control
- Hard-shell carrying case
- · Carrying bag for reflector

Benefits

- Lightweight
- Portable
- · Quiet operation
- · Economical to operate



40,000 BTU

- Z1-12CK
- 40,000 BTU
- 7'3" high
- Weighs 49 lbs.
- Heats approximately 18'-20' wide area
- Utilizes 20 lb. propane tank (not included)
- Outdoor use only

24,000 BTU

- Z1-8CK
- 24,000 BTU
- 7'2" high
- Weighs 41 lbs.
- Heats approximately 16'-18' wide area
- Utilizes 20 lb. propane tank (not included)
- · Outdoor use only
- Easily converts to a table top. Model featured below.



Zubri Classic Portable Heater

The Zubri Classic propane heater, offers a comfortable 45,000 BTUs of heat. It's stainless steel body makes it robust, rust-proof and attractive.

Features

- · Stainless-steel finish
- · Built-in Piezo spark igniter
- · Adjustable heat control
- Fixture kit for permanent installation

Benefits

- Attractive
- Durable
- Quiet operation
- · Economical to operate

45,000 BTU

- Z1-14SS
- 45,000 BTU
- 7'4" high
- Weighs 48 lbs.
- Heats approximately 20' wide area
- Utilizes 20 lb. propane tank (not included)
- Outdoor use only









Innovative Electric & Gas Radiant Heaters




The Schaefer line of VersaHeat® radiant heaters is different from other heaters on the market in one very fundamental way - the IRLens™. The IRLens™ is an exclusive, unique and patented "lens" that is fitted on

VersaHeat® heaters. The revolutionary design of the IRLens™ captures the majority of the infrared wasted by ALL other heaters on the market and FOCUSES it on a targeted area or zone...thus spot heating it! As a result, the VersaHeat® can:

- · Allow you to heat target areas.
- · Heat objects not buildings.
- Achieve a far greater temperature increase in target area than conventional infrared heaters.
- · Yield dramatic energy savings by heating only the target area, results in a reduction of current heating cost up to 90%.









-1	
-	

	Portable	Pedestai
Model	Description	
Electric Spot	Standard (Heater Only)	
VHE-200	VersaHeat® electric 5 power spot 1500 watt 120 volt	
VHE-202	VersaHeat® electric 5 power spot 1500 watt 240 volt	
VHE-226	VersaHeat® electric 5 power spot 3000 watt 120/240 volt	
VHE-277	VersaHeat® electric 5 power spot 5000 watt 240/480 volt	
Electric Spot	Portable	
VHE-221	VersaHeat® electric 5 power spot portable 1500 watt 120 volt	
VHE-223	VersaHeat® electric 5 power spot portable 1500 watt 240 volt	
VHE-266	VersaHeat® electric 5 power spot portable 3000 watt 120/240 volt	
VHE-297	VersaHeat® electric 5 power spot portable 5000 watt 240/480 volt	
Electric Spot	Pedestal	
VHE-242	VersaHeat® electric 5 power spot pedestal 1500 watt 120 volt	
Electric Aisle	Standard (Heater Only)	
VHE-100	VersaHeat® electric 5 power aisle 1500 watt 120 volt	
VHE-126	VersaHeat® electric 5 power aisle 3000 watt 120/240 volt	
VHE-130	VersaHeat® electric 5 power aisle 3000 watt 240/480 volt	
Natural Gas Spot	Standard (Heater Only)	
VHN-200	VersaHeat® natural 3 power spot 33,000 BTU	

Low & High Intensity Gas Heaters

Cut heating costs up to 75% or more with Schaefer Gas Infra-Red Heaters.



Model	Description							
High Intensity (C	High Intensity (Ceramic)							
K-60DSAN K-100DSAN K-150DSAN	60,000 BTUH, Direct spark ignition, natural gas heater 100,000 BTUH, Direct spark ignition, natural gas heater 150,000 BTUH, Direct spark ignition, natural gas heater							
Low Intensity (To	ube)							
GQS-75-20MBN	75,000 BTUH, Natural gas, 20' length, straight system							
GQS-100-30BN	100,000 BTUH, Natural gas, 30' length, straight system							
GQS-150-40CN	150,000 BTUH, Natural gas, 40' length, straight system							
For a complete list of	f Schaefer heating products, refer to the complete price list.							



Innovative Electric Radiant Heaters

Heatstrip Electric Heater

The **HEATSTRIP** is a high intensity, over head mounted, electric radiant heater which provides an effective and efficient solution for outdoor and indoor heating applications.

The HEATSTRIP design incorporates an exclusive, extruded black anodised aluminium profile with a high surface area to radiate heat efficiently and effectively at minimal operating costs.

The special design of this radiation surface ensures rapid, even heat dispersion to provide an ideal comfort heat environment.

In fact, the high performance of the HEATSTRIP means that they can be mounted from 7 feet to over 20 feet from the floor.

Also incorporating a water protection rating of IPX-5, the HEATSTRIP has been specifically engineered for use within undercover outdoor and indoor open areas.

Ideal outdoor undercover applications for the HEATSTRIP would include outdoor smoking or alfresco dining areas, outdoor patios and balconies, or sidewalk cafes.

Ideal indoor applications for the HEATSTRIP would include spot heating in factories, showrooms, animal enclosures and other indoor open areas.

Dry Heat Construction Heaters

Single phase

102,000 BTU electric heater

The Dry Heat Construction Heater can be used in any commercial, industrial or residental setting needing temporary heat.



Model: DH-30

Features/Benefits:

- 102,000 BTU (Three 34,000 BTU stages)
- 208/230 volts
- 2000 cfm
- · All electric single phase
- Portable
- Low maintenance
- · Clean and safe heat no flames, fumes, or venting
- Electric heat does not add moisture
- · Speeds up drying time by providing "dry heat"
- · Completely self contained unit
- Thermostat with a 50° 90°F adjustable range

Specifications:

- 3 60 amp breaker connections required wired directly to electrical panel
- · Air handler is UL and ULC rated
- · 3-phase units available upon request
- Dimensions: 22.5" deep x 25" wide x 52" tall
- · 150 lb. unit weight

Construction:

- · Factory steel casing and powder coated finish
- · Heavy duty angle iron frame and filter frame
- · 2 5" tires and handle allows for easier movement
- · Adjustable steel register
- · Three 60 amp circuit breakers
- · Three 30' portable 6/3SJ electrical cords

HEATING/HVAC COPPER TUBING

Mueller/B&K

Types L and K Copper Tubing - 99% pure copper. Annealed for ready bending. I.D. measurements apply to types L and K tubing.

Type L: Heavy wall for general plumbing and heating purposes.

Sizes stocked in warehouse:

1/4" I.D., 60' coil

3/8" I.D., 60' coil

1/2" I.D., 60' coil

3/4" I.D., 60' coil

Type K: Extra heavy wall for underground service and general plumbing and heating purposes.

Sizes stocked in warehouse:

3/8" I.D., 60' coil

1/2" I.D., 60' coil

3/4" I.D., 60' or 100' coil

1" I.D., 60' coil or 100' coil



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
416605-C	1/4IDX60FT	1/4"idx60 L Copper Tube	0/0/1	7.000	82.99 CL
416614-C	3/8IDX60FT	3/8"idx60 L Copper Tube	0/0/1	11.000	129.99 CL
416623-C	1/2IDX60FT	1/2"idx60 L Copper Tube	0/0/1	15.900	169.99 CL
416632-C	3/4IDX60FT	3/4"idx60 L Copper Tube	0/0/1	25.400	254.99 CL
474355-C	3/8IDX60FT	3/8"idx60 K Coil Tube	0/0/1	15.000	179.99 CL
402230-C	1/2IDX60FT	1/2"idx60 K Copper Tube	0/0/1	19.200	204.99 CL
416641-C	3/4IDX60FT	3/4"idx60 K Copper Tube	0/0/1	35.700	354.99 CL
447706-C	3/4IDX100FT	3/4"idx100 K Coppr Tube	0/0/1	59.600	589.99 CL
434914-C	1"IDX60FT	1"idx60 K Copper Tube	0/0/1	46.800	469.99 CL
439185-C	1"IDX100FT	1"idx100 K Copper Tube	0/0/1	78.000	779.99 CL

Selkirk LLC

Round Gas Vent Pipe - Couplers overlap 1-1/2" when joined. Assembled length is 1-1/2" less than listed lengths.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
441695-D	3RV-18	3" x 18"	1/0/6	1.500	8.49 EA
441276-D	3RV-36	3" x 3'	1/0/6	2.833	13.79 EA
441230-D	3RV-60	3" x 5'	1/0/6	4.667	21.49 EA
441702-D	4RV-18	4" x 18"	1/0/6	1.833	9.99 EA
441285-D	4RV-36	4" x 3'	1/0/6	3.667	16.99 EA
441249-D	4RV-60	4" x 5'	1/0/6	6.167	25.99 EA
441711-D	5RV-18	5" x 18"	1/0/6	2.333	11.49 EA
441294-D	5RV-36	5" x 3'	1/0/6	4.500	19.79 EA
441258-D	5RV-60	5" x 5'	1/0/6	7.250	31.49 EA
441720-D	6RV-18	6" x 18"	1/0/6	2.833	13.49 EA
441301-D	6RV-36	6" x 3'	1/0/6	5.500	23.49 EA
441267-D	6RV-60	6" x 5'	1/0/4	8.750	35.49 EA

Selkirk LLC

Adjustable Round Gas Vent Pipe - 12" length adjusts from 3-1/2" to 10-1/2", 18" length adjusts from 6" to 16".



Product No.	Mfg. No. Description		Order Mult. Weight		Unit Cost
441310-D	3RV-EZAJ12	3" x 12"	1/0/6	1.167	12.79 EA
413364-D	3RV-EZAJ18	3" x 18"	1/0/6	1.667	16.99 EA
441329-D	4RV-EZAJ12	4" x 12"	1/0/6	1.333	14.99 EA
413305-D	4RV-EZAJ18	4" x 18"	1/0/6	2.000	18.49 EA
441338-D	5RV-EZAJ12	5" x 12"	1/0/6	1.667	15.79 EA
413283-D	5RV-EZAJ18	5" x 18"	1/0/6	2.333	19.49 EA
441347-D	6D\/_E7_I10	6" v 12"	1/0/6	2 000	16 /0 E/

NOTE 1: Size refers to the inside diameter of the pipe or fitting. The outside diameter of RV is approximately 1/2" larger. NOTE 2: For venting approved residential, commercial, and industrial gas burning equipment (i.e. gas water heaters, gas furnaces). DO NOT USE on oil or woodburning appliances. Double wall construction consists of an inner aluminum pipe and outer galvanized coated steel pipe. UL listed and tested to withstand 550° F.

1/0/6

2.667

6" x 18"

Mueller/B&K

Refrigerator Tubing - 50' coils. 99% pure copper. Annealed for ready bending. O.D. measurements apply to refrigerator tubing

Sizes stocked in warehouse:



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
416678-C	1/40IDX50FT	1/4"odx50 Refrig Tube	1/10/30	3.700	49.49 CL
416696-C	3/160DX50FT	3/8"odx50 Refrig Tube	1/10/30	6.200	72.99 CL
416703-C	1/2ODX50FT	1/2"odx50 Refrig Tube	1/0/5	8.460	92.99 CL
416712-C	5/8ODX50FT	5/8"odx50 Refrig Tube	1/0/5	11.700	119.99 CL

1/8" O.D.	
3/16" O.D.	
1/4" O.D.	
5/16" O.D.	
3/8" O.D.	
1/2" O.D.	
5/8" O.D.	
3/4" O.D.	

NOTE 1: Due to the fluctuation of the copper market, distributors reserves the right to bill at the prices prevailing on date of shipment. No firm quotes available.

Selkirk LLC

413232-D

90° Adjustable Elbow -

6RV-EZAJ18



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
441392-D	3RV-EL90	Size: 3". A = 5-13/16", B = 4-5/16"	1/0/6	1.000	18.49 EA
441409-D	4RV-EL90	Size: 4". A = 6-3/8", B = 5-1/8"	1/0/6	1.333	22.49 EA
441418-D	5RV-EL90	Size: 5". A = 6-3/8", B = 5-1/8"	1/0/6	1.667	25.99 EA
441427-D	6RV-EL90	Size: 6". A = 6-3/8", B = 5-1/	1/0/6	2.000	31.49 EA

NOTE: 3" elbow - 3 gore; 4", 5", and 6" elbow - 4 gore.

21.49 EA

HEATING/HVAC GAS VENT PIPE

Selkirk LLC

Gas Vent Top - External screen prevents entry of most bird species. Aluminum top and galvanized flashing. Slips

inside of pipe and locks into place with spring clips. Must not be used for woodburning applications.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
441436-D	3RV-RT	Size: 3", A = 6",	1/0/6	.500	10.49 EA
441445-D	4RV-RT	4" Gas Vent Top	1/0/6	.833	10.79 EA
441454-D	5RV-RT	5" Gas Vent Top	1/0/6	1.167	14.49 EA
441463-D	6RV-RT	6" Gas Vent Top	1/0/6	1.667	18.79 EA

B=3-1/4" No. 4RV-RT: Size: 4", $A=8",\ B=4\text{-}1/4"$ No. 5RV-RT: Size: 5", $A=10",\ B=5\text{-}1/4"$ No. 6RV-RT: Size: 6", $A=12",\ B=6\text{-}1/4"$

Selkirk LLC

Gas Vent Wall Thimble - Adjusts from 4-1/8" to 7" to fit thickness of Selkirk LLC wall.





Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
429290-D	3RV-WT	Size: 3", A = 3-5/8",	1/0/6	.844	11.79 EA
429307-D	4RV-WT	4" Wall Thimble	1/0/6	.802	12.99 EA
429316-D	5RV-WT	5" Wall Thimble	1/0/6	.927	14.49 EA
429325-D	6RV-WT	6" Wall Thimble	1/0/6	1.333	17.49 EA

B=10-5/8" No. 4RV-WT: Size: $4",\ A=4\text{-}5/8",\ B=10\text{-}5/8"$ No. 5RV-WT: Size: $5",\ A=5\text{-}5/8",\ B=10\text{-}5/8"$ No. 6RV-WT: Size: $6",\ A=6\text{-}5/8",\ B=10\text{-}5/8"$

Selkirk LLC

Gas Vent Pipe Collar - May be used as firestop for openings in floors, ceilings and walls. C = 2-3/8".



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
441659-D	3RV-GC	Size: 3", A = 3-3/4",	1/0/6	.333	3.29 EA
441668-D	4RV-GC	4" Pipe Collar	1/0/6	.500	3.29 EA
441677-D	5RV-GC	5" Pipe Collar	1/0/6	.333	3.49 EA
441686-D	6RV-GC	6" Pipe Collar	1/0/6	.333	3.49 EA

B = 8-1/2" No. 4RV-GC: Size: 4", A = 4-3/4", B = 9-1/2" No. 5RV-GC: Size: 5", A = 5-3/4", B = 10-1/2" No. 6RV-GC: Size: 6", A = 6-3/4", B = 11-1/2" rote2> NOTE 1: Size refers to the inside diameter of the pipe or fitting. The outside diameter of RV is approximately 1/2" larger. {enote} {note2|NOTE 2: For venting approved residential, commercial, and industrial gas burning equipment (i.e. gas water heaters, gas furnaces). DO NOT USE on oil or woodburning appliances. Double wall construction consists of an inner aluminum pipe and outer galvanized coated steel pipe. UL® listed and tested to withstand 550° F.

Selkirk LLC

Insulated Pipe - Stainless steel outer casing and inner liner.

Double-wall pipe with solid pack insulation. Tested to withstand 2100° F. UL listed. This test helps to prevent product damage or structural hazard during brief periods of this excessive chimney temperature. Normal temperture is 1000° F. Pipe Data: Minimum clearance to combustibles - 2". Stainless steel thickness: Inner lining and outer casing - .012"; couplers - .016". Insulation density - 23 lb./cu. ft.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
413957-D	6T-9	A = 9", B = 6", C = 8"	0/0/2	4.500	48.49 EA
400426-D	6T-18	A = 16-3/4", B = 6", C = 8"	0/0/1	11.000	62.99 EA
400514-D	6T-36	A = 35-5/16", B = 6", C = 8"	0/0/1	18.000	109.99 EA
413886-D	8T-9	A = 9", B = 8", C = 10"	0/0/2	7.500	72.99 EA
402834-D	8T-18	A = 16-3/4", B = 8", C = 10"	0/0/1	15.000	87.99 EA
402380-D	8T-36	A = 35-5/16", B = 8", C = 10"	0/0/1	21.000	164.99 EA

Finish Ceiling Support - With proper framing, both ceiling supports assure at least 2" minimum clearance to combustibles at the support level and can carry up to 50' of

vertical chimney height. Square trim plate. Matte black finish.



	Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
1	400550-D	6T-FSP	A = 6-1/4" O.D., B = 12-1/4" x 12-1/4" framing dimension, C = 14-1/4" square plate dimension	0/0/1	6.000	62.99 EA
	403094-D	8T-FSP	A = 8-1/4" O.D., B = 14-1/4" x 14-1/4" framing dimension, C = 16-1/4" square plate dimension	0/0/1	7.000	74.99 EA

Selkirk LLC

Gas Vent Adjustable Roof Flashing - Flat to 6/12. A = 4". C = 3-1/2" minimum flange dimension.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
441472-D	3RV-AF6	Size: 3", B = 6-5/8"	1/0/6	1.333	6.79 EA
441481-D	4RV-AF6	Size: 4", B = 7-3/4"	1/0/6	1.500	7.79 EA
441490-D	5RV-AF6	Size: 5", B = 8-7/8"	1/0/6	1.833	11.79 EA
441506-D	6RV-AF6	Size: 6", B = 10"	1/0/6	2.000	16.49 EA

NOTE 1: Size refers to the inside diameter of the pipe or fitting. The outside diameter of RV is approximately 1/2" larger. {enote} {note2}**NOTE 2:** For venting approved residential, commercial, and industrial gas burning equipment (i.e. gas water heaters, gas furnaces). DO NOT USE on oil or woodburning appliances. Double wall construction consists of an inner aluminum pipe and outer galvanized coated steel pipe. UL® listed and tested to withstand 550° F.

Selkirk LLC

Gas Vent Storm Collar -



A = 1-9/16".

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
441515-D	3RV-SC	Size: 3", B = 6-5/8"	1/0/6	.167	1.99 EA
441524-D	4RV-SC	Size: 4", B = 7-5/8"	1/0/6	.333	2.29 EA
441533-D	5RV-SC	Size: 5", B = 8-5/8"	1/0/6	.333	4.49 EA
441542-D	6RV-SC	Size: 6", B = 9-5/8"	1/0/6	.333	4.79 EA

Selkirk LLC

Storm Collar - Designed to fit on the round chimney pipe just above the roof flashing. The upper edge should be

waterproofed with plastic sealer to prevent any water from leaking between the storm collar and chimney pipe. Part is tightened with screws or tabs after proper positioning. B = 5-1/2".



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
401023-D	6T-SC	A = 8"	1/0/4	.500	8.79 EA
403600-D	8T-SC	A = 10"	1/0/4	.750	11.49 EA

Selkirk LLC

Dripless Smoke Pipe Adapter - Used to connect either model DS

smoke pipe or single wall stove pipe to SSII type HT insulated chimney pipe. The part is designed to slip inside single wall stove pipe to contain any creosote dripping down the chimney on the inside of the pipe system. There are 2 dripless smoke adapters:

(1) (DSA)-without coupler.

For use in retrofit installations, this part can be installed from below with a finish support package and secured with screws.

(2) (DSAC)-with coupler.

For use in new installations, this part can be installed by twist-locking the coupler on the DSAC into the first section of Model SSII type HT chimney pipe.


Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
405500-D	6T-DSA	A = 5.94", B = 6.21",	1/0/4	1.030	37.99 EA
405172-D	8T-DSA	Dripless Adapter	1/0/4	1.030	42.99 EA
410551-D	6T-DSAC	Dripless Adapter	1/0/4	2.750	47.49 EA
410543-D	8T-DSAC	Dripless Adapter	1/0/4	3.500	52.99 EA

 $C=15.75",\,D=1.63"$ No. 8T-DSA: $A=7.94",\,B=8.21",\,C=15.75",\,D=1.63"$ No. 6T-DSAC: $A=5.94",\,B=15.75"$ No. 8T-DSAC: $A=7.94",\,B=15.75"$

Selkirk LLC

3-Piece Chimney Kit - Contains 1 round top, 1 storm collar, and 1 roof flashing (either 6T-AF6 or 8T-AF6). For use with

SSII Type HT chimneys.



No. No. Description Mult. Weight	Cost
405074-D 6T-RTK 6" 0/0/1 7.000	114.99 EA
405118-D 8T-RTK 8" 0/0/1 10.000	169.99 EA

NOTE 1: SSII type HT chimney pipe and accessories for venting residential heating appliances burning natural and LP gas, No. 2 oil, and wood. It has been specifically designed for today's modern, high-efficiency *airtight* wood stoves, or as they are termed; solid fuel wood burning fireplaces. It is also suitable for wood burning heaters and for combination fuel central heating furnaces.

Selkirk LLC

Pellet Stove Pipe - 3" Type L insulated pipe for pellet stove applications. Pipe and fittings overlap 1-1/2" when


jointed. Assembled length is 1-1/2" less than listed lengths.



	Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
Ų.	468800-D	3VP-6	3" x 6", galvanized	1/0/6	.667	13.79 EA
_	405884-D	3VP-12	3" x 12", galvanized	1/0/6	1.333	17.49 EA
	405876-D	3VP-24	3" x 24', galvanized	1/0/6	1.833	22.49 EA
	405833-D	3VP-36B	3" x 36", black	1/0/6	4.000	34.99 EA
	467626-D	3VP-36L	3" x 36", galvanized	1/0/6	4.000	31.49 EA
	468819-D	3VP-60B	3" x 60", black	1/0/6	5.500	52.99 EA

Selkirk LLC

Adjustable Length Pellet Stove Pipe - Maximum installed 10-1/2" pellet stove pipe. Adjustable to 8" shorter. 3" I.D. x 12" overall length.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
443602-D	3VP-EZAJ12B	Black	1/0/6	8.000	26.99 EA
467618-D	3VPEZAS12	Galvanized	1/0/6	1.333	22.99 EA

Selkirk LLC

Pellet Stove Pipe Elbow - 3° , 45° elbow. Type L insulated pipe for pellet stove applications. A = $3-7/16^{\circ}$.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
443620-D	3VP-45ELB	Black	1/0/6	8.000	34.49 EA
406090-D	3VP-45EL	Galvanized	1/0/6	.833	29.99 EA

HEATING/HVAC GAS VENT PIPE

479683-D

GV0431

Selkirk LLC

Pellet Stove Pipe Elbow - 90° 3" elbow. Type L insulated pipe for pellet stove applications. 3" diameter. Size: A = 5-13/16.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
405914-D	3VP-90EL	Galvanized	1/0/6	1.167	37.49 EA
406031-D	3VP-90ELB	Black	1/0/6	1.167	45.49 EA

Selkirk LLC

Pellet Stove Pipe Connector - 3" pipe connector. Type L insulated pipe for pellet stove applications. 3".



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
443639-D	3VP-PCB	Black	1/0/6	3.000	17.99 EA
406406-D	3VP-PC	Galvanized	1/0/6	.500	14.79 EA

Selkirk LLC

Pellet Stove Pipe Storm Collar - 3" storm collar. Type L insulated pipe for pellet stove applications. Size: A = 3-5/8".



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
406880-D	3VP-SC	Pellet Stov Storm Collar	1/0/6	.167	2.99 EA

Selkirk LLC

Through The Wall Pellet Pipe Kit - 3" pellet vent through the wall kit includes 1 pipe adaptor, 1 wall thimble, 1 tee with cleanout, 5-1' pipe lengths, 1 wall strap, one 90°

elbow, and 1 horizontal cap. NOTE: Not compatible with other

manufacturers pipe.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
446119-B	283870	3" Wall Pellet Pipe Kit	0/0/1	14.000	204.99 EA

Imperial Mfg Group

Galvanized Furnace Pipe - For gas heating, ventilation, and air conditioning only. Not for use with solid fuel appliances. Outside surface smooth. Snap-lock.

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
427268-D	GV0345	3" x 24", 28-gauge	1/0/10	1.200	3.49 EA
406732-D	GV0346	3" x 24", 30-gauge	1/0/10	.800	2.99 EA
479713-D	GV0352-A	3" x 60", 30-gauge	1/0/5	2.500	7.49 EA
425494-D	GV0355	4" x 24", 26-gauge	1/0/10	2.000	4.79 EA
427276-D	GV0356	4" x 24", 28-gauge	1/0/10	1.400	4.49 EA
406741-D	GV0357	4" x 24", 30-gauge	1/0/10	1.200	3.29 EA
433314-D	GV0362-A	4" x 60", 30-gauge	1/0/10	2.800	8.29 EA
408400-D	GV0367	5" x 24", 26-gauge	1/0/10	2.500	5.49 EA
427284-D	GV1308	5" x 24", 28-gauge	1/0/10	2.100	6.49 EA
407410-D	GV0368	5" x 24", 30-gauge	1/0/10	2.100	3.79 EA
479705-D	GV0374-A	5" x 60", 30-gauge	1/0/10	3.100	9.49 EA
492310-D	GV1753	6" x 12", 26-gauge	1/0/10	.865	3.49 EA
408696-D	GV0379	6" x 24", 24-gauge	1/0/10	3.000	6.99 EA
408614-D	GV0380	6" x 24", 26-gauge	1/0/10	2.800	4.99 EA
	GV1254	6" x 24", 28-gauge	1/0/10	2.400	5.49 EA
407679-D	GV0381	6" x 24", 30-gauge	1/0/10	1.700	3.99 EA
420413-D	GV0388-A	6" x 60", 30-gauge	1/0/10	3.700	9.29 EA
408703-D	GV0393	7" x 24", 24-gauge	1/0/10	3.400	9.49 EA
408687-D	GV0394	7" x 24", 26-gauge	1/0/10	2.900	7.29 EA
479667-D	GV0395	7" x 24", 28-gauge	1/0/10	2.800	6.29 EA
407713-D	GV1335	7" x 24", 30-gauge	1/0/10	2.400	5.99 EA
439258-D	GV0401	7" x 60", 28-gauge	1/0/5	7.200	14.49 EA
408712-D	GV0405	8" x 24", 24-gauge	1/0/10	4.200	8.79 EA
425508-D	GV0406	8" x 24", 26-gauge	1/0/10	3.800	7.99 EA
479659-D	GV0407	8" x 24", 28-gauge	1/0/10	3.200	6.99 EA
408393-D	GV1336	8" x 24", 30-gauge	1/0/10	3.000	6.49 EA
433322-D	GV0412	8" x 60", 28-gauge	1/0/5	7.700	18.49 EA
479675-D	GV0415	9" x 24", 28-gauge	1/0/10	3.400	8.79 EA
479640-D	GV0416	9" x 30", 24-gauge	1/0/10	4.300	11.79 EA
479691-D	GV0421	10" x 24", 24-gauge	1/0/10	5.030	11.49 EA
439312-D	GV0422	10" x 24", 30-gauge	1/0/10	4.000	9.79 EA
479683-D	GV0/31	12" v 30" 24-gauge	1/0/10	5 600	12 00 FA

12" x 30", 24-gauge

1/0/10

5.600

12.99 EA


YOUR Single Source Supplier!

HEATING/HVAC REGISTER BOOT

Imperial Mfg Group

Galvanized Adjustable Elbow - 90° adjustable rounded double seams permit each section to turn freely without any chance of

becoming disconnected. Elbows can be adjusted to



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
427306-D	GV0281-C	3" diameter, 28-gauge	1/0/8	.400	2.99 EA
408945-D	GV0282-C	3" diameter, 30-gauge	1/0/8	.300	2.79 EA
425516-D	GV0284-C	4" diameter, 26-gauge	1/0/8	.599	3.49 EA
427314-D	GV0285-C	4" diameter, 28-gauge	1/0/8	.500	2.99 EA
408954-D	GV0286-C	4" diameter, 30-gauge	1/0/8	.400	2.79 EA
414153-D	GV0289-C	5" diameter, 26-gauge	1/0/8	.799	4.29 EA
427322-D	GV0290-C	5" diameter, 28-gauge	1/0/8	.599	3.49 EA
408981-D	GV0291-C	5" diameter, 30-gauge	1/0/8	.500	2.99 EA
415811-D	GV0293-C	6" diameter, 24-gauge	1/0/8	1.598	5.49 EA
415116-D	GV0294-C	6" diameter, 26-gauge	1/0/8	1.199	4.49 EA
427330-D	GV0295-C	6" diameter, 28-gauge	1/0/8	1.099	3.99 EA
409631-D	GV0296-C	6" diameter, 30-gauge	1/0/8	.800	3.29 EA
415820-D	GV0298-C	7" diameter, 24-gauge	1/0/8	1.998	7.49 EA
415429-D	GV0299-C	7" diameter, 26-gauge	1/0/8	1.598	6.29 EA
479616-D	GV0300-C	7" diameter, 28-gauge	1/0/8	1.515	5.79 EA
412333-D	GV1329-C	7" diameter, 30-gauge	1/0/8	1.399	4.99 EA
416295-D	GV0301-C	8" diameter, 24-gauge	1/0/8	2.398	9.29 EA
415697-D	GV0302-C	8" diameter, 26-gauge	1/0/8	1.798	7.49 EA
479594-D	GV0303-C	8" diameter, 28-gauge	1/0/8	1.598	6.79 EA
412921-D	GV1330-C	8" diameter, 30-gauge	1/0/8	1.400	5.99 EA
479586-D	GV0304-C	9" diameter, 24-gauge	1/0/8	2.825	11.49 EA
479608-D	GV0306-C	9" diameter, 28-gauge	1/0/8	2.525	8.29 EA
479632-D	GV0307	10" diameter, 24-gauge	1/0/8	3.100	14.49 EA
439304-D	GV0309	10" diameter, 28-gauge	1/0/8	2.400	13.79 EA
479624-D	GV0310	12" diameter, 24-gauge	1/0/8	3.788	16.99 EA

NOTE: Galvanized pipe to be used for gas heating, ventilation, and air conditioning only. Not to be used for solid fuel venting.

Imperial Mfg Group

Galvanized Increaser - For single wall pipe. Large end is crimped.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
425680-D	GV1418	3" x 4", 24-gauge	1/0/10	.600	8.49 EA
411263-D	GV1419	4" x 5", 24-gauge	1/0/10	.800	8.79 EA
479799-D	GV0766-A	4" x 5", 30-gauge	1/0/10	.350	5.99 EA
411281-D	GV1420	4" x 6", 24-gauge	1/0/12	.800	9.29 EA
479780-D	GV0767-A	4" x 6", 30-gauge	1/0/12	.800	6.79 EA
411325-D	GV1358	5" x 6", 24-gauge	1/0/12	1.000	9.29 EA
479802-D	GV0769-A	5" x 6", 30-gauge	1/0/12	.400	6.49 EA
411334-D	GV1359	6" x 7", 24-gauge	1/0/12	1.000	9.79 EA
411496-D	GV1360	6" x 8", 24-gauge	1/0/10	1.000	9.99 EA
411682-D	GV1361	7" x 8" 24-gauge	1/0/12	1 000	10 49 FA

Imperial Mfg Group

Galvanized Reducer - For single wall pipe. Small end is crimped.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
425672-D	GV1415	4" x 3", 24-gauge	1/0/10	.600	8.79 EA
479721-D	GV0808-A	4" x 3", 28-gauge	1/0/10	.300	5.49 EA
411691-D	GV1416	5" x 4", 24-gauge	1/0/10	.800	8.79 EA
479772-D	GV0810-A	5" x 4", 28-gauge	1/0/10	.300	7.29 EA
411762-D	GV1417	6" x 4", 24-gauge	1/0/12	.792	8.79 EA
411771-D	GV1349	6" x 5", 24-gauge	1/0/12	1.000	9.29 EA
411922-D	GV1350	7" x 6", 24-gauge	1/0/12	1.000	9.79 EA
479748-D	GV0816	7" x 6", 28-gauge	1/0/12	.800	6.79 EA
412182-D	GV1351	8" x 6", 24-gauge	1/0/10	1.000	9.79 EA
479764-D	GV0821	8" x 6", 28-gauge	1/0/10	.850	6.79 EA
412324-D	GV1352	8" x 7", 24-gauge	1/0/12	1.000	10.49 EA
479756-D	GV0822	8" x 7", 28-gauge	1/0/12	.933	6.79 EA
439266-D	GV1353	10" x 8", 24-gauge	1/0/10	1.000	13.79 EA

NOTE 1: Galvanized pipe to be used for gas heating, ventilation and air conditioning only. Not to be used for solid fuel venting. {enote} {note2}NOTE 2: For Galvanized increasers and reducers, the crimped end should always be on top to allow exhaust to flow into the next piece of pipe. Exhaust will not be able to escape from the openings at the crimped end.

Imperial Mfg Group

Galvanized Register Boot - Universal. 30-gauge.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
425532-D	GV0698-C	2-1/4" x 10" x 6"	1/0/6	.600	6.29 EA
439993-D	GV0699-C	2-1/4" x 12" x 6"	1/0/6	.667	6.79 EA
425842-D	GV0702-C	3-1/4" x 10" x 6"	1/0/6	.700	8.79 EA
439939-D	GV0704-C	4" x 10" x 6"	1/0/6	.700	6.49 EA
425540-D	GV0705-C	4" x 12" x 6"	1/0/6	.900	7.29 EA
439895-D	GV0711	4" x 12" x 7"	1/0/12	1.000	7.29 EA
439831-D	GV0707	6" x 10" x 6"	1/0/8	.800	9.79 EA
452939-D	GV0708	6" x 12" x 6"	1/0/12	1.000	9.29 EA

NOTE 1: Galvanized pipe to be used for gas heating, ventilation, and air conditioning only. Not to be used for solid fuel venting.

Imperial Mfg Group

Galvanized Register Boot - 90° angle.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
479969-D	GV0610	2-1/4" x 12" x 5", 30-gauge	1/0/15	.627	7.49 EA
425559-D	GV0620-C	2-1/4" x 10" x 6", 30-gauge	1/0/6	.800	6.79 EA
440204-D	GV0621-C	2-1/4" x 12" x 6", 30-gauge	1/0/6	.900	7.49 EA
425869-D	GV0624-C	3-1/4" x 10" x 6", 30-gauge	1/0/6	.800	6.99 EA
439822-D	GV0626-C	4" x 10" x 6", 30-gauge	1/0/6	1.000	6.99 EA
440213-D	GV0627-C	4" x 12" x 6", 30-gauge	1/0/6	1.000	7.49 EA
452920-D	GV0634	4" x 12" x 7", 28-gauge	1/0/10	1.000	10.49 EA

ELBOWS HEATING/HVAC

Imperial Mfg Group

Galvanized Tee - Full flow.




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
479896-D	GV0912	3", 26-gauge	1/0/12	.525	12.79 EA
479918-D	GV0883	4", 26-gauge	1/0/15	.833	13.99 EA
479926-D	GV0887	5", 26-gauge	1/0/12	.917	15.49 EA
425621-D	GV0892	6", 26-gauge	1/0/10	1.200	12.99 EA
425656-D	GV0893-A	6", 30-gauge	1/0/10	1.000	9.79 EA
479934-D	GV0895	7", 26-gauge	1/0/5	1.800	17.79 EA
425648-D	GV0899	8", 26-gauge	1/0/5	2.200	16.49 EA
425605-D	GV0900	8", 30-gauge	1/0/5	2.000	11.99 EA

NOTE 1: Galvanized pipe to be used for gas heating, ventilation, and air conditioning only. Not to be used for solid fuel venting.

Imperial Mfg Group

Top Take-Off - Galvanized. 30-gauge. Nonadjustable. Rectangular/square-to-round.



Product No.	Mfg. No.	Description	Order Mult. Weight	Unit Cost
425737-D	GV0970-C	Pipe size: 6"	1/0/6 .600	7.79 EA
453161-D	GV0972	Pipe size: 8"	1/0/10 .820	10.79 EA

Imperial Mfg Group

Side Take-Off - Galvanized. 30-gauge. Rectangular/square-to-round. Pipe size: 6".



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
452912-D	GV0959-C	6" Side Take-off	1/0/6	.600	8.99 EA

Imperial Mfg Group

Flat Elbow - Galvanized. 30-gauge. 45° angle. 3-1/4" x 10".



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
452637-D	GV0048-C	3-1/4x10 45d Flat Elbow	1/0/6	.500	8.99 EA

Imperial Mfg Group

Flat Elbow - Galvanized. 30-gauge. 90° angle.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
425818-D	GV1307-C	2-1/4" x 12"	1/0/6	.800	8.49 EA
425826-D	GV0060-C	3-1/4" x 10"	1/0/6	.800	9.49 EA
453110-D	GV1147	3-1/4" x 12"	1/0/12	1.000	10.79 EA

Imperial Mfg Group

Side Elbow - Galvanized. 30-gauge. 45° angle.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
452645-D	GV0084-A	8" x 12"	1/0/5	2.000	17.49 EA
452653-D	GV0086-A	8" x 16"	1/0/5	2.600	22.49 EA

Imperial Mfg Group

Side Elbow - Galvanized. 30-gauge. 90° angle.



	Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
٦	453129-D	GV0098-A	8x12 90d Side Elbow	1/0/5	2.600	19.49 EA

Imperial Mfg Group

Stack Head - Galvanized. 30-gauge. Short throat. 3" rise.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
425893-D	GV1309	2-1/4" x 12" x 6" x 12"	1/0/12	1.200	7.99 EA
425907-D	GV1157-C	3-1/4" x 10" x 6" x 10"	1/0/6	1.200	7.79 EA

NOTE 1: Galvanized pipe to be used for gas heating, ventilation, and air conditioning only. Not to be used for solid fuel venting.

Imperial Mfg Group

Ceiling Boot - Galvanized. 30-gauge. With wings.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
425915-D	GV1311	6" x 10" x 6".	1/0/8	1.200	10.79 EA
479950-D	GV1312	6" x 12" x 6"	1/0/6	1.400	10.49 EA

Imperial Mfg Group

Trunk Duct - Galvanized. Snap-lock. 2-piece item. Price per 1/2 piece.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
452858-D	GV1087	8" x 8" x 60", 28-gauge	0/0/12	5.200	14.49 EA
452777-D	GV0234	8" x 10" x 48", 30-gauge	0/0/12	3.900	5.99 EA
452866-D	GV1103	8" x 10" x 60", 28-gauge	0/0/12	5.700	18.49 EA
452769-D	GV0235	8" x 12" x 48", 30-gauge	0/0/12	4.400	6.29 EA
425931-D	GV1114	8" x 12" x 60", 28-gauge	0/0/12	6.300	15.49 EA
452750-D	GV0236	8" x 14" x 48", 30-gauge	0/0/12	5.100	6.79 EA
425958-D	GV1136	8" x 14" x 60", 28-gauge	0/0/12	6.900	17.49 EA
452742-D	GV0237	8" x 16" x 48", 30 gauge	0/0/12	5.500	9.79 EA
425966-D	GV1156	8" x 16" x 60", 26-gauge	0/0/12	9.100	19.49 EA
452874-D	GV1027	8" x 18" x 60", 26-gauge	0/0/12	9.800	21.99 EA
452734-D	GV0239	8" x 20" x 48", 28-gauge	0/0/12	6.900	9.99 EA
452718-D	GV0241	8" x 24" x 48", 28-gauge	0/0/12	7.900	11.49 EA
452890-D	GV1080	8" x 24" x 60", 28-gauge	0/0/12	11.900	31.49 EA

Hillman Fastner Corp

Solid Wire - Galvanized steel. Resists rust. Refill for Display No. 14000.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
402257-D	122339	12-gauge, 100' long	1/0/6	2.333	6.29 CD
402540-D	122065	14-gauge, 100' long	1/0/6	2.333	4.49 CD
401137-D	122060	16-gauge, 200' long	1/0/6	2.333	6.79 CD

Hillman Fastner Corp

Stranded Wire - Weather proof. Refill for display No. 14000.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
403466-D	122070	6 strand/20-gauge galvanized steel, 100' long	1/0/6	2.333	5.49 CD
401145-D	122061	Blue plastic-coated stranded galvanized steel, 50' long	1/0/6	1.167	5.29 CD

Intertape Polymer Group

Duct Tape - Silver utility cloth tape. Self-adhesive, waterproof, exceptionally strong. For use on ducts, indoors and outdoors, for wrapping insulated pipes, closing seams, and sealing joints. Use to mend and repair. 2" x 60 yd.



Product	Mfg.		Order	Unit	
No.	No. Description		Mult.	Cost	
404592-D	9600-SL	2"x60yd Silver Duct Tape	1/0/24	1.850	8.49 EA

Intertape Polymer Group

Duct Tape - Poly-coated cloth tape. Features an excellent adhesive. Has good tensile strength. Water and tear resistant. Made with DuPont Dacron®. 1.9" x 60 vd.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
401811-D	6900	1.9"x60yd Slvr Duct Tape	1/0/24	1.250	4.29 EA

Intertape Polymer Group

application. 2" x 45 yd.

General-Purpose Silver Duct Tape - Poly-coated cloth backed with a very aggressive adhesive that bonds to almost any surface. Good conformability and also water and tear-resistant. Made with DuPont Dacron® for added strength and durability, plus provides a smooth, even tear during

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
462403-D	6701	2"x45yd Silver Duct Tape	1/0/20	1.050	5.29 EA

Duct Tapes, Cloth Tapes

3M™ Duct Tape 3900

Polyethylene coated cloth with rubber adhesive. Economy grade duct tape. A good choice for general maintenance, wrapping, sealing and protecting.



UPC Number	Size	Color	Case Qty	Units
00-021200-49833-6	48mmx54.8m	Black	24	RL
00-021200-49832-9	48mmx54.8m	Blue	24	RL
00-021200-49831-2	48mmx54.8m	Olive	24	RL
00-021200-49830-5	48mmx54.8m	Red	24	RL
00-051131-06976-3	48mmx54.8m	Silver	24	RL
00-021200-49829-9	48mmx54.8m	White	24	RL
00-021200-49828-2	48mmx54.8m	Yellow	24	RL

3M™ Duct Tape 3939

Economy grade duct tape. Polyethylene coated cloth backing with rubber adhesive. High tack, conformability, strength and easy tear make 3939 ideal for many duct and moisture sealing, holding, protecting and bundling applications.



UPC Number	Size	Color	Case Qty	Units
00-051131-06975-6	48mmx54.8m	Silver	24	RL
00-021200-85562-7	72mmx54.8m	Silver	12	RL

3M™ Duct Tape 6969

General purpose grade duct tape. Polyethylene coated cloth backing with rubber adhesive. Ideal for color coding, sealing, holding, protecting from moisture, temporary repairs and general maintenance activities.



UPC Number	Size	Color	Case Qty	Units
00-021200-22773-8	48mmx54.8m	Black	24	RL
00-021200-22780-6	48mmx54.8m	Olive Drab	24	RL
00-051131-06969-5	48mmx54.8m	Silver	24	RL
00-021200-85635-8	72mmx54.8m	Silver	12	RL

Duct Tapes, Cloth Tapes, cont'd

3M™ Performance Plus Duct Tape 8979

8979 is designed for both permanent and temporary applications both indoors and outdoors. 8979 provides clean removal with little or no adhesive residue from most opaque surfaces up to 6 months after application. It offers sunlight UV resistance for up to 1-Year with-



out the backing deteriorating or delaminating. Typical physical and performance characteristics include; thickness: 13 mils, adhesion to steel: 55 oz. in width, tensile strength: 36 lbs. in width, elongation at break: 21%, clean removal indoors and outdoors for 6 months; temperature use range: Up to 200°F (93°C).

UPC Number	Size	Color	Case Qty	Units
00-048011-53922-5	24mmx54.8m	Slate Blue	48	RL
00-021200-56468-0	48mmx54.8mm	Slate Blue	24	RL
00-048011-53851-8	48mmx22.8m	Slate Blue	12	RL
00-021200-56469-7	72mmx54.8mm	Slate Blue	12	RL
00-048011-53918-8	48mmx54.8m	Black	24	RL
00-021200-56470-3	96mmx54.8mm	Slate Blue	12	RL
00-048011-53916-4	48mmx54.8m	Olive	24	RL

Scotch® Professional HVAC

This tape meets stringent UL standards and is for use on ventilation ducts and pipes. Extremely dense cloth and special adhesives create unique sealing properties to protect against moisture or air leakage.



UPC Number	ID	Size	Case Qty	Units
00-051131-50253-6	132	1.88"x20yds	24	RL
00-051131-50254-3	133	1.88"x60yds	24	RL

Masking Products, Masking Papers

3M™ Hand-Masker™ Film Blade

Blade accessory for $3M^{\text{TM}}$ Hand Masker M3000. Durable, sharp, stainless-steel blade with plastic blade guard. Also available in 6'' size.



UPC Number	Size	Case Qty	Units	
00 051131 06903 5	12"	6	EA	

3M Supply House

Intertape Polymer Group

Duct Tape - Colored DUCTape™ all-purpose duct tape has an excellent adhesive system. Water-resistant and tear-resistant. Used for color coding, color coordinating, and a variety of repair projects. 1.87" x 60 yd.

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
401755-D	20C-BL2	Blue	1/0/24	1.583	7.99 EA
401791-D	20C-BK2	Black	1/0/24	1.583	7.99 EA
401844-D	20C-BR2	Brown	1/0/24	1.583	7.99 EA
401924-D	20C-OD2	Olive drab	1/0/24	1.583	7.99 EA
401764-D	20C-R2	Red	1/0/24	1.583	7.99 EA
401899-D	20CYL2	Yellow	1/0/24	1.579	7.99 EA
405213-D	20C-W2	White	1/0/24	1.583	7.99 EA

Intertape Polymer Group

x 60 yd.

Contractor Grade Duct Tape - Anchor® 36 heavy-duty duct tape is an all-purpose duct tape with an agressive adhesive system that bonds to almost any surface. Excellent conformity for working in tight spaces. Water and tear resistant. UL723 rated, meets HUD and B.O.C.A. codes. 48mm

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
497921-D	9/127	60vd Anchor26 Duct Tano	1/0/24	1 700	9 10 EA

Intertape Polymer Group

Contractor Grade Duct Tape - Anchor® 45 extra heavy-duty duct tape is designed to meet the requirements of the general contractor. This tape has an aggressive, wide

temperature range adhesive system, recommended for use where high adhesion, nonslip properties are required. Hangs and tears straight. Water and tear resistant, UL723 rated, meets HUD and B.O.C.A. codes. 48mm x 60 yd.

	•			7	
Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
487813-D	84138	60yd Anchor45 Duct Tape	1/0/24	1.829	9.99 EA

Intertape Polymer Group

Duct Tape - General-purpose. 2 times the standard roll width. Very aggressive adhesive, bonds to most surfaces. Water and tear-resistant. Silver. 3.74" x 60 yd. 96mm x 54.8m.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
497347-B	84398	4"x60yd Silver Duct Tape	1/0/8	3.167	10.49 EA

Intertape Polymer Group

Duct Tape - General-purpose. Utility grade. Very aggressive adhesive - bonds to most surfaces. Wear and tear-resistant. 3 pack of 1.87" x 60 yd. 48mm x 54.86m. Silver.

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
497355-C	84397	3pk 1.87"x60vd Duct Tape	1/0/8	1.460	12.79 PK

3M

Heavy-Duty Duct Tape - All-weather duct tape. Specifically designed to resist harsh outdoor conditions from hot sun to

cold rain. Stays pliable so repairs stay put. Lasts 3 times longer than other Scotch® and major brand heavy-duty duct tapes. Conforms for a tight repair. Tears easily lengthwise and crosswise. Resists UV rays, cold, heat, and moisture. Holds strong in cold and heat (0° F. to 150° F./-18° C. to




-66° C.). Can be applied between 40° F. to 120° F./4° C. to 49° C. Meets UL 723, HUD, and BOCA codes.

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
412813-C	2245-A	2"x45yd H/duty Duct Tape	1/0/12	1.100	8.29 RL

3M

Colored Cloth Tape - Scotch™ brand. Made with a durable poly-cotton cloth construction. High-tack adhesive provides good bonding. Multiple household uses. 2"

x 60 vd



Intertape Polymer Group

Gaffers Tape - Premium grade 11.5 mil. all-weather gaffers tape has a high thread count with a vinyl impregnated cotton cloth.

Matte finish makes it great for stage and theatrical projects. Designed to be used temproarily to hold down cables, wire, or anything you need to stabilize. Will not leave tape residue on surfaces. 1.87" x 60 yd. shrink wrapped roll with top label.

wiappedi	viapped foil with top label:										
Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost						
430992-D	5638	Black	1/0/24	2.083	21.49 EA						
431027-D	5639	Silver	1/0/24	2.083	21.49 EA						

HEATING/HVAC DUCT TAPE

Intertape Polymer Group

the UL181 and SMACNA AFTS 101-73 performance

standards. Used to tape and seal joints and seams on fibrous duct boards as well as air conditioning and heating duct systems. 2.5" x 60 yd.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
401933-D	5008	2.5"x60yd Alum Foil Tape	1/0/16	2.250	21.49 EA

ITP Limited

Pipe Insulation Tundra® Plus - Closed cell polyolefin tubing with excellent thermal insulating capabilities. Fire retardant. Will not rot or disintegrate. 3/8" wall thickness. Temperature range -90° to 210°. Eliminates freeze during the winter and

reduces condensation in the summer. Use over cold and hot water systems, refrigeration and air conditioning lines, and a broad range of other insulating applications. Packed four 3' pieces per package. Grey.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
400211-D	PR38138UA	1-1/4" copper, 1" iron, R value 2.6	1/0/10	.700	4.49 PK
436246-D	PR38058UA	1/2" copper, 3/8" iron, R value 2.4	1/0/24	.292	2.79 PK
436371-D	PR38078UA	3/4" copper, 1/2" iron, R value 2.2	1/0/18	.389	3.29 PK
436406-D	PR38118UA	1" copper, 3/4" iron, R value 2.2	1/0/14	.500	3.99 PK

ITP Limited

Pipe Insulation Tundra® Plus - Closed cell polyolefin tubing with

excellent thermal insulating capabilities. Fire retardant. Will not rot or disintegrate. 5/8" wall thickness. Partially slit, self-sealing, highly flexible and easy-to-apply. Eliminates freeze during the winter, reduces condensation in the summer. Temperature range -90° to 210° F. Use over cold and hot water systems, refrigeration and air conditioning lines and a broad range of other insulating applications. Packed four 3' pieces per package. Tan.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
436193-D	PR58058TA	1/2" copper, 3/8" iron, R value 4.9	1/0/16	.375	4.99 PK
436200-D	PR58078TA	3/4" copper, 1/2" iron, R value 4.3	1/0/12	.500	5.79 PK
436219-D	PR58118TA	3/4" copper, 3/4" iron, R value 3.7	1/0/10	.643	7.29 PK

ITP Limited

Aluminum Foil Tape - UL181AP tape. A printed foil tape that meets Pipe Insulation Tundra® Plus - Bulk packed in 6' lengths. Closed

cell polyolefin with excellent thermal insulating capabilities. Fire retardant. Will not rot or disintegrate. 3/8" wall thickness. Temperature range -90° F. to 210° F. Eliminates freeze during the winter and reduces condensation in the summer. Highly flexible and easy-to-apply. Use over cold and hot water systems, refrigeration and air conditioning lines, and a broad range of other insulating applications. Grey.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
400386-D	PR38138UW	1-1/4" copper, 1" iron, R value 2.6, 32-pieces per carton	0/0/32	.281	1.79 EA
436451-E	PR38058UW	1/2" copper, 3/8" iron, R value 2.4, 70-pieces per carton	0/0/70	.229	1.29 EA
436558-D	PR38078UW	3/4 copper, 1/2" iron, R value 2.2, 50-pieces per carton	0/0/50	.320	1.29 EA
436567-D	PR38118UW	1" copper, 3/4" iron, R value 2.2, 40-pieces per carton	0/0/40	.400	1.79 EA

ITP Limited

Pipe Insulation Tundra® Seal Plus - Bulk packed in 6' lengths. Closed cell polyolefin with excellent thermal insulating capabilities.

Fire retardant. Will not rot or disintegrate. 5/8" wall thickness. Temperature range -90° F. to 210° F. Partially slit, self-sealing, highly flexible and easy-to-apply. Elimates freeze in the winter and reduces condensation in the summer. Use over cold and hot water systems.

refrigeration and air conditioning lines, and a broad range of other insulating applications. Tan.

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
402699-D	PR58058TW	1/2" copper, 3/8" iron, R value 4.9, 40-pieces per carton	0/0/40	.320	1.99 EA
402702-D	PR58078TW	3/4" copper, 1/2" iron, R value 4.3, 35-pieces per carton	0/0/35	.400	2.29 EA
402710-D	PR58118TW	1" copper, 3/4" iron, R value 3.7, 25-pieces per carton	0/0/25	.533	2.79 EA

Thermwell Prods. Co.

Pipe Wrap Insulation Tape - Frost King®. Self-adhesive vinyl foam and aluminum foil insulation tape is a simple, 1-step way

to insulate both hot and cold pipes. On hot pipes, it helps stop wasteful heat loss. On cold pipes, it stops sweating and dripping. It also dampens sound and vibrations. Fire retardant. R-value 1.6. Roll size: 2" W. x 1/8" T. x 15' L.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
420280-D	FV15H	2"x15 Pipe Insul Tape	1/0/12	.500	4.49 RL

Thermwell Prods. Co.

Foil and Fiberglass Duct Insulation - FrostKing®. For use on heating and air conditioning ducts. Prevents heat loss and sweating on pipes. To install simply wire or tape in place.
R-value: 4.3. Installed R-value: 3. 12" W. x





Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
407580-D	SP55	12"x15 Foil Duct Wrap	1/0/12	2.000	11.49 RL

Thermwell Prods. Co.

Air Conditioner Vinyl Side Panels - For replacement of old, cracked, or torn air conditioner side panels. Kit comes complete with 2 flexible vinyl side panels and 4 mounting tracks with pressure sensitive adhesive. Side panels expand to fit openings 21" H. x 12" W. or can be trimmed to fit most window units. Meets or exceeds OEM specifications. 1 year limited warranty. Color: Tan.

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
275018-C	AC18H	21hx12w Vinyl Ac Panels	1/0/12	1.167	14.79 EA

Thermwell Prods. Co.

A/C Safe® Air Conditioner Foam Weather Seal - Reduces energy loss, window vibrations, and outside sounds. Durable and flexible nontoxic foam plastic will not dry out or crumble. Highly resistant to sunlight, moisture, and temperature extremes. Best with vinyl or white painted window frames. Foam seal wedges between sash. 1/2" T. x 1-1/2" W. x 40" L. White.

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
275034-C	AC41W	Ac Foam Weather Seal	1/0/24	.125	4.79 EA

Thermwell Prods. Co.

Fin Tool - Professional quality maintenance fin tool for straightening

condenser and evaporator fins on central and window air conditioning units. Fixed steel tines loosen and clean accumulated scum and dust off air conditioner fins. Fits virtually any fin size and style. Helps to promote maximum cooling efficiency. Tubular aluminum body.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
275042-C	AC90	Window Ac Fin Tool	1/0/12	.167	8.99 EA

Thermwell Prods. Co.

Pan Tablets - For air conditioners, dehumidifiers, humidifiers, and refrigerators. Cleans contaminants and prevents odors in drain pans. Prevents overflows by eliminating plugged drain pans and tubes. Completely soluble and deposit-free. Nontoxic and noncorrosive formula. 6 tablets per card.

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
275050-E	AC91	Dbl Strength Pan Tablets	1/0/36	.056	4.99 EA

Thermwell Prods. Co.

Air Conditioner Coil Foaming Cleaner - Cleans coils, fan blades, and reusable air filters. Heavy-duty foam dissolves stains and loosens dirt. Neutralizes odors from standing water in drain pans. Free rinsing and nonabrasive formula. 19 oz. can.

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
275069-C	ACF19	19oz Foam Coil Cleaner	1/0/12	1.667	6.99 EA

White-Rodgers/Emerson

Heat Only Thermostat - Snap action switch for ease of installation, ideal for RVs and mobile homes. Thermostat does not require precise leveling. Adjustable heat anticipator for precise temperature control, decorative wall plate included. For heating only systems. Off- white.

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
436512-C	200	24v Heat Only Thermostat	1/0/6	.708	13.49 EA

HEATING/HVAC **THERMOSTAT**

No.

White-Rodgers/Emerson

Do it™ Heating And Cooling Thermostat - For most 24V applications for gas, oil, or electric furnaces and central air conditioning systems. 50° to 90° F. temperature range. Fan switch for constant or automatic fan

operation. Deluxe. Horizontal design.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
474053-C	474053	H/c Thermostat	1/0/6	.607	29.99 EA

White-Rodgers/Emerson

Thermostat - Deluxe heating and cooling thermostat. Exceptional accuracy, sealed switch for longer life and quiet operation, adjustable heat anticipator for precise temperature control. For gas, oil, or electric furnaces and central air conditioning systems. Off-white.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
404586-C	350	24v H/c Thermostat	1/0/6	.607	33.49 EA

White-Rodgers/Emerson

Programmable Thermostat - Deluxe digital thermostat. 3 programs: 1 for weekdays, 1 for Saturday, and 1 for Sunday. Compatible

with most 24V heating/cooling or heating only systems, and single stage heat pump systems. Reduces energy bills up to 33%. +/-1° accuracy. Meets EnergyStar™ specifications. ComfortSmart technology that maximizes energy savings and comfort. Simple start-up program with easy to follow menu. Large lighted display. Temporary temperature override and hold temperature feature. Temperature range from 45° to 90°.



Furnace filter change reminder. Retains programs during power outage or battery failure. Off-white.

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
436879-C	850	Digital Thermostat	1/0/6	.867	79.99 EA

White-Rodgers/Emerson

Do it™ Programmable Thermostat - For most 24V applications for heating/cooling or heating only systems. This deluxe digital features

2 separate programs...1 for weekdays and 1 for weekends. 4 temperature settings each day. Up to 4 time settings (2 set-backs) each day. Stores heating and cooling simultaneously. 50° to 90° F. Built-in freeze-up protection. 3 "AA" alkaline batteries to power thermostat (not included). Beige.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
474045-C	474045	Digital Thermostat	1/0/6	.867	39.49 EA

Honeywell International

Thermostat - The Round®. Heat only model. Deluxe single pull single throw, low volt, 24-30V, bimetal mercury switch, adjustable heat anticipator scale range 40° F. - 90° F., includes heating-only wall plate. 2-terminal. Requires a Q539 subbase for heating/cooling system and fan switching at the thermostat location. Taupe.

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
406377-C	T87F2873	Rnd Heat Only Thermostat	1/0/50	.200	34.99 EA

Honeywell International

Switching Subbase - For heating/cooling or cooling only systems. Use with a No. T87F thermostat. System switch:

Cool/Off/Heat; fan switch: On/Auto. Taupe, 2-wire.



Honeywell International

F. to 88° F. Off-white.

Thermostat - The Round® mechanical thermostat. 15-30V heat only or cool only model. Use with 24V gas, oil, steam, or hot water heating or central electric cooling. Works on 2-, 3-, 4-, and 5-wire applications. Temperature range: 42°



	Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
J	419389-C	CT87A-4025	White box, no decorator cover ring	1/0/25	.240	41.49 EA

Honeywell International

Mercury-free Round Thermostat - Electronic. Same look, feel, and footprint as the traditional round but slightly taller.

Easy-to-install and use. Classic round styling. Precise temperature control. Decorative cover ring included to hide wall marks. Works with most single stage, hot water, gas, or steam heating systems. Off white



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
446869-B	YCT87K1003	Heat only	1/0/6	.500	34.99 EA
446841-A	YCT87N1006	Heat/cool	1/0/6	.500	49.99 EA

Honeywell International

Standard Low Voltage Thermostat - Heat/cool model.

Replaces most 24V and millivoltage thermostats. Controls 4-wire 24V heating/cooling systems. Operates 15-30V AC circuits, use with gas, oil, and electric furnaces, and central electric cooling. Temperature range: 55° F. to 95° F. Off-white.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
404616-C	CT51A1035	Manual Stnd Thermostat	1/0/6	.333	38.99 EA

Honeywell International

Digital Manual Thermostat - Electronic thermostat with large easy-to-read display. Battery powered so it retains memory in the event of a power outage. Easy access

battery compartment. Slim compact design. Advanced temperature control ensures total comfort by minimizing termperature swings. Accurate to +/- 1° F. of set point. For use with central gas, oil, electric furnaces, and 750 millivolt heating, central air conditioning, and single stage heat pump.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
400435-C	YRTH110B1004	Mnual Digital Thermostat	1/0/6	.583	38.49 EA

Honeywell International

Programmable Thermostat - Digital programmable heat/cool

thermostat. 5/2 programming with 4 periods per day. Large easy-to-read display. Easy access battery

compartment. Filter change indicator.
Precise temperature control accurate to +/1° F. Use with central gas, oil, electric
furnaces, and central air. For single stage
heating and cooling or millivolt systems.
EnergyStar™ Rated.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
427365-C	YRTH230B1009	5-2 Program Thermostat	1/0/6	.543	47.99 EA

Honeywell International

Programmable Thermostat - Decorator digital heat/cool thermostat. 7 day programming with 4 periods per day. For use with gas,

oil, or electric furnaces and AC, single stage heating and cooling or milivolt systems. Large easy-to-read display with backlight that shows set-point, temperature, and program information. Includes 3 interchangeable faceplates to enhance decor (charcoal, taupe, titanium). Early start

function ensures preprogrammed temperature is reached by desired time. Easy access battery compartment. Filter

change indicator. Advanced temperature control ensures total comfort by minimizing temperature swings and is accurate to +/- 1° F. of set point. EnergyStar™ rated.

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
446128-C	YRTH2520B1004	7 Day Program Thermostat	1/0/6	.543	82.99 EA

Honeywell International

Programmable Thermostat - Vision conventional 5-1-1 day programmable. For heating and air conditioning systems. Universal

thermostat: Compatible with gas, oil, electric, heat pump, and millivolt heating and cooling systems. Adaptive intelligent recovery (smart response). Menu driven programming. Filter change reminder and low battery indicator. Armchair programming. 4 daily periods. EnergyStar™ rated. Precise temperature control (+/- 1°



F.). Easy-to-read back-lit display (on demand). Soft-key controls, simultaneously displays both room temperature and set point. Easy installation. Requires 2 "AAA" batteries (not included). Off-white.

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
438002-C	YRTH740001002	5-1-1 Program Thermostat	1/0/6	.725	109.99 EA

Honeywell International

Programmable Thermostat - Vision conventional 7 day programmable. For heating and air conditioning systems. Universal

thermostat: Compatible with virtually all HVAC systems. Adaptive intelligent recovery (smart response). Menu driven programming. Filter change reminder and low battery indicator. Armchair programming. 4 daily periods. EnergyStar™ rated. Precise temperature control (+/-1° F). Large, clear, backlit display 4.5 sq. in. of viewable area. Soft-key controls. Easy



installation. Real time clock that keeps time during a power failure. Requires 2 "AA" batteries (not included). Off-white.

	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
438011-C	YRTH7500D1002	5 Day Program Thermostat	1/0/6	.725	124.99 EA

REGISTERS HEATING/HVAC

Honeywell International

Programmable Touch Screen Thermostat - User friendly touch screen interface. 7 day programmable. For heating and/or air

conditioning systems. Universal thermostat:
Compatible with virtually all HVAC systems.
Adaptive intelligent recovery (smart response). Easiest to use Honeywell programmable ever. Filter change reminder and low battery indicator. Armchair



programming. 4 daily periods. EnergyStar™ rated. Precise temperature control (+/-1° F.). Large, clear, backlit display (on demand). Easy installation. Real time clock that keeps time during a power failure. Requires 3 "AAA" batteries (not included). Off-white.

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
438020-C	YRTH8500D1008	7 Day Program Thermostat	1/0/3	1.450	174.99 EA

Honeywell International

Mercury-free Thermostat For Heat Pump - Easy-to-install and use with simplified operation. Backlit display is easy-to-see and read.

Emergency and auxiliary heat +/- indication. Accurate termperature control of +/- 1° F. for consistent comfort. For use with heat pumps with auxiliary heat.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
446850-C	YTRH3100C1001	Mercury Free Thermostat	1/0/6	.500	59.99 EA

Honeywell International

Furnace Humidifier - This flow-thru by-pass whole house humidification unit is low maintenance, cost effective, and is simple to operate. This unit requires good access to a return duct and drain. The humidifier mounts on supply plenum or return. By-pass carries air from supply, through humidifier, to return. Standard control.

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
497428-В	HE220A1019	12 gallon per day, uses Vista model No. 710 filter	0/0/1	4.800	114.99 EA
497436-B	HE260A1010	17 gallon per day, uses Vista model No. 714 filter	0/0/1	4.200	134.99 EA

Honeywell International

Furnace Humidifier - Fan powered flow-thru, whole house humidification. Low maintenance. Includes PerfectFlo™ water distribution tray. Low water usage. Compact to allow mounting in more applications. Mounts on supply plenum. Air enters humidifier and is forced through the pad by the fan. Humidifies up to 4200 sq. ft. Uses Vista model No. 714 filter pad.

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
497444-A	HE360A1027	Furnace Humidifier	0/0/1	8.400	184.99 EA

Honeywell International

Current Sensing Relay - Use for older model furnaces. This sensing relay senses when furnace fan is on.

Product	Mfg.	Description	Order	Unit
No.	No.		Mult. Weigl	ht Cost
497460-C	32001754-001	Sensing Relay	1/0/10 .340	36.49 EA

Honeywell International

Locking Thermostat Guard - Ultra-clear chemical and UV-resistant acrylic resin cover and base resist yellowing. Secure,

tumbler type key lock; key removable only in locked position. Double-wall barrier in ring base blocks thermostat tampering tools, yet allows air circulation. Ring base mounts directly over existing thermostat; no removal required. Meets or exceeds UL pry test and impact test standards. Keyed alike.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
440205-C	CG511A1000	Fits most small and medium-size thermostats. Inner dimensions: 5-1/16" H. x 6-1/16" W. x 2-5/8" D.	1/0/6	1.250	13.49 EA
405523-C	CG512A1009	Fits most medium and large-size thermostats. Inner dimensions: 5-7/8" H. x 8-3/8" W x 3" D	1/0/4	2.000	17.49 EA

American Metal

Sidewall Register - Stamped steel. Horizontal multi-louvered valve

moves air pattern up for cooling and down for heating. Deflects air left and right 30° from center and 45° vertically. 1/2" vertical fins. 3 finishes: White; bright brass; and antique brass. The white comes in 7 sizes: 8" x 4"; 8" x 6"; 10" x 4"; 10" x 6"; 12" x 4";12" x 6"; and 14" x 6". The bright brass comes in 3 sizes: 10" x 6"; 12" x 6"; and 14" x 6". The antique brass comes in 2 sizes: 10" x 6" and 12" x 6".



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
439231-D	382W8X4-R	8x4 Wall Register	1/0/10	.890	6.49 EA
439223-D	382W8X6-R	8x6 Wall Register	1/0/10	1.200	6.79 EA
402591-D	382W10X4-R	10x4 Wall Register	1/0/10	1.300	7.29 EA
413494-D	382W10X6-R	10x6 Wall Register	1/0/10	1.600	7.49 EA
402605-D	382W12X4-R	12x4 Wall Register	1/0/10	1.500	8.29 EA
413500-D	382W12X6-R	12x6 Wall Register	1/0/10	1.820	7.99 EA
412279-D	382W14X6-R	14x6 Wall Register	1/0/10	1.700	9.29 EA
415715-D	356BB10X6	10x6 Wall Register	1/0/10	1.700	24.99 EA
415723-D	356BB12X6	12x6 Wall Register	1/0/10	2.100	26.49 EA
415758-D	356BB14X6	14x6 Wall Register	1/0/10	2.500	29.49 EA
415847-D	356AB10X6	10x6 Wall Register	1/0/10	1.700	24.99 EA
415855-D	356AB12X6	12x6 Wall Register	1/0/10	2.100	26.49 EA

HEATING/HVAC REGISTERS

American Metal

Sidewall Register - 3-way deflection with multi-louver damper. Controls air from 45° downward to any upward

deflection. White finish. 3 sizes: 10" x 6", 12" x 6", and 14" x 6".



American Metal

Baseboard Return Air Grille - Features 1/3" fin spacing and are swept back 23° to hide duct opening. Frame projects 7/8" to bring it flush with baseboard. White finish. 2 sizes: 12" x 6" and 14" x 6".



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
402335-D	383W10X6-R	10x6 3-way Register	1/0/10	1.550	7.79 EA

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
402672-D	375W12X6	12x6 Return Grille	1/0/10	1.500	5.29 EA
402680-D	375W14X6	14x6 Return Grille	1/0/10	1.600	5.79 EA

American Metal

Baseboard Register - Stamped steel. Features 1/4" fin spacing with multi-louvered damper. Frame projects 7/8" from wall to mount flush with baseboard. White finish. 2 sizes: 10" x 6" and 12" x 6".




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
402575-D	367W10X6	10x6 Baseboard Register	1/0/10	1.880	9.99 EA
402583-D	367W12X6	12x6 Baseboard Register	1/0/10	2.100	10.79 EA

Imperial Mfg Group

Plastic Floor Register - Made from durable, easy-to-clean, high-impact polystyrene plastic. Ideal for kitchens, baths, and

other high-humidity rooms. Wide variety of applications where complimentary colors are desired. Wide range of colors includes white, almond, bone white, taupe, grey, brown, wedgewood blue, dusty rose, and hunter green. Available sizes: 2-1/4" x 12", 4" x 10", and 4" x 12".



	140.	Besonption
402575-D	367W10X6	10x6 Baseboard Registe
402583-D	367W12X6	12x6 Baseboard Registe

American Metal

Return Air Grille - Sidewall. Stamped steel. Has 1/2" fin spacing and is deflected 30° to reduce see-through. 3

finishes: White; bright brass and antique brass. 3 sizes: 10" x 6"; 12" x 6"; and 14" x



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
415707-D	372W10X6	10x6 Return Grille	1/0/10	.900	4.49 EA
413537-D	372W12X6	12x6 Return Grille	1/0/10	1.100	4.29 EA
413546-D	372W14X6	14x6 Return Grille	1/0/10	1.350	4.49 EA
415766-D	377BB10X6	10x6 Return Grille	1/0/10	.900	11.99 EA
415774-D	377BB12X6	12x6 Return Grille	1/0/10	.900	13.79 EA
415782-D	377BB14X6	14x6 Return Grille	1/0/10	1.100	14.49 EA
415898-D	377AB12X6	12x6 Return Grille	1/0/10	.900	13.79 EA
415901-D	377AB14X6	14x6 Return Grille	1/0/10	1.100	14.49 EA

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
482404-D	RG1449	2-1/4" x 12" white	1/0/9	.444	3.99 EA
482412-D	RG1292	4" x 10" white	1/0/9	.500	3.99 EA
482420-D	RG1458	4" x 12" white	1/0/9	.556	3.99 EA
482501-D	RG1452	2-1/4" x 12" almond	1/0/9	.444	3.99 EA
482528-D	RG1478	4" x 10" almond	1/0/9	.563	3.99 EA
482536-D	RG1461	4" x 12" almond	1/0/9	.556	3.99 EA
482358-D	RG1454	2-1/4" x 12" bone white	1/0/9	.444	3.99 EA
482366-D	RG1471	4" x 10" bone white	1/0/9	.500	3.99 EA
482374-D	RG1463	4" x 12" bone white	1/0/9	.556	3.99 EA
482544-D	RG1453	2-1/4" x 12" taupe	1/0/9	.444	3.99 EA
482323-D	RG1326	4" x 10" taupe	1/0/9	.500	3.99 EA
482331-D	RG1462	4" x 12" taupe	1/0/9	.556	3.99 EA
482439-D	RG1450	2-1/4" x 12" grey	1/0/9	.444	3.99 EA
482447-D	RG1429	4" x 10' grey	1/0/9	.500	3.99 EA
482455-D	RG1459	4" x 12" grey	1/0/9	.556	3.99 EA
482463-D	RG1451	2-1/4" x 12" brown	1/0/9	.444	3.99 EA
482471-D	RG1293	4" x 10" brown	1/0/9	.500	3.99 EA
482498-D	RG1460	4" x 12" brown	1/0/9	.556	3.99 EA
482390-D	RG1472	4" x 10" wedgewood blue	1/0/9	.500	3.99 EA
482552-D	RG1464	4" x 12" wedgewood blue	1/0/9	.556	3.99 EA
482609-D	RG1474	4" x 10" dusty rose	1/0/9	.563	3.99 EA
482579-D	RG1473	4" x 10" hunter green	1/0/9	.500	3.99 EA
482587-D	RG1465	4" x 12" hunter green	1/0/9	.556	3.99 EA

American Metal

Baseboard Diffuser - All steel, slim-line design make this unit excellent for heating and cooling applications. Damper included.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
402559-D	3018W18-R	White finish, 18" L. x 5" H. x 2-3/4" D.	1/0/12	2.083	9.79 EA
415839-D	3018BB18	Bright brass finish, 18" L. x 3-1/2" H. x 2-3/4" D.	1/0/12	2.800	31.49 EA
415960-D	3018AB18	Antique brass finish, 18" L. x 3-1/2" H. x 2-3/4" D.	1/0/12	2.800	31.49 EA

HEATING/HVAC AIR DEFLECTOR

American Metal

Baseboard Diffuser - Compact, made of heavy gauge steel. Adjustable volume damper. White finish. 4-1/2" H. x 2-13/16" D. x 15" L.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost

Air Deflector - For heating and cooling. Thick clear plastic. Adjusts

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
400328-D	3015W15-R	15" Baseboard Diffuser	1/0/12	2.270	8.79 EA

American Metal

Ceiling Diffuser - Round. 2-ring. Stepdown face design. Stamped steel. White finish. 2 sizes: 6" and 8".



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
402613-D	1500W6-R	6" Ceiling Diffuser	1/0/10	1.200	8.29 EA

American Metal

Ceiling Diffuser Damper And Frame - For model No. 77R diffuser. Nylon rack and pinion gears hold damper firmly in any position for quiet operation at high velocities, and easy damper movement. Galvanized steel butterfly damper. 2 sizes: 6" and 8".

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
402648-D	1800B6-R	6" Ceiling Damper	1/0/10	.600	11.49 EA

Deflect-O Corp.

Air Deflector With Filter - For heating and cooling. Thick clear plastic. Adjusts from 10" to 14". Held by magnets. Replaceable dust filter included in each unit.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
418989-D	52	Air Deflector W/filter	1/0/24	.500	3.29 EA

438912-D Heat Floor Deflector 1/0/48

Deflect-O Corp.

Deflect-O Corp.

from 10" to 14". Permanent metal latch

magnet. For floor and sidewall registers.

Air Deflector - Economical, energy efficient, low profile design. Adjusts from 10" to 14". Triple strength rubber magnets and clear plastic. 2 pack.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
408573-D	101	Register Air Defector	1/0/48	.542	1.79 EA

Purolator Air Filtration

Do it™ Furnace Filter - Designed specifically for residential and light commercial applications. Increased dust holding capacity. MonoBond design seals made to frame and prevents any air bypass. UPC on each panel filter. Classified by UL. 1" size.

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
430117-E	430117	14 x 20 x 1	0/0/12	.263	.99 EA
430108-D	430108	14 x 25 x 1	0/0/12	.308	.99 EA
430082-E	430082	16 x 20 x 1	0/0/12	.288	.99 EA
430073-E	430073	16 x 25 x 1	0/0/12	.338	.99 EA
430046-E	430046	20 x 20 x 1	0/0/12	.342	.99 EA
430037-F	430037	20 x 25 x 1	0/0/12	396	99 FA

HEATING/HVAC

Purolator Air Filtration

Furnace Filter - Increased dust holding capacity. Monobond design seals media to frame and eliminates need for metal. For residential and light commercial applications. Classified by UL. 1" size.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
430162-D	F312-10X10X1	10x10x1 Air Filter	0/0/12	.133	1.49 EA
430153-D	10055.011020	Fbrgl 10x20x1 Air Filter	0/0/12	.242	.99 EA
430135-D	10055.011220	Fbrgl 12x20x1 Air Filter	0/0/12	.283	.99 EA
430126-D	10055.011224	Fbrgl 12x24x1 Air Filter	0/0/12	.342	.99 EA
411432-F	10055.011225	Fbrgl 12x25x1 Air Filter	0/0/12	.350	1.99 EA
404888-F	10055.011424	Fbrgl 14x24x1 Air Filter	0/0/12	.350	1.99 EA
430091-D	10055.011520	Fbrgl 15x20x1 Air Filter	0/0/12	.325	.99 EA
406563-F	10055.011616	Fbrgl 16x16x1 Air Filter	0/0/12	.283	1.99 EA
430055-F	10055.011825	Fbrgl 18x25x1 Air Filter	0/0/12	.458	1.99 EA
405591-F	10055.012424	Fbrgl 24x24x1 Air Filter	0/0/12	.508	2.29 EA
430028-D	FII-12-25X25X1	25x25x1 Air Filter	0/0/12	.283	1.99 EA

Purolator Air Filtration

Furnace Filter - Scrim-backed reinforced side. High-capacity 1" industrial strength air filters. Larger effective filter area. UL listed. Mono-bond frame is heat-sealed to fiberglass to prevent sagging.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
430171-E	F312-8X16X1	8x16x1 Air Filter	0/0/12	.192	1.79 EA
400747-E	F312-10X24X1	10x24x1 Air Filter	0/0/12	.292	1.79 EA
404926-E	F312-14X14X1	14x14x1 Air Filter	0/0/12	.275	1.79 EA
406180-D	F312-18X18X1	18x18x1 Air Filter	0/0/12	.358	1.79 EA
406171-D	F312-18X24X1	18x24x1 Air Filter	0/0/12	.442	1.79 EA
406117-D	F312-20X30X1	20x30x1 Air Filter	0/0/12	.725	2.29 EA
420271-D	F312-24X30X1	24x30x1 Air Filter	0/0/12	.858	2.29 EA

Precisionaire

Furnace Filter - Mono-bond design with fiberglass heat-sealed to frame. Scrim-backed reinforced side. 2" size. For light commercial applications.



	-		Description	No.	No.
430224-E 10155.021620 Fbrgl 16x20x2 Air Filter 0/0/12 .883 2	ilter 0/0/12 .883 2.49	0/0/12 0x2 Air Filter	Fbrgl 16x20x2	10155.021620	430224-E

AIR DEFLECTOR

Continued From Previous Column

months.

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
430215-E	10155.021625	Fbrgl 16x25x2 Air Filter	0/0/12	.717	2.49 EA
430206-E	10155.022020	Fbrgl 20x20x2 Air Filter	0/0/12	.700	2.49 EA
430199-E	10155.022025	Fbrgl 20x25x2 Air Filter	0/0/12	.642	2.49 EA

Purolator Air Filtration

Puro Pleat® Ultra Air Filter - This high efficiency, electrostatic

home air filter is a patented dual action design. The blue layer removes larger particles, pollen, pet dander, and lint. The white electrostatic layer traps over 95% of airborne contaminants, dust mites, plant spores, viruses, bacteria, and smoke. This filter helps to make a healthy home by giving allergy relief, dust control, and a more efficient furnace. Recommended to change filter at least every 3



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
424536-D	PPD14X20X1	14" x 20" x 1"	0/0/12	.517	3.99 EA
424528-D	PPD14X25X1	14" x 25" x 1"	0/0/12	.533	3.99 EA
474274-D	PPD16X20X1	16" x 20" x 1"	0/0/12	.475	3.99 EA
474282-D	PPD16X25X1	16" x 25" x 1"	0/0/12	.558	3.99 EA
474290-D	PPD20X20X1	20" x 20" x 1"	0/0/12	.583	3.99 EA
474304-D	PPD20X25X1	20" x 25" x 1"	0/0/12	.725	3.99 EA

Purolator Air Filtration

Basic Furnace Filter With Wrap Insert - This filter combines

high performance filtration capability with a unique Monobond frame construction. The result is an economical,

high capacity, medium to high efficiency air filter designed for applications where a 1" disposable panel filter may be used. Benefits include it being 4 times more efficient than fiberglass filters and the pleat design increases air flow and dust holding capacity for small particles up to 5 microns or larger. Lasts up to 90 days. Individually wrapped.



1	Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
	496952-B	MPW10X20X1	10" x 20" x 1"	0/0/12	.333	1.99 EA
1	496960-B	MPW12X20X1	12" x 20" x 1"	0/0/12	.442	1.99 EA
ľ	496979-B	MPW12X24X1	12" x 24" x 1"	0/0/12	.533	1.99 EA
1	496987-B	MPW14X20X1	14" x 20" x 1"	0/0/12	.417	1.99 EA
ľ	496995-B	MPW14X25X1	14" x 25" x 1"	0/0/12	.642	1.99 EA
1	497002-B	MPW15X20X1	15" x 20" x 1"	0/0/12	.442	1.99 EA
1	428019-B	MPW16X20X1	16" x 20" x 1"	0/0/12	.475	1.99 EA
1	425923-B	MPW16X25X1	16" x 25" x 1"	0/0/12	.583	1.99 EA
1	425079-B	MPW20X20X1	20" x 20" x 1"	0/0/12	.583	1.99 EA
	463612-B	MPW20X25X1	20" x 25" x 1"	0/0/12	.683	1.99 EA
	497010-B	MPW24X24X1	24" x 24" x 1"	0/0/12	.767	1.99 EA
	497029-B	MPW25X25X1	25" x 25" x 1"	0/0/12	.817	1.99 EA

FURNACE FILTER HEATING/HVAC

Purolator Air Filtration

Purolator 2000 Filter - Designed exclusively for home use where airborne irritants measure in the 5 to 100 micron size.

This includes grease, soot, dust, pollen, pet dander, and mold. The pleat configuration is enclosed in a 2-piece, heavy-duty board frame. Your hands never have to touch the contaminated media during the filter changeout process. UL Class 2 approved and listed.



3M

Dust And Pollen Reduction Filter - Electrostatic filter material captures particles and provides cleaner air, home, and duct work.

Effective at capturing large airborne allergens like mold, spores, pollen, and large particles like dust and lint. Up to 3 months of filtering performance. Educational partner of the American Lung Association's® Health House® project. Blue label.



Unit

Order

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
455377-D	82655.052025	20x25x5 Air Bear Filter	0/0/2	4.000	25.99 EA

Purolator Air Filtration

Furnace Filter - The FME series is a medium efficiency, self-supporting, extended surface, panel type air filter. The media area and initial air flow resistance have been carefully balanced to give flow capacity up to 625 FPM without sacrificing dust holding capacity. Double wall construction, explanded metal support grid, adhesive bonds media to the frame. High wet strength beverage board frame, lofted non-woven cotton/polyester media. Diagonal support member bonded to pleats.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
436259-F	80055.021620	16x20x2 Furnace Filter	0/0/12	1.000	6.99 EA
436240-F	80055.021625	16x25x2 Furnace Filter	0/0/12	1.100	6.99 EA
436216-F	80055.022020	20x20x2 Furnace Filter	0/0/12	1.142	6.99 EA
436119-F	80055.022025	20x25x2 Furnace Filter	0/0/12	1.350	6.99 EA
436100-F	80055.022424	24x24x2 Furnace Filter	0/0/12	1.346	6.99 EA

No.	No.	Description	Mult.	Weight	Cost
404411-B	9830DC-6	16 x 20 x 1	1/0/6	.840	7.99 EA
404403-B	9831DC-6	16 x 25 x 1	1/0/6	1.033	7.99 EA
404381-B	9832DC-6	20 x 20 x 1	1/0/6	1.040	7.99 EA
404349-B	9833DC-6	20 x 25 x 1	1/0/6	1.207	7.99 EA
492035-B	9834DC-6	14 x 25 x 1	1/0/6	.575	7.99 EA
492043-B	9835DC-6	14 x 20 x 1	1/0/6	.563	7.99 EA

3M

Product

Allergen Reduction Filter - Filtrete™ ultra allergen reduction filter.

Captures large allergens like mold spores and pet dander, microscopic allergens like dust, smoke, smog particles, bacteria, and particles that can carry viruses. Up to 3 months of filtering performance. Meets the American Lung Association's® Health House® indoor air quality guidelines. Purple label.



3M

Allergen Reduction Filter - Electrostatically charged Filtrete™

fibers work like magnets to remove 92% of dust, pollen, and mold. They effectively remove particles as small as 3 microns of smoke and pet dander making them 20 times more effective than ordinary furnace/air conditioner filters. Each provides 3 months of protection under normal conditions. Red label.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
428183-A	9807DC-6	10 x 20 x 1	1/0/6	.467	12.99 EA
413348-B	9810DC-6	12 x 12 x 1	1/0/6	.497	13.79 EA
439347-A	9819DC-6	12 x 20 x 1	1/0/6	.567	12.99 EA
439339-A	9820DC-6	12 x 24 x 1	1/0/6	.683	12.99 EA
433853-A	9811DC-6	14 x 14 x 1	1/0/6	.542	12.99 EA
428159-A	9805DC-6	14 x 20 x 1	1/0/6	.617	12.99 EA
428140-A	9804DC-6	14 x 25 x 1	1/0/6	.733	12.99 EA
400033-A	9823DC-6	14 x 24 x 1	1/0/6	.742	12.99 EA
433861-A	9824DC-6	14 x 30 x 1	1/0/6	.743	14.99 EA
428167-A	9806DC-6	15 x 20 x 1	1/0/6	.175	12.99 EA
437021-D	9816DC-6	16 x 16 x 1	1/0/6	.593	17.79 EA
428108-A	9800DC-6	16 x 20 x 1	1/0/6	.667	12.99 EA
437030-D	9825DC-6	16 x 24 x 1	1/0/6	.687	17.79 EA
428116-A	9801DC-6	16 x 25 x 1	1/0/6	.800	12.99 EA
414402-B	9817DC-6	18 x 18 x 1	1/0/6	.640	13.49 EA
439355-A	9821DC-6	18 x 24 x 1	1/0/6	.868	12.99 EA
428124-A	9802DC-6	20 x 20 x 1	1/0/6	.800	12.99 EA
428132-A	9803DC-6	20 x 25 x 1	1/0/6	.883	12.99 EA
479942-A	9822DC-6	20 x 30 x 1	1/0/6	.953	14.99 EA
413519-B	9812DC-6	24 x 24 x 1	1/0/6	1.205	18.49 EA
414298-B	9815DC-6	25 x 25 x 1	1/0/6	1.048	18.49 EA

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
491926-A	2000DC-6	16 x 20 x 1	1/0/6	.652	16.99 EA
491934-A	2001DC-6	16 x 25 x 1	1/0/6	.682	16.99 EA
491942-A	2002DC-6	20 x 20 x 1	1/0/6	.710	16.99 EA
491950-A	2003DC-6	20 x 25 x 1	1/0/6	.775	16.99 EA
491969-A	2004DC-6	14 x 25 x 1	1/0/6	.617	16.99 EA
491977-A	2005DC-6	14 x 20 x 1	1/0/6	.582	16.99 EA
491985-A	2007DC-6	10 x 20 x 1	1/0/6	.505	16.99 EA
400257-A	2011DC-6	14 x 14 x 1	1/0/6	.538	17.99 EA
437049-C	2019DC-6	12 x 20 x 1	1/0/6	.648	21.49 EA
413143-A	2015DC-6	25 x 25 x 1	1/0/6	1.088	18.49 EA
491993-A	2020DC-6	12 x 24 x 1	1/0/6	.603	16.99 EA
492000-A	2021DC-6	18 x 24 x 1	1/0/6	.773	16.99 EA
492019-A	2022DC-6	20 x 30 x 1	1/0/6	.970	18.99 EA
492027-A	2023DC-6	14 x 24 x 1	1/0/6	.610	16.99 EA
400275-A	2024DC-6	14 x 30 x 1	1/0/6	.913	18.99 EA

HEATING/HVAC FURNACE FILTER

Precisionaire

Furnace Filter - Disposable panel type for furnace and central air systems. Metal grid on both sides gives extra strength. Filters are Class II, UL approved.

			(=	Processary w. so. 1 may 301		
Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost	
481734-C	10255.01814	Nominal size; 8 x 14 x 1, actual size: 7-7/8 x 13-7/8 x 3/4	0/0/12	.313	2.79 EA	
437158-D	10255.011020	Nominal size: 10 x 20 x 1, actual size: 9-7/8 x 19-7/8 x	0/0/12	.458	1.29 EA	
437212-C	10255.011212	3/4 Nominal size: 12 x 12 x 1, actual size: 11-7/8 x 11-7/8 x	0/0/12	.417	1.79 EA	
437166-C	10255.011220	3/4 Nominal size: 12 x 20 x 1, actual size: 11-7/8 x 19-7/8 x	0/0/12	.521	1.29 EA	
437174-C	10255.011224	3/4 Nominal size: 12 x 24 x 1, actual size: 11-7/8 x 23-7/8 x	0/0/12	.563	1.29 EA	
481718-C	10255.011230	3/4 Nominal size: 12 x 30 x 1, actual size: 11-7/8 x 29-7/8 x	0/0/12	.660	1.79 EA	
437182-D	10255.011420	3/4 Nominal size: 14 x 20 x 1, actual size: 13-7/8 x 19-7/8 x	0/0/12	.542	1.29 EA	
437190-D	10255.011425	3/4 Nominal size: 14 x 25 x 1, actual size: 13-7/8 x 24-7/8 x	0/0/12	.667	1.29 EA	
481742-C	10255.011430	3/4 Nominal size: 14 x 30 x 1, actual size: 13-7/8 x 29-7/8 x	0/0/12	.728	1.79 EA	
437204-D	10255.011520	3/4 Nominal size: 15 x 20 x 1, actual size: 14-7/8 x 19-7/8 x	0/0/12	.500	1.29 EA	
456470-D	10255.011616	3/4 Nominal size: 16 x 16 x 1, actual size: 15-7/8 x 15-7/8 x	0/0/12	.521	1.49 EA	
437107-D	10255.011620	3/4 Nominal size: 16 x 20 x 1, actual size: 15-3/4 x 19-1/2 x	0/0/12	.604	1.29 EA	
437115-D	10255.011625	3/4 Nominal size: 16 x 25 x 1, actual size: 15-3/4 x 24-5/8 x	0/0/12	.708	1.29 EA	
437220-C	10255.011818	3/4 Nominal size: 18 x 18 x 1, actual size: 17-7/8 x 17-7/8 x	0/0/12	.604	1.49 EA	
437239-C	10255.011824	3/4 Nominal size: 18 x 24 x 1, actual size: 17-7/8 x 23-7/8 x	0/0/12	.833	1.49 EA	
481726-C	10255.011830	3/4 Nominal size: 18 x 30 x 1, actual size: 17-7/8 x 29-7/8 x	0/0/12	.773	3.99 EA	
437123-D	10255.012020	3/4 Nominal size: 20 x 20 x 1, actual size: 19-5/8 x 19-5/8 x	0/0/12	.688	1.29 EA	
437247-C	10255.012024	3/4 Nominal size: 20 x 24 x 1, actual size: 19-7/8 x 23-7/8 x	0/0/12	.792	1.79 EA	
437131-D	10255.012025	3/4 Nominal size: 20 x 25 x 1, actual size: 19-5/8 x 24-5/8 x	0/0/12	.792	1.29 EA	
437271-D	10255.012030	3/4 Nominal size: 20 x 30 x 1, actual size: 19-7/8 x 29-7/8 x	0/0/12	1.042	2.29 EA	
437255-C	10255.012222	3/4 Nominal size: 22 x 22 x 1, actual size: 21-7/8 x 21-7/8 x	0/0/12	.792	1.79 EA	
437263-C	10255.012424	3/4 Nominal size: 24 x 24 x 1, actual size: 23-7/8 x 23-7/8 x	0/0/12	.938	1.79 EA	
499463-C	10255.012430	3/4 Nominal size: 24 x 30 x 1, actual size: 23-7/8 x 29-7/8 x 3/4	0/0/12	1.188	2.49 EA	

Precisionaire

Grille Furnace Filter - Grille size air filters are specially made to fit Metal Aire brand return air grilles. Disposable panel

type for furnace and central air systems. Metal grid on both sides gives extra strength. Filters are Class II, UL approved.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
437298-D	10355.011212	Nominal size: 12 x 12 x 1, actual size: 11-1/8 x 11-3/8 x 3/4	0/0/12	.417	2.79 EA
437301-D	10355.011818	Nominal size: 18 x 18 x 1, actual size: 17-1/8 x 17-3/8 x 3/4	0/0/12	.604	2.79 EA
437328-D	10355.012020	Nominal size: 20 x 20 x 1, actual size: 19-1/8 x 19-3/8 x 3/4	0/0/12	.688	2.79 EA
437336-D	10355.012222	Nominal size: 22 x 22 x 1, actual size: 21-1/8 x 21-3/8 x 3/4	0/0/12	.792	2.79 EA
437344-D	10355.012412	Nominal size: 24 x 12 x 1, actual size: 23-1/8 x 11-3/8 x 3/4	0/0/12	.563	2.79 EA
437360-D	10355.012418	Nominal size: 24 x 18 x 1, actual size: 23-1/8 x 17-3/8 x 3/4	0/0/12	.833	2.79 EA
437379-D	10355.012420	Nominal size: 24 x 20 x 1, actual size: 23-1/8 x 19-3/8 x 3/4	0/0/12	.792	2.79 EA
437387-D	10355.012424	Nominal size: 24 x 24 x 1, actual size: 23-1/8 x 23-3/8 x 3/4	0/0/12	.938	2.79 EA
437395-D	10355.013018	Nominal size: 30 x 18 x 1, actual size: 29-1/8 x 17-3/8 x 3/4	0/0/12	1.042	2.79 EA
481750-D	10355.013020	Nominal size: 30 x 20 x 1, actual size: 29-1/8 x 19-3/8 x 3/4	0/0/12	.954	2.79 EA
437409-D	10355.013024	Nominal size: 30 x 24 x 1, actual size: 29-1/8 x 23-3/8 x 3/4	0/0/12	1.188	3.29 EA

Dicon Global

Carbon Monoxide Detector - American Sensors™. Monitors and

detects carbon monoxide gas. It measures the concentration and sounds a loud alarm (85dB) when a potentially harmful level is reached. 2-stage warning and alarm feature: *Warning*-50 parts per million; *alarm*-100 parts per million. Instant test/reset button. No batteries or replacement sensor required. 4-7/8" x 2-3/4" x 1-3/8". 120V. Designed to meet ammended Underwriters Laboratories standard UL2034.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
406945-B	COAU-805E	Plug-in	1/0/6	.750	27.99 EA
407143-B	COAU815C	Direct wire, for professional installation only	1/0/6	.750	34.49 EA

GAS DETECTORS HEATING/HVAC

Dicon Global

Carbon Monoxide Detector - American Sensors™. 120V plug-in

with digital LED display feature. Displays carbon monoxide concentration in parts per million. Loud 85dB alarm. Green power LED, red alarm LED. Instant test/reset feature. 6-1/2" x 3-1/2" x 1-3/8".



KIDDE

NightHawk™ Carbon Monoxide Detector - This premium

carbon monoxide detector with its digital readout from 0 to 999 PPM warns of even low carbon monoxide levels. Updated digital reading every 2-1/2 minutes lets you see if level changes. Never needs recalibration. Features also a state-of-the-art sensor, peak level memory display, loud 85dB alarm, and a test/reset button allows you to

Description

Digital Co Detecor

immediately reset unit. 5 year limited warranty.



Weight

.417

Unit Cost

45.49 EA

Order Mult.

1/0/2

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
408328-B	COAU-915C	Digital Co Detector	1/0/6	.750	42.99 EA

Dicon Global

Carbon Monoxide Detector - American Sensors™. 120V plug-in

with a back-up power source (9V alkaline battery). Digital LED display. Displays carbon monoxide concentration in parts per million. 9V battery included. Loud 85dB alarm. Low battery warning. Battery removal indicator. Green power LED, red alarm LED. Instant test/reset feature. 6-1/2" x 3-1/2" x 1-3/8".



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
408646-B	COAU-925C	Digital Co Detector	1/0/6	.750	52.99 EA

Dicon Global

Carbon Monoxide Detector Test Kit - American Sensors™. Kit contains all the items necessary to ensure the American Sensor carbon monoxide detectors are working properly. Kit contains: 1 vial of carbon monoxide and 1 plastic bag. Test the unit annually.

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
402435-C	CO-909A	Co Test Kit	1/0/10	.125	4.99 EA

Dicon Global

Gas Detector - American Sensors™. Locate this 120V AC direct

plug-in in any outlet. Easy installation, simply plug in. Set to alarm before gas levels reach 25% of lower explosive level. Loud 85dB alarm. Instant test feature. Power and alarm light indicators. No batteries required. 5 year comprehensive warranty.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
474460-B	LP2002C	Propane gas	1/0/6	1.000	41.49 EA
474479-B	NG2002C	Natural gas	1/0/6	1.000	41.49 EA

KIDDE

900-0056-02

461792-B

NightHawk™ Carbon Monoxide Detector - This premium

plus carbon monoxide detector has a digital readout with a continuous digital display of all carbon monoxide levels from 0 to

999 PPM. It also features a peak level memory. In the event of a power outage the 9V battery back up will operate the unit for a minimum of 4 hours. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
461784-B	900-0076-01	Digital Co Detector	1/0/2	.433	52.99 EA

Heat Controller, Inc.

Room Air Conditioner - Energy efficient economical cooling combines with attractive appearance in the Compact-Aire™

series. Decorator grilles come in a neutral stone white finish to blend with any decor, while lightweight cabinets are durable galvanized steel. 5000 BTU 115V. Contains 2 speed fan, thermostatic control, window mounting kit, and slide out washable filter. Cools approximately 150 sq. ft. 12-1/4" H. x 18-5/8" W. x 15-1/8" D.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
563315-B	RG-51-5	5000btu Air Conditioner	0/0/1	40.000	99.99 EA

Heat Controller, Inc.

Room Air Conditioner - The Compact-Aire™ series is designed for efficient cooling of smaller spaces. Features includ

attractive decorator front grilles in stone white color with adjustable air direction. Easy-to-access, slide-out, washable filters. 24 hour On/Off timer, 2 fan and 2 cool speeds, and 1° temperature adjustment. Includes Adjust-A-Ease installation system and remote control. 6000 BTU, cool approximately 210 sq. ft. 115V, 60HZ.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
510334-A	RAD-61-5	6000btu Air Conditioner	0/0/1	52.000	169.99 EA

HEATING/HVAC

Heat Controller, Inc.

Room Air Conditioner - Energy efficient economical cooling combines with attractive appearance in the Compact-Aire™

series. Decorator grilles come in a neutral stone white finish to blend with any decor, while lightweight cabinets are durable galvanized steel. 8000 BTU 115V. Contains electronic controls with full feature remote, 2 speed fan, 24 hour On/Off timer, window mounting kit, and slide out washable filter. Cools approximately 350 sq. ft. 12-1/4" H. x 18-5/8" W. x 15-1/8" D.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
563323-B	RAD-81-5	8000btu Air Conditioner	0/0/1	54.000	229.99 EA

Heat Controller, Inc.

Room Air Conditioner - The Compact-Aire™ series is designed for efficient cooling of smaller spaces. Features include

attractive decorator front grilles in stone white color with adjustable air direction. Easy-to-access, slide-out, washable filters. 24 hour On/Off timer, 3 fan and 3 cool speeds, and 1° temperature adjustment. Includes Adjust-A-Ease installation system and remote. 10,000 BTU, cool approximately 490 sq. ft. 115V, 60 Hz.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
510511-B	RAD-101-5	10000btu Air Conditioner	0/0/1	80.000	299.99 EA

Heat Controller, Inc.

Room Air Conditioner - Energy efficient economical cooling

combines with attractive appearance in the Power-Aire $^{\text{TM}}$

series. Decorator grilles come in a neutral stone white finish to blend with any decor, while lightweight cabinets are durable galvanized steel. 12,000 BTU 115V. Contains electronic controls with full feature remote, 3 speed fan, 24 hour On/Off timer, window mounting kit, exhaust vent, slide out washable filter, and slide out chassis. Cools approximately 650 sq. ft. 15" H. x 23-5/8" W. x 21-3/4" D.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
563331-B	RAD-121-5	12000btu Air Conditioner	0/0/1	95.000	329.99 EA

Heat Controller, Inc.

Portable Air Conditioner - Portable-Aire™ air conditioner cools

without the need for ductwork, special wiring or other installation. Designed for *spot* cooling, these units are ideal for situations where a window isn't available for a regular room air conditioner, or where temporary cooling is needed. Great for warehouses, apartments, temporary offices, and other residential and commercial uses. Features include (2) 6' flexible hoses, 1 for air intake and the other for hot air exhaust. 24 hour timer, energy saver function, and super cool mode. Digital touchpad controls with remote. Easy access, washable filters to remove impurities from the air and vertical oscillating louvers. 12,000 BTU, cools approximately 550 sq. ft., removes 2.3 PT/Hr of moisture. 115V. 60 Hz.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
510361-A	PD121-5	12000btu Air Conditioner	0/0/1	97.000	599.99 EA

AIR CONDITIONER ACCESSORIES

Thermwell Prods. Co.

A/C Safe® Air Conditioner Window Supports - Air

conditioner supports transfer the weight of the air conditioner from the window sash and sill to the support and window frame. Constructed for long service life, made of epoxy-coated steel with stainless steel hardware, nylon fixtures, and neoprene rubber mounting pads. Air

neoprene rubber mounting pads. Air conditioner supports ensure a more secure installation with minimal chance of damage to the window, window parts, or outside

wall. Fits wall thickness 4" to 11". Easy indoor installation eliminates all exterior work. 2 year limited warranty. White.

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
274968-C	ACB80H	Light-duty, load rated to 80 lb., use with most 5000 to 10,000 BTU units	1/0/6	2.500	38.99 EA
274976-C	ACB160H	Heavy-duty, load rated to 160 lb., use with most 12,000 to 24,000 BTU units	1/0/6	3.167	49.99 EA

Square D Co.

Air Conditioner Disconnect - Nonfused 60A air conditioner disconnect for residential and commercial use, enclosed molded case switch. 2-wire, rainproof, maximum 10 HP rating. 60A/240V. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
537985-C	QO200TRCP	A/c Disconnect	1/0/10	3.000	17.99 EA

Cutler Hammer

Air Conditioner Disconnect - Air conditioning disconnect, pullout, fused, 2-pole, 120/240VAC metallic, galvanized steel enclosure. 9" x 5.5" x 3". NEMA 3R, rainproof, 1 year warranty. CSA approved, UL listed.

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
563307-C	DPF221RP	30A, 1.5 HP at 120V, 3 HP at 240V	0/0/1	3.250	17.49 EA
527987-C	DPF222RP	60A, 3 HP at 120V, 10 HP at 240V	1/0/5	3.000	17.49 EA

BASE BOARD HEATER

HEATING/HVAC

Woods Ind.

Appliance Cord, Air Conditioner - Beige 14/3 replacement cord for air conditioner and other major appliances or equipment. 15A, SPT-3. UL listed.

M-D Building Products

Air Conditioner Weatherstrip - Premium high-density foam for use with window air conditioning units. Wedges between sash. 1/2" T. x 1-3/8" W. x 42" L.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
549282-C	0043	3'	1/0/15	.467	5.49 EA
560944-C	0046	12'	1/0/12	1.417	9.99 EA
560952-C	0047	15'	1/0/12	1.750	12.99 EA

Thermwell Prods. Co.

Air Conditioner Filter And Weatherseal Kit - Frost King® combination pack filter and weatherseal. Made of open cell foam, filter is

15" H. x 24" W. x 1/4" T. Air conditioner filter removes dust and pollen from the air inside the home, helping the air conditioner unit work more efficiently. The foam air conditioner weatherseal is made of compressible open cell polyurethane foam. It seals out drafts, dust, and rain around window air conditioner unit. Also acts as an efficient cushion to help reduce noise and vibration. Weatherseal measures 1-1/4" W. x 1-1/4" T. x 42" L.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
266299-D	FAC1	Ac Filter/weathrseal Kit	1/0/24	.278	3.29 EA

Thermwell Prods. Co.

Air Conditioner Side Insulating Panels - Insulating urethane foam panels reduce noise and vibration. Self-stick side channels included

for new or replacement installation. Side panels will fit most window units. Cut foam panel and plastic channel to proper height and install. 2 side panels per package 9" W. x 18" H. x 7/8" T. Color: Charcoal.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
266035-D	AC14H	Insulting Ac Side Panels	1/0/6	1.167	17.49 EA

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
272264-D	50005	Beige	1/0/12	.320	3.79 EA
272299-D	50007	Brown	1/0/12	.320	3.79 EA

Fahrenheat/Marley

Electric Convector Baseboard Heater - Chimney fin heating element design provides for quick, maximum warm-air circulation. Quiet operation. Easy installation. Safety thermal

cut-out protection in case of air flow blockage. UL listed for installation on wall at floor level with wall-to-wall carpeting. White enamel finish. Thermostat not included. 5 year limited warranty.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
406384-C	F2543	240V, 750W, 2560 BTU/hr. 3' long	0/0/1	9.000	33.49 EA
406740-C	F2514	120V, 1000W, 3413 BTU/hr., 4' long	0/0/1	11.000	38.99 EA
406376-C	F2544	240V, 1000W, 3413 BTU/hr., 4' long	0/0/1	11.000	38.99 EA
406546-C	F2516	120V, 1500W, 5120 BTU/hr., 6' long	0/0/1	16.000	52.99 EA
406341-C	F2546	240V, 1500W, 5120 BTU/hr. 6' long	0/0/1	16.000	52.99 EA
406430-C	F2548	240V, 2000W, 6826 BTU/hr., 8' long	0/0/1	21.000	62.99 EA

Fahrenheat/Marley

Thermostat - For installed Fahrenheat F2500 Series Electric Convector baseboard heaters. Rated 22A at 120-240V. Temperature range: 40° F. to 100° F. Mounts into the junction box at either end of the unit. Does

Description

Single pole

feature)

Double pole (positive off

not add length to heater. White.

Mfg. No.

FTA1A


FTA2A

Product

404535-C

408506-C

No.



Fahrenheat/Marley

Electric Hydronic Baseboard Heater - With low surface

temperatures, natural convection and large fin areas, this heater operates cleaner and quieter than fan forced $\,$

systems. Heats and cools more slowly, reducing room temperature fluctuations. Freeze-proof liquid solution is sealed permanently inside heater element; won't evaporate and never needs replenishing. Automatic thermal shutoff protection. Easy



installation. Mounts flush to wall at floor level or can be mounted above the floor for vacuuming or cleaning of the floor. White finish. Thermostat not included. UL listed. 10 year limited warranty.

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
404551-C	PLF504	240V, 500W, 1706 BTU/hr., 2'2" long	0/0/1	10.000	134.99 EA
404594-C	PLF1504	240V, 1500W, 5120 BTU/hr., 5'10" long	0/0/1	22.000	234.99 EA

Fahrenheat/Marley

Thermostat - For installed Fahrenheat PLF Series Electric Hydronic baseboard heaters. Double-pole - has positive *off*

Temperature range: 60° F. to 120° F. Mounts into the junction box at either end of the unit. Does not add length to heater. White.



Del-Rain Corp.

Electric Heater With Thermostatic Comfort Control

Adjustable thermostatic comfort control maintains heat level. 1500W/5200 BTU. Rated 120V, 12.5A, 60Hz. 3 settings,

High/Low/Fan. Automatic safety shutoff switch safeguards against overheating. *Cool-to-the-touch* cabinet. Fan forced circulation. Power indicator light. 1 year warranty. White.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
484474-B	LT1022	Heater W/therm Control	1/0/6	4.327	21.49 EA

Del-Rain Corp.

Ceramic Workshop Heater - Lifetime™ heater with dual power output and heating elements that generate a powerful 1500W,

enough to heat large home workshops. Adjustable thermostatic comfort control automatically maintains a constant heat level. Automatic safety shutoff to prevent overheating. Easy portability with carrying handle. High visibility yellow controls. High/low fan control. Limited 1 year warranty.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
404438-C	PT2DS	Double Pole Thermostat	0/0/1	1.000	32.99 EA

	Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
Α	473618-B	LT1565	Workshop Heater	1/0/6	5.650	46.49 EA

Fahrenheat/Marley

Remote Wall Mounted Line Voltage Thermostat - Double pole thermostat; snap action switch. 22A at 120/240V acrylic cover.

Mounts in standard 4" wall box. 45° F. to 75° F. temperature range.



Del-Rain Corp.

Ceramic Disk Furnace - LifeTime™. Uses low-temperature solid ceramic heating discs. Exceptionally safe. Features: push button controls, true automatic temperature control, built-in tip-over automatic shutoff switch,

flashing red panel lights, and audio alarm. Temperature range: 50° F. to 80° F. 1500W/5200 BTU. 120V. Brown plastic cabinet comes with a built-in carry handle. Limited lifetime warranty.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
408514-C	MD26R	Dbl Pole Wall Thermostat	1/0/6	1.000	17.79 EA

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
408964-C	1500V	Cermc Disc Furnace	1/0/6	7.117	104.99 EA

HEATING/HVAC

The Holmes Group

Utility Heater - Holmes® Insta Furnace™ has an all-metal durable

housing and mesh grill. Large convenient top controls and rear handle for safe, simple operation. Comfort control thermostat with anti-freeze setting automatically maintains desired temperature. 2 heat settings (750W and 1500W) for variable, efficient heat selection with maximum output.



olmes.	settings (1000W and 1500W). Carry handle. Automatic safety shutoff with manual reset.

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
420024 0	LIEUECOC II	Ossillating Cooss Hoston	1/0/4	E 200	44.00 EA

Oscillating Heater - Holmes®. A stylish, sleek design that fits in with

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
428272-C	HCH4051	Ceramic Heater	1/0/6	2.850	32.99 EA

The Holmes Group

Fan Forced Heater - Holmes® 1500W portable heater. 2 heat settings (1000W and 1500W). Cord wrap, pedestal base, and carry handle. Automatic safety shutoff.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
438642-C	HFH105	Fan-forced Heater	1/0/6	2.067	21.49 EA

Holmes

Portable Heater - Holmes®. Rounded compact housing design to

save space. Wide circular grill opening directs heat

flow and maximizes comfort. Comfort control thermostat automatically maintains desired temperature level. Oversized controls for simple, easy operation. Automatic safety shutoff system with a safety tip over switch. 2 heat settings (1000W and 1500W) for variable heat selection. White.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
438650-C	HFH111T-U	Compact Fan/heater	1/0/6	3.000	24.49 EA

Holmes

The Holmes Group

most home and office decors. Motorized oscillation

for wide area heating. 1-touch thermostat. 2 heat

Utility Heater - Sturdy, large commercial-grade design with integrated

fan system and shroud for a powerful, concentrated heat output. Comfort control thermostat automatically maintains desired temperature level. Rubber carry grip on top handle for portability. Front protective bars. All-metal housing and tough construction. Total safety system, including protective front guards and tip-over protection. Convenient front controls. 2 heat settings: 1300W or 1500W.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
428256-B	PUH680-U	1300w Utility Heater	0/0/1	8.000	24.49 EA

Mr. Heater

Radiant Heater - Propane. 6000 to 12,000 BTU/hr. For use with disposable propane cylinder. Complete with sturdy plastic stand. Includes: High-Medium-Low regulator and safety shutoff valve that automatically cuts gas flow if burner flame goes out.

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
424544-C	F273200	Lp Gas Radiant Heater	1/0/12	3.167	64.99 EA

HEATING/HVAC HEATERS

Mr. Heater

portable stove (stand included).

Heater And Cooker - Infra-red propane heater or cooker has a safety shut-off valve, High-Medium-Low regulator, and soft nose P.O.L. It connects directly to a disposable propane cylinder (14.1 oz. to 16.4 oz.) Heat can be adjusted from 8000 to 14,000 BTU. Use for heating or as a



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
473405-C	F273300	Heater/cooker	1/0/8	4.375	62.99 EA

Mr. Heater

LP Radiant Heater - Propane. Variable output of 6000, 9000, and 12,000 BTU/hr. High-Medium-Low regulator, safety shutoff and soft nose P.O.L. For direct connection to 4-20 lb. bulk cylinder. High fire time: 36 hours (20 lb. cylinder).



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
424560-C	F273100	Lp Gas Radiant Heater	1/0/12	3.500	59.99 EA

Mr. Heater

LP Radiant Double Heater - Propane. Variable output of 6000, 9000, 12,000, 18,000, and 24,000 BTU/hr. 2 safety shutoffs, High-Medium-Low regulator, and soft nose P.O.L. -- run 1 burner or 2. For direct connection to 20 lb. bulk cylinder. High fire time: 18 hours (2 burner operation).



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
424579-C	F273600	Lp Double Radiant Heater	1/0/4	11.000	124.99 EA

NOTE 1: Propane cylinder not included.

Mr. Heater

Portable Buddy Heater - Indoor safe propane heater. Radiant heater provides safe heat for chilly garages, tents, patios,

porches, cabins, etc. It has been designed and approved also for indoor use. Automatic low-oxygen shutoff system. Uses 1 lb. or 20 lb. propane cylinder with optional hose connection model No. F273701 (5') or F273702 (12'). Free standing or wall mount. Quiet, odor-free, lightweight, portable. Easy to carry 4000 and 9000 BTU settings. Heats up to 250 sq. ft. Fuel cylinders not included. Low oxygen sensor prohibits use at altitude above 7000'.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
489387-B	F273400	Lp Portable Buddy Heater	1/0/6	12.000	104.99 EA

Mr. Heater

LP Radiant Triple Heater - 3 independent adjustable burners with 8 heat settings ranging from 8000 to 42,000 BTUs, this heater provides fast, efficient outdoor heat. You can use 1, 2, or 3 burners. It will heat approximately 750 square feet and mounts on any 20 lb. or 100 lb. propane tank. It's perfect for vehicle maintenance, outdoor jobs, recreation and poolside areas, and building construction sites. High fire time is 10 hr. on a 20 lb. tank with all 3 burners operating.

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
473413-C	F273900	Lp Gas Infrared Heater	0/0/1	10.000	159.99 EA

Mr. Heater

Suspended Garage Heater - Efficient and effective convection gas heater. Easily heats 2 and 3 car garages. Low profile design

that requires only 1" clearance from ceiling with 2 angle brackets. Power exhaust allows for vertical or horizontal venting (vent kit sold separately). Designed for right and left side piping, electrical, and flue connections





by simply rotating 180°. Aluminized tubular heat exchanger for maximum efficiency and longer life. Spark ignition features self-diagnostic control module. Available in LP and natural gas. Cabinet size 12" x 18" x 25".

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
445717-A	F260145	LP	0/0/1	63.000	434.99 EA
445708-A	F260045	Natural gas	0/0/1	63.000	434.99 EA
445726-A	F102845	Horizontal vent kit	0/0/1	13.000	89.99 EA
445735-A	F102840	Vertical vent kit	0/0/1	33.000	74.99 EA

Well Trvld Lvg-YNTH

Copper Patio Heater - Adjustable to 40,000 BTU. Heat range: Up to

17' diameter. Reliable Piezo ignition system. Stainless steel burners and heating grid. Uses standard 20 lb. propane tank (not included). Auto shut-off - tilt valve. 32" aluminum reflector hood, 5-piece. Weighted 20" base - 91" overall height. Packed in 1 carton. CSA approved.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
801010-B	SHCSPH-CO	Copper Patio Heater	0/0/1	56.000	299.99 EA

PROPANE HEATER HEATING/HVAC

Desa International

Propane Portable Convection Heater - Reddy Heater®. Variable 80,000 to 200,000 BTU/hr. Heats up to 37,600 cu. ft. Fully assembled with debris shield and push button piezo ignition. UL listed hose and regulator included. Runs on

1 or more 100 lb. propane cylinders. *Made in U.S.A.*



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
449571-B	RCP200V	80-200m Reddy Heater	0/0/1	52.000	124.99 EA



LP Propane Tank - Cylinder is for use on all standard or quick

connect couplings on new or existing gas grills, stoves, lanterns, and heaters. See list to determine correct cylinder needed. UL listed. Propane cylinder is powder point gray to resist rust and corrosion. The new Overfill Prevention Device (OPD) affects incoming liquid propane flow only. Does not affect normal propane gas discharge when properly connected to the appliance regulator.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
805262-A	281149	4.25 lb.	1/0/100	4.250	45.99 EA
805267-A	281166	11 lb.	1/0/100	13.750	47.99 EA
842605-A	281247	Meets 1998 Type I with OPD, 20 lb.	1/0/60	17.000	29.99 EA
842613-A	281232	Meets 1998 Type II quick disconnect with OPD for older model Ducane/Weber, 20 lb.	1/0/60	17.000	38.99 EA
811963-A	281278	30 lb. tank with QCV and OPD	1/0/64	33.875	54.99 EA
805276-A	297297	33.5 lb.	1/0/36	33.500	169.99 EA
812005-A	294235	40 lb. tank with QCV and OPD	1/0/48	44.806	74.99 EA
833215-A	282155	100 lb. gray tank with 10% valve and collar	1/0/18	75.000	94.99 EA
801118-A	302746	20 lb. flamesaver cylinder with OPD and built-in reserve that gives approximately 60 minutes additional cooking time	1/0/60	17.000	35.99 EA

Mr. Heater

Bulk Cylinder Adapter - Without handwheel. (1"-20 throwaway cylinder thread x P.O.L.). Allows appliances designed for use on throwaway cylinders, and with a hose/regulator assembly to be attached directly to a bulk cylinder (i.e. Mr. Camper, Coleman Co., Inc., or Century Primus Stove).

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
424781-D	F276132	Cylinder Adapter	1/0/6	.500	9.49 CD

Mr. Heater

Adapter Tee - (P.O.L. x 1"-20 throwaway cylinder thread x Female P.O.L.) Conveniently use your camper/trailer propane supply for lanterns, table top barbecue, etc., at parks, campsites, rest stops. Use with hose assembly model No. F273710 or F273711.

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
424706-D	F273751	Lp Gas Adapter Tee	1/0/6	1.167	34.49 CD

Mr. Heater

Propane Cylinder <emph>Y Male Adapter With

Handwheel - (Two 1"-20 throwaway cylinder threads x P.O.L.). Allows 2 appliances to be hooked up to a refillable cylinder. Use with hose assembly model No. F273710 or F273711.

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
444324-D	F271715	I n Cylinder "y"	1/0/6	1 167	27 /0 FA

Mr. Heater

Distribution and Lantern Post - 30"/15" post tee. (Three 1"-20 outlets). Hook up 3 appliances to a single refillable propane cylinder. Can hook up to new QCC-1® and old style cylinders. Use with hose assembly model No. F273710 or F273711.

ı						
	Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
١	425001-D	F271731	30/15" Lp Distrib Post	1/0/6	5.000	52.99 CD

Mr. Heater

Low Pressure Regulator - (3/8" Female pipe thread x P.O.L.). 11" low pressure regulator will operate barbecue grills and low pressure appliances.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
424811-D	F276136	Low Pressure Regulator	1/0/6	1.167	16.79 CD

Mr. Heater

90° Low Pressure Regulator - (3/8" Female pipe thread x P.O.L.). 11" low pressure regulator designed with 90° angle. Will operate all standard barbecue grills and appliances. For total assembly see model No. F271160.

	Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
1	424714-D	F273759	90d Regulator	1/0/6	1.000	14.79 CD

HEATING/HVAC

Mr. Heater

LP Regulator - Propane automatic 2 stage regulator. Use with 2 bulk cylinders, RVs, etc.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
480622-D	F273766	Lp Gas Regulator	1/0/6	1.833	74.99 EA

Mr. Heater

LP Regulator - Propane low pressure LP regulator. 1/4" Female pipe inlet x 3/8" pipe outlet. Use with low pressure appliances up to 200,000 BTU's.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
489352-D	F273767	Regulator	1/0/6	1.000	19.49 EA

Mr. Heater

Hose Assembly - (Swivel 1"-20 Male throwaway cylinder thread x P.O.L. with handwheel). Mr. Heater's most popular hose; permits the use of larger propane cylinders on appliances; designed for use with small disposable cylinders; convenient hand tightened swivel both ends. Used with Mr. Heaters portable Buddy™.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
424633-D	F273701	5'	1/0/6	1.500	23.99 CD
425435-D	F273702	12'	1/0/6	2.167	35.49 EA

Mr. Heater

Hose Assembly - (Swivel 1"-20 Male throwaway cylinder thread x swivel 1"-20 Female throwaway cylinder thread). Used with most distribution posts or T and Y connectors.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
444332-D	F273710	5'	1/0/6	1.167	22.99 EA
424617-D	F273711	12'	1/0/6	1.833	35.49 CD

Mr. Heater

5' Hose Assembly - (9/16" Female pipe thread x 9/16" Female pipe thread). Used to connect 1 hose or for additional length connect 2 model No. F276148 hoses with F276154.




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
424862-D	F276148	Hose Assembly	1/0/6	1.333	15.99 CD

PROPANE HEATER PARTS

Mr. Heater

5' Hose Assembly - (3/8" Female pipe thread x 3/8" Male pipe thread). Often used to connect low pressure appliances to low pressure regulators.



Mr. Heater

Quick Connector - Brass, 3/8" propane or natural gas guick connector. 3/8" Male pipe thread x 3/8" Female pipe thread CSA (AGA) certified, UL approved. Used with model No. F276124.

duct	Mfg.		Order		Unit	7
aucı	Mg.	Description	Order Mult	Weight	Cost	

1	Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
ł	499498-D	F276187	3/8" Gas Connector	1/0/6	.433	33.49 EA

Mr. Heater

Replacement Hose And Regulator Assembly - This is a 22" replacement barbecue hose and a 90° regulator assembly with an appliance end fitting (coupling nut) x 3/ 8" Female flare. Most commonly used



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
473421-C	F271161	Rplcmnt Hose & Regulator	1/0/6	1.317	24.99 EA

Mr. Heater

22" Hose Assembly - (3/8" Male pipe thread x 3/8" Female flare. Fits most barbecue gas grills.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
424684-D	F273716	22" Hose Assembly	1/0/6	.833	10.79 CD

Mr. Heater

5' Hose Assembly - (1/4" Male pipe thread x 1/4" Female pipe thread). Most commonly used on most weed burners, torches, and fish cookers.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
444340-D	F273717	5 Hose Assembly	1/0/6	1.000	17.79 EA

PROPANE HEATER PARTS

HEATING/HVAC

Mr. Heater

Quick Connector - Brass. 1/4" propane or natural gas quick connector and excess flow plug. 1/4" Male pipe thread x 1/4" Female pipe thread CSA (AGA) certified, UL approved. Used with model

certified, UL approved. Used with mode No. F276134, F276139, and F276140.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
499501-D	F276186	1/4" Gas Connector	1/0/6	.333	27.49 EA

Mr. Heater

P.O.L. WITH O-RING SEAL - Fits all refillable propane cylinders and appliances with 1/4" Female pipe inlet. Brass P.O.L. nut x 1/4" Male pipe.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
424897-D	F273756	With handwheel	1/0/6	.500	7.49 CD
424765-D	F276139	Without handwheel	1/0/6	.500	6.79 CD

Mr. Heater

Left Hand P.O.L - 9/16". With restricted flow. Without hand wheel (wrench tighten).



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
424889-D	F276129	9/16" Nut & Pigtail	1/0/6	.333	5.99 CD

Mr. Heater

Cylinder Adapter - Propane brass fitting.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
424668-D	F276130	1"-20 throwaway cylinder thread with shutoff x 9/16" left-hand Male thread	1/0/6	.333	7.49 CD
424900-D	F273755	1"-20 Male throwaway cylinder thread x 1/4" Male pipe thread	1/0/6	.333	7.49 CD

Mr. Heater

Cylinder Adapter - 1"-20 Female throwaway cylinder thread x 1/4" Male pipe thread.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
424935-D	F273754	1" 20fx1/4 Adapter	1/0/6	.333	7.49 CD

Mr. Heater

Cylinder Adapter - 1"-20 Male throwaway cylinder adapter x 1/4" Female pipe thread.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
424919-D	F276140	1" 20x1/4 Adapter	1/0/6	.333	5.79 CD

Desa International

Propane Portable Forced-Air Heater - Reddy Heater®. Heat Dragon® model. 30,000 BTU/hr. Ideal for small garages, shops, and

remodeling areas. Heats up to 6500 cu. ft. 12 hour run time. For use with 20 lb. propane cylinder (not included). Includes: Hose and regulator A.G.A. certified. *Made in U.S.A.*



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
432229-B	RLP30	30m Btu Reddy Heater	0/0/1	17.000	139.99 EA

ŒS/

Kerosene Portable Forced Air Heater Model B70ET

70,000 BTU/Hr. For medium construction commercial and agricultural applications. Heats 1,600 sq. feet, Runs 9.5 hours on a full 5 gallon tank. Quickly circulates heat with high capacity fan . Flame out



control system shuts heater down in the event of loss or lack of fuel. Exclusive patented hot surface ignition provides quieter operation, cleaner burning, and less maintanance. Multi-fuel use. ARL certified. Equipped with handle, tank drain plug, fuel gauge and thermostat. Solid-state controls.


> Mfa No. Description Order mult. B70ET 70,000 BTU 0/0/1

Weight Unit cost 33lbs \$ 241.29

Kerosene Portable Forced Air Heater

Model B165DT

165,000 BTU/Hr. For larger construction commercial and agricultural applications. Heats 3,900 sq. feet, Runs 11 hours on a full 13.5 gallon tank. Quickly circulates heat with high capacity fan . Flame out



Exclusive patented hot surface ignition provides quieter operation, cleaner burning, and less maintanance. Multi-fuel use. ARL certified. Equipped with pneumatic wheels, dual handles, tank drain plug extension cord cleats, fuel gauge and thermostat. Solid-state controls.

Mfg No.	Description	Order mult.	Weight	Unit cost
B165DT 16	5,000 BTU	0/0/1	69lbs.	\$ 361.93



Kerosene High Pressure Series **PRO PLUS SERIES** Model M200AT

200,000 BTU/Hr. For large construction commercial and agricultural applications. Heats 4,700 sq. feet, Runs 9.5 hours on a full 13.5 gallon tank. Built in thermostat maintains set temperatures & saves fuel.

(-30 degrees farenheit) rated start with kerosene. Power outlet for light tools & accessories. Easier Serviceability for reduced down times. Multi-fuel use. Solid-state controls. ARL certified.

Equipped with 10" Pneumatic tires, comfort handle & body lift handles, tank drain plug, fuel gauge and thermostat.

Mfg No.	Description	Order mult.	Weight	Unit cost	
M200AT 200),000 BTU	0/0/1	85lbs.	\$ 517.43	



Kerosene High Pressure Series Model B350D MASTER

350,000 BTU/Hr. For large construction commercial and agricultural applications. Heats 8,225 sq. feet, Runs 11 hours on a full 30 gallon tank. Quickly circulates heat with high capacity fan . Flame out

control system shuts heater down in the event of loss or lack of fuel. Continuous spark ignition system. Uses kerosene fuel only. Built-In Cappillary thermostat, tank drain plug and Fuel filler neck filter. Solid rubber wheels, handle, & solid state control system. ARL certified.

> Mfa No. Description Order mult. Weight Unit cost B350D 350,000 BTU 0/0/1 240lbs \$ 1499.00

Kerosene High Pressure Series Model B600D

600,000 BTU/Hr. For large construction commercial and agricultural applications. Heats 14,100 sq. feet, Runs 8 hours on a full 36 gallon tank. Quickly circulates heat with high capacity fan . Flame out

control system shuts heater down in the event of loss or lack of fuel. Continuous spark ignition system. Uses kerosene fuel only. Built-In Capillary thermostat, tank drain plug and Fuel filler neck filter. Solid rubber wheels, handle, & solid state control system.



0/0/1

390lbs.

\$ 1999.00

HEATER OVERVIEW KEROSENE FORCED AIR

B55CT 55,000 BTU W/T'STAT \$	213.
	041/
B70ET 70,000 BTU W/T'STAT \$	241.2
B115DT 115,000 BTU W/T'STAT \$	324.
B155DT 155,000 BTU W/T'STAT \$	361.
B165DT 165,000 BTU W/T'STAT \$	361.9
B200BT 200,000 BUT W/T'STAT \$	486.
M125AT 125,000 BTU W/T'STAT \$	378.
M170AT 170,000 BTU W/T'STAT \$	469.
M200AT 200,000 BTU W/T'STAT \$	517.
B350D 350,000 BTU W/T'STAT \$	1,499.
B600D 600,000 BTU W/T'STAT \$	1,999.

///Universal.



Propane/LP Forced Air Heater

MASTER

PRO-TOUGH SERIES



VARIABLE OUTPUTS SKUS

TB106 30,000-55,000 BTU 50.000-85.000 BTU TB111 75,000-125.000 BTU **TB107** TB108 125,000-170,000 BTU







Propane/LP Forced Air Heater **PRO-TOUGH SERIES** ///Universal Model TB111

50-85,000 BTU Propane Pro-Tough Series Perfect for garage, workshop or construction Lower Noise. 25% quieter than traditional

models & new atmospheric burner. Rugged design. Roll bar design for rugged-

ness and additional locations to carry or lift. Plastic end caps protects the heaters shell. Can be stacked horizontally, vertically or hung on wall for easy storage. Top mount controls to view and operate easier. Ergonomics. Balance carry handle for improved portability & mobility.

Indepenent foot and height adjustment. ARL certified.

Mfg No. Description Order mult. TB111 50-85,000 BTU N/A

125-170,000 BTU Propane Pro-Tough Series

Perfect for garage, workshop or construction.

Lower Noise. 25% quieter than traditional

PRO-TOUGH SERIES

Model TB108

Weight 23.30LB

Weight

29LB

Unit cost \$ 206.43



Propane/LP Forced Air Heater **PRO-TOUGH SERIES**

MASTER Model TB106

30-55,000 BTU Propane Pro-Tough Series. Perfect for garage, workshop or construction. Lower Noise. 25% quieter than traditional

models & new atmospheric burner.

Rugged design. Roll bar design for rugged-

ness and additional locations to carry or lift. Plastic end caps protects the heaters shell. Can be stacked horizontally, vertically or hung on wall for easy storage. Top mount controls to view and operate easier. Ergonomics. Balance carry handle for improved portability & mobility.

Indepenent foot and height adjustment. ARL certified.





models & new atmospheric burner. Rugged design. Roll bar design for ruggedness and additional locations to carry or lift. Plastic end caps protects the

heaters shell. Can be stacked horizontally, vertically or hung on wall for easy storage. Top mount controls to view and operate easier. Ergonomics. Balance carry handle for improved portability & mobility.

Indepenent foot and height adjustment. ARL certified.

Mfg No. Description Order mult.

150,000 BTU/Hr. Natural gas force air heater

TB108 125-170,000 BTU N/A

Mfg No. Description Order mult. Weight Unit cost TB106 30-55,000 BTU N/A 18.50LB \$ 170.24



Propane/LP Forced Air Heater **PRO-TOUGH SERIES** Model TB107

MASTER 75-125,000 BTU Propane Pro-Tough Series. Perfect for garage, workshop or construction.

Lower Noise. 25% guieter than traditional models & new atmospheric burner.

Rugged design. Roll bar design for rugged-

ness and additional locations to carry or lift. Plastic end caps protects the heaters shell. Can be stacked horizontally, vertically or hung on wall for easy storage. Top mount controls to view and operate easier.

Ergonomics. Balance carry handle for improved portability & mobility.

Indepenent foot and height adjustment. ARL certified.





Heats up to 3,500 sq. ft. Built in thermostat. Unit includes an electronic ignition, handle, high output fan and regulator only. ARL certified.

Natural Gas Forced Air Heater

Model BNG150T

Hose not included.



Unit cost

\$ 340.48

Mfg No.	Description	Order mult.		Weight	Unit cost	•
BNG15	OT 150,000	BTU	N/A	34LB	\$ 399.00	

Mfa No. Description Order mult. Weight Unit cost TB107 75-125,000 BTU N/A 23LB \$ 226.54





PROPANE/LP RADIANT HEATERS Model 35-R

Propane/LP Radiant Heater
35,000 BTU, Heat up to 820 SQ. FT.,
Piezo ignition, wheels and handle.
Includes hose and regulator.
Requires 20 to 100 lb. Propane tank.
NO ELECTRICITY REQUIRED





Mfg No.	Description	Order Multiples	Weight	Unit Cost	
35-R	35,000 BTU	N/A	24LB	\$ 130.03	



PROPANE/LP RADIANT HEATERS Model 125-R

Propane/LP 360 degrees of radiant heat 125,000 BTU, Heats up to 2,900 SQ. FT. Piezo ignition, wheels and handle. Includes hose & regulator. Requires a 100lb or more propane tanks NO ELECTRICITY REQUIRED

NATURAL GAS RADIANT HEATERS Model 125-RN

Natural Gas 360 degrees of radiant heat 125,000 BTU, Heats up to 2,900 SQ. FT. Piezo ignition, wheels and handle.

Includes REGULATOR only NO ELECTRICITY REQUIRED

///Universal.





Propane

Natural

Mfg No.	Description	Order Multiples	Weight	Unit Cost
125-R	125,000 BTU	N/A	46.5LB	\$ 221.18
125-RN	125,000 BTU	N/A	46.5LB	\$ 221.18



TANK TOP RADIANT HEATERS Model TT15G MASTER

10 TO 15,000 BTU Propane Radiant Heater 3 heat settings, Matchlight ignition and Regulator included. Uses a 4lb to a 30lb Propane tank. (Propane tank not included)

NO ELECTRICITY REQUIRED

Model TT30G

10 to 30,000 BTU Propane Radiant Heater 6 heat settings, Pieso ignition and Regulator included. Uses a 20lb to a 100lb Propane tank. (Propane tank not included) Each head swivels 180 degrees and operates independently.

NO ELECTRICITY REQUIRED

Mfg No.	Description	Order Multiples	Weight	Unit Cost
TT15G	10-15,000 BTU	N/A	4LB	\$ 42.90
TT30G	10-30,000 BTU	N/A	10.5LB	\$ 85.79









PROPANE/LP CONVECTION HEATER Model TC80VC

Propane/LP Convection Heater
40 to 80,000 BTU, adjustable heat output
Collapsible shell for easy storage.
Piezo ignition.
Lightweight and portable.
Heats up to 1,900 sq, ft.
Hose and Regulator included.

MASTER



NO ELECTRICITY REQUIRED

Propane tank not included

Mfg No.	Description	Order Multiples	Weight	Unit Cost
TC80VC	40-80,000 BTU	N/A	20.05LB	\$ 109.92



PROPANE/LP CONVECTION HEATER Model TC200VA

Propane/LP Convection Heater
75-200,000 BTU, adjustable heat output
Collapsible shell for easy storage.
Piezo ignition, Pilot light.
Uses 100lb or more propane tank
Lightweight and portable.
Hose and Regulator included.

MASTER



NO ELECTRICITY REQUIRED

Propane tank not included

Mfg No.	Description	Order Multiples	Weight	Unit Cost
TC200VA	75-200,000 BTU	N/A	21.25LB	\$ 109.92



NATURAL GAS CONVECTION HEATER Model TC100

Natural Gas/NG Convection Heater 100,000 BTU Natural Gas lightweight and portable Regulator only Hose not included





NO ELECTRICITY REQUIRED Hose not included

-		11000 1101 111014	aoa	
Mfg No.	Description	Order Multiples	Weight	Unit Cost
TC100	100,000 BTU	N/A	22LB	\$ 158.18



MASTER

DESA.

MASTER

Propane/LP PATIO HEATERS Model TD101 Bistro table/bar height patio heater

Perfect for the patio or deck.

Designed for year round use. Quiet-efficient heat distributes warmth 360 degrees.

Adjustable heat output

High- 16,000 btu runs approx. 26 hours

Low- 9,500 btu runs approx. 45 hours

Sturdy base houses a 20lb "Gas Grill" cylinder

Propane cylinder not included.



Outdoor jeisure.


Easy start electronic ignition. NO ELECTRICITY REQUIRED

Mfg No. Description Order mult. TD101 9,500-16,000 BTU N/A

Weight Unit cost **82LB** \$ **316.35**

ASTED

Outdoor reisure.



Perfect for the patio or deck.
Designed for year round use. Quiet-efficient
Heat distributes warmth 160 degrees.
Adjustable heat output
High- 36,500 btu runs approx. 12 hours

Low- 20,000 btu runs approx. 21 hours
Sturdy base houses a 20lb "Gas Grill" cylinder
Propane cylinder not included.

Easy start electronic ignition.

NO ELECTRICITY REQUIRED

Mfg No. Description Order mult. Weight Unit cost TD100 20-36,500 BTU N/A 92LB \$340.48



MASTER

PROPANE RADIANT PATIO HEATERS



Four (4) Different Finishes!!! 40,000 BTU
Heats a 12 to 15 foot circle for up to 12 hours
on one 20 lb. Gas grill cylinder.
Propane Cylinder not included
34" Rust Free Aluminum reflector
Automatic safety tip-over devise
Wheel kit included. Outdoor use only.

NO ELECTRICITY REQUIRED

Model SPC-54PHS STAINLESS STEEL PATIO HEATER

Model SPC-54PHB BLACK PROPANE PATIO HEATER



Model SPC-54PHW

WHITE PROPANE PATIO HEATER



Mfg No.	Description Ord	ler mult.	Weight	Unit cost
SPC-54PHS	40,000 BTU	N/A	88LB	\$ 348.53
SPC-54PHB	40,000 BTU	N/A	88LB	\$ 219.84
SPC-54PHW	40,000 BTU	N/A	88LB	\$ 219.84
SPC-54PHT	40,000 BTU	N/A	88LB	\$ 219.84

PROPANE Table Top RADIANT PATIO HEATERS Model SPC-21PHTSA

Stainless steel table top radiant heater heats a 4 to 7 foot circle for up to 2 hours on one 164 oz propane sylinder. Propane tank or cylinders not included.

10-15,000 BTU Piezo ignitor, adjustable heat output, automatic safety tip over device Stainless steel burner and Emiter screen. Outdoor use only.

NO ELECTRICITY REQUIRED



 Mfg No.
 Description
 Order mult.
 Weight
 Unit cost

 SPC-21PHTSA
 10-15,000 BTU
 N/A
 20LB
 \$ 109.92

DESAHEATING PRODUCTS



Model PL35VPA

Perfect for the patio or deck.
Designed for year round use.
Quiet-efficient, wind resistant.
Runs on a 20/30/40 lp tank
Adjustable heat output
High- 35,000 BTU, Up to 12 hours
Low- 22,000 BTU, Up to 21 hours
Piezo ignition

Propane cylinder not included.

Outdoor use only.

NO ELECTRICITY REQUIRED



Mfg No.	Description	Order mult.	Weight	Unit cost
PL35VPA	22-35,000 BTU	N/A	35LB	\$ 214.48

HEATING/HVAC KEROSENE HEATER

Product

Desa International

Kerosene Portable Forced-Air Heater - Reddy Heater®.

40.000 BTU/hr. Heats 1-car garages, workshops, and other unheated areas up to 900 sq. ft. or 6500 cu. ft. 10 hour run time on full 3 gallon tank. Multi-fuel

use; uses kerosene No. 1 and No. 2, diesel and fuel oil. JP-8 or Jet A fuel. Solid-state controls. ARL listed. Optional model No. HA1210 external thermostat available.



Desa International

Variable Propane Forced Air Heater - This Heat Dragon™

Reddy Heater® heats up to 1150 sq. ft. It has 3 heat settings. Hose and

regulator and piezo matchless ignition is included. Runs 8 to 12 hours on a 20 lb. cylinder (not included). For DIY projects, remodeling and light construction projects. 1 year warranty. 30,000-40,000-50,000 BTU/hr. Made in U.S.A.



Unit

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
434667-B	R40	40m Btu Reddy Heater	0/0/1	42.000	209.99 EA

Desa International

Kerosene Portable Forced-Air Heater - Reddy Heater®. 60,000 BTU/hr. Warms most 2-car garages, contractor work areas, and

workshops up to 1400 sq. ft. 11 hour run time on full 5 gallon tank. Multi-fuel use; uses kerosene No. 1 and No. 2, diesel and fuel oil. JP-8 or Jet A fuel. Solid-state controls. ARL listed. Optional model No. HA1210 external thermostat available.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
439458-B	R60A	60m Btu Reddy Heater	0/0/1	43.000	249.99 EA

Desa International

Kerosene Portable Forced-Air Heater With Thermostat -

Reddy Heater®. 70,000 BTU/hr. Heavy-duty rated for larger garages,

shops, and small commercial applications. Heats 13,100 cu. ft. 10 hour run time. Multi-fuel use; uses kerosene No. 1 and No. 2, diesel and fuel oil, JP-8 or Jet A fuel.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
447226-B	R70ET	Reddy Heater W/thermstat	0/0/1	38.000	279.99 EA

Desa International

Propane Portable Forced-Air Heater - Reddy Heater®. 3 heat settings: 65/85/100.000 BTU/hr. Ideal for small to medium construction

sites, workshops or other areas. Heating area (cu. ft.): 11,300/16,000/18,800. Must use 100 lb. tank or larger (not included). Includes: hose and regulator. A.G.A. pending. Made in U.S.A.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
449598-B	RLP125V	65-100m Reddy Heater	0/0/1	30.000	244.99 EA

Order Mult. Description Weight No. 458597-B RLP55\ 17.000 204.99 E

Desa International

Mfg.

Kerosene Portable Forced Air Heater With Thermostat -Reddy Heater®, 115,000 BTU/hr, For medium construction, commercial.

and agricultural applications. Heats 2700 sq. ft. 10-1/2 hour run time on full 9 gallon tank. Quickly circulates heat with high capacity fan. Flame out control system shuts heater down in the event of loss or

lack of fuel. Exclusive patented hot surface ignition provides quieter operation, cleaner burning, and less maintenance. Fuel gauge and built-in thermostat. Multi-fuel use: uses kerosene No. 1 and No. 2, diesel and fuel

oil, JP-8 or Jet A fuel, Solid-state controls, ARL certified, Equipped with wheels and handles. Made in U.S.A.

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
439500-B	R115DT	115m Btu Reddy Heater	0/0/1	57.000	369.99 EA

Desa International

Kerosene Portable Forced-Air Heater With Thermostat -

Reddy Heater®. 155,000 BTU/hr. For larger construction, commercial and

industrial applications. Heats up to 3600 sq. ft. 12 hour run time on full 13.5 gallon tank. Lighted power switch, fuel gauge, and 10" pneumatic tires. Multi-fuel use; uses kerosene No. 1 and No. 2, diesel and fuel oil, JP-8 or Jet A fuel. Solid-state controls. ARL certified. Optional model No. HA1210 external thermostat available.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
439494-B	R155D	155m Btu Reddy Heater	0/0/1	65.000	464.99 EA

Desa International

Kerosene Portable Forced-Air Heater With Thermostat -

Reddy Heater®. 165,000 BTU/hr. with built-in thermostat. Extra heavy-duty rated for larger commercial,

industrial, and agricultural uses. Runs up to 10-1/2 hours on full tank. 13-1/2 gallon tank. Multi-fuel use; uses kerosene No. 1 and No. 2, diesel and fuel oil, JP-8 or Jet A fuel. Solid-state controls. ARL certified.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
449563-B	R165DT	165m Btu Reddy Heater	0/0/1	70.000	419.99 EA

Kaz/Yantian

Metal Heater - Heat Giant™. This sturdy durable heater has a pivot

handle that folds for easy storage. Safety features include: tip over switch, child-resistant power control, auto off high limit switch, motor thermal cut-off fuse, back-up thermal circuity breaker, 3-prong grounded plug, caution, power lights, and extra wide base. Approximate size: 11" L. x 8" W. x 17 D. Gray.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
497479-B	HZ2110	Heat Giant Heater	1/0/4	18.900	34.99 EA

Desa International

Blower With Thermostat - Optional blower accessory designed to increase air circulation and therefore maximize heat

distribution. Can be used on the following Desa heaters: Model No. CBN20T, CBN30T, CBP20T, CBP30T, GWRP16, GWRP16T, GWRN18, GWRP26, GWRP26T, GWRN30, GWRN30T, and GWRN18T.




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
400084-C	GA3250T	Blower W/thermostat	0/0/1	4.000	72.99 EA

Desa International

Vent-Free Infrared Gas Heater - Glo-Warm. Operating on the same principle as the sun's heat. The ceramic tiles (plaques) radiate a

warm, redish glow which heats objects in the room before heating the air. Each heater is A.G.A. certified for safety and contains an oxygen depletion sensor. The O.D.S. system monitors the oxygen level in the area used, automatically shutting off the gas supply before dangerous levels are reached. No electricity needed, available in natural gas or propane gas models. This unit serves as an affordable supplement to central heating. No outside venting is required as the heater burns 99.9% clean and efficient. Top mounted controls and push button ignition make



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
492795-B	GWRN10	Natural gas; 2 plaque; 10,000 BTU-heats up to 300 sq. ft.; 2 heat settings; 7" D. x 13-1/2" W. x 21-1/2" H., manual control, must be wall mounted, no blower available	0/0/1	14.000	94.99 EA
492809-B	GWRP10	LP gas; 2 plaque; 10,000 BTU-heats up to 300 sq. ft.; 2 heat settings; 7" D. x 13-1/ 2" W. x 21-1/2" H., manual control, must be wall mounted, no blower available	0/0/1	14.000	94.99 EA

Continued Next Column

Continued From Previous Column

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
492817-B	GWRN18	Natural gas; 3 plaque; 18,000 BTU-heats up to 600 sq. ft.; 3 heat settings; 8" D. x 18-1/4" W. x 24-1/2" H., manual control	0/0/1	24.000	124.99 EA
492825-B	GWRP16	LP gas; 3 plaque; 18,000 BTU-heats up to 600 sq. ft.; 3 heat settings; 8" D. x 18-1/ 2" W. x 24-1/2" H., manual control	0/0/1	24.000	124.99 EA
492876-B	GWRN30	Natural gas; 5 plaque; 30,000 BTU-heats up to 1000 sq. ft.; 3 heat settings; 8" D. x 25-1/2" W. x 24-1/2" H., manual control	0/0/1	33.000	149.99 EA
492884-B	GWRP26	LP gas; 5 plaque; 26,000 BTU-heats up to 1000 sq. ft.; 3 heat settings; 8" D. x 25-1/ 2" W. x 24-1/2" H., manual control	0/0/1	33.000	149.99 EA
492833-B	GWRN18T	Natural gas; 3 plaque; 18,000 BTU-heats up to 600 sq. ft.; auto heat settings; 8" D. x 18-1/4" W. x 24-1/2" H., thermostatic control	0/0/1	25.000	169.99 EA
492841-B	GWRP16T	LP gas; 3 plaque; 16,000 BTU-heats up to 600 sq. ft.; auto heat settings; 8" D. x 18-1/4" W. x 24-1/2" H., thermostatic control	0/0/1	25.000	169.99 EA
492892-B	GWRN30T	Natural gas; 5 plaque; 30,000 BTU-heats up to 1000 sq. ft.; auto heat setting; 8" D. x 25-1/2" W. x 24-1/2" H., thermostatic control	0/0/1	33.000	204.99 EA
492906-B	GWRP26T	LP gas; 5 plaque; 26,000 BTU-heats up to 1000 sq. ft.; auto heat settings; 8" D. x 25-1/2" W. x 24-1/2" H., thermostatic control	0/0/1	33.000	204.99 EA

NOTE: Use model No. GA3250T blower for 16,000 BTU and larger models use model No. GA4550 floor mounting kit for 16,000 BTU and larger models. NOTE: Banned in the State of California. If you live in the state of Arizona, Idaho, Nevada, New Mexico, North Dakota, Minnesota, South Dakota, or Washington; please check your local code authorities because restrictions on installing vent-free gas appliances may exist.

Outdoors Unlimited

Replacement Wick - For Toyotomi/Kerosun Kerosene Heaters.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
406600-D	20451813	Wick for model No. R36 (thru G), S/S (all)	1/0/12	.150	13.99 EA
436410-D	20450013	Wick for model No. R40, R10 (N), 0-85 (I), SSII	1/0/12	.325	18.49 EA
406627-D	20452013	Wick for model No. 085 (D thru H)	1/0/12	.167	17.79 EA
406635-D	20451913	Wick for model No. 0105 (E thru I)	1/0/12	.177	21.49 EA
406651-D	22741513	Wick for model No. 0120 (A, B), 0-105 (M, N)	1/0/12	.325	26.99 EA

NOTE: When choosing a replacement wick, check for both the model number and alpha letter which is at the end of the type code found on the heater by the battery cover.

HEATING/HVAC KEROSENE HEATER

Sengoku/Heat Mate

tank lifts out for easy filling, burns 10 to 12 hours per filling. Battery operated siphon pump with batteries included. UL listed. Unit size: 21-1/2" H. x 11-3/4" W. x 18-1/2" D.

Kerosene Heater - Heat Mate[™] radiant heater. 10,600 BTU per hour output. Heats up to 400 sq. ft. Lightweight and portable. Safety features such as automatic shutoff and safety grills to protect against burns. Convenience features like easy-to-read fuel gauges and automatic ignition for fast, push-button starting, and quality construction. 3.8 liter cartridge fuel

World Mktg.

Replacement Ignitor - An important component of correct heater operation. Model No. PW-10A ignitor-pins in opposite direction of heating coil. Model No. DH-31 ignitor-pins in same direction of heating coil. 1 per package.

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
457140-A	RF1140	Radiant heat with built-in fan blower	0/0/1	30.000	124.99 EA

NOTE: Sengoku Model No. HMHR1101 and RF1140 kerosene heaters use replacement wick model No. PW27.

Sengoku/Heat Mate

Kerosene Heater - Heat Mate™ heater convection 22,300 BTU

heater has a tank capacity of 1.9 gallon. Integral fuel tank. 3-way safety shutoff and special safety guards to prevent accidental contact burns. Easy-to-read fuel gauge. Includes manual siphon pump & 2 "D" cell batteries for automatic push-button ignition. Burning time: 12 hours. Heating area: 900 sq. ft. Dimensions: 18-3/4" circumference x 27" H. NOTE: Use replacement wick model No. PW62.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
429842-D	DH-30	Fits Aladdin*, Comfort Glow, Corona, Kero-Sun, Kero-Heat*, Kero World*, Sears, Toyotomi, etc.	1/0/6	.010	4.49 EA
433845-D	DH-31	Fits Amercian wick, Comfort Glo*, DuraHeat, DynaGlo, Enviro Temp*, Kero-World*, Robeson*, Sunbeam*, Turco, etc.	1/0/6	1.017	4.49 EA

*Varies by model.

Rutland Prod.

Furnace Cement - High-temperature cement formulated for installation and repair of wood and coal stoves, furnaces, and boilers. A multi-purpose cement for bonding and sealing both masonry and metals exposed to high temperatures up to 3000° F.

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
457124-A	HMHC2230	Kerosene Heater	0/0/1	31.000	129.99 EA

Sengoku/Heat Mate

Kerosene Heater - Heat Mate™ radiant heater. 10,000 BTU per hour

output. Heats up to 380 sq. ft. Compact and lightweight. Great for camping or emergency use. Safety features such as automatic shuf-off and safety grills to protect against burns. Convenience features like easy-to-read fuel gauges and automatic ignition for fast, push-button starting, and quality construction. 1.2 gallon fuel capacity, burns 12 to 14 hours per filling. UL listed. Unit size: 15" round, 23"



NOTE: Sengoku Model No. OR-77 kerosene heater uses replacement wick model No. PW77.

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
433888-B	OR-77	Kerosene Heater	0/0/1	15.000	109.99 EA

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
401666-D	FSC8	1/2 Pint	1/0/12	1.058	2.79 EA
401675-D	FSC16	Pint	1/0/12	1.926	3.99 EA
401951-D	FSC32	Quart	1/0/6	3.858	6.29 EA
402040-D	FSC64	1/2 Gallon	1/0/6	7.867	10.49 EA

WM Barr

Kerosene Alternative - Klean-Strip® Klean-Heat™ odorless heater

fuel. The perfect choice to use in place of K1 kerosene in kerosene burning appliances such as heaters, lamps, and stoves. This premium fuel is safer and more convenient to store than kerosene. It contains less sulfur and aromatics so it has No kerosene odor before, during, and after burning. The clear formula burns clean to extend the life of your wick and limit smoke, soot, and emissions. Klean-Heat™ is the superior choice for safe and odorless warmth this season. Meets or exceeds all K1 kerosene specifications.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
484628-B	GKKH99991	Kerosene Alternative	1/0/6	7.000	10.79 GAL

KEROSENE HEATER

Hy-C Co.

Unlined Stove Board - Can be used as a hearth extender to protect

the floor in front of a fireplace or as floor protection under a kerosene heater. Walnut woodgrain. 36" x 36"



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
496936-D	U3636WW-6	36x36 Unld Wg Stoveboard	0/0/6	5.583	22.99 EA

Hy-C Co.

Kerosene And Gas Heater Stove Board - Guards your floor against spills, splashing, overheating, and scratching. Woodgrain design. May be used under kerosene, oil, gas and

electric heaters. 1/2" thick.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
425486-D	K2432WW-6	24" x 32"	0/0/6	5.167	35.99 EA
425451-D	K2424WW-6	24" x 24"	0/0/6	5.000	31.49 EA

Hy-C Co.

UL Stove Board - Floor Protector or Wall Shield. Encased in each

floor guard panel is fire retardent class 1 or A mineral board. Constructed of bonderized steel. It features a raised edge to contain spilled oil, excess ash, or soot. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
410665-D	UL3242WW-1	Walnut woodgrain design, 32" x 42"	0/0/1	13.267	44.99 EA
431018-D	UL3636WW-1	Walnut woodgrain design, 36" x 36"	0/0/1	12.800	43.49 EA
437423-D	UL3652WW-1	Walnut woodgrain design, 36" x 52"	0/0/1	18.433	67.99 EA
400017-D	UL3652BP-1	Brick pattern design, 36" x 52"	0/0/1	18.433	67.99 EA
400025-D	UL3652BL-1	Black pebble grain design, 36" x 52"	0/0/1	18.433	67.99 EA

Rutland Prod.

Safe-T-Flue Chimney Cleaner - Specially formulated to combine with flue gases to change the chemical composition of creosote. Reduces the chance of chimney fires by turning existing creosote into a dry flaky compound. For stoves, fireplaces, or furnaces.

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
406287-D	97L	32 fl. oz. spray	1/0/6	2.500	12.49 EA
438949-D	WI-21124	1 lb. powder	1/0/24	1.173	7.79 EA
419586-D	WI-21212	2 lb. powder	1/0/12	2.178	13.49 EA
402389-D	WI-21250	5 lb. powder	1/0/6	5.333	26.49 EA

Desa International

Builders Woodburning Fireplace - Woodburning firebox is the perfect companion to Comfort Glow's vented or vent-free gas logs. Firebox includes: Cast-iron grate, wire mesh

Firebox includes: Cast-iron grate, wire mesh screen and refactory concrete liner with floor. The C series features heat circulating louvers, hidden screen pockets and a full brick liner.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
400462-B	B36L-M	B series 37-1/4" H. x 38" W. x 21-1/8" D.	0/0/1	192.000	189.99 EA
400480-В	CWC42C	C series 44-1/4" H. x 48" W. x 22-1/2" D.	0/0/1	226.000	289.99 EA

NOTE: You may cause a fire hazard if you do not use Desa components, which have been designed and tested for this fireplace system. This fireplace and its components are safe when installed according to the instruction manual.

England's Stove Works

Pellet Stove - Burns wood pellets. Heats up to 1500 sq. ft. 40 lb.

hopper with double auger system. Auto start 1 touch ignition. Window opening 8-1/2" x 8-1/2". Built-in blower system. Built-in air wash system for cleaner glass. Overall dimensions: 23" W. x 28" H. x 21" D. Rear vent flue size 3" I.D. EPA certified. Manufacturer recommends installing an outside air kit on all pellet stoves. Optional

brass trim and wall thermostat available from the manufacturer. **NOTE:** This pellet stove is approved for mobile home or doublewide installation with

outside combustion air hook-up.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
404805-B	55-SHP10	40lb Hopper Pellet Stove	0/0/1	290.000	1449.99 EA

HEATING/HVAC PELLET STOVE

England's Stove Works

Pellet Stove - Burns wood pellets. Heats up to 2200 sq. ft. 70 lb.

hopper with double auger system. Auto start 1 touch ignition. Brass louvers and window trim standard. Window opening 8-1/2" x 8-1/2". Built-in blower system. Built-in air wash system for cleaner glass. Overall dimensions: 28-1/4" W. x 30" H. x 28-1/2" D. Rear vent flue size 3" I.D. EPA certified. Manufacturer recommends installing an outside air kit on all pellet stoves. Optional brass trim and wall thermostat available from the manufacturer. **NOTE:** This pellet stove is approved for mobile home or doublewide installation with outside combustion air hook-up.



I I Ouuct	wig.	
No.	No.	

Continued From Previous Column

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
407045-D	16532	11" x 7" rectangular	0/0/1	.625	38.49 EA
425034-D	16533	12" x 8" rectangular	0/0/1	.650	39.49 EA

Rutland Prod.

Mfg. No.

PS-3

Rutland Prod.

Product

Pellet Stove Brush - Designed for cleaning pellet stove pipes. Heavy-duty ball tip guides brush through offsets and

bends. Worcester brand. Uses model No. 25P5 rod. 1/ 4-20 thread tip.

Description

connectors on 1 end and 1/4" coupling at the other.

For joining rod to brush or to other rods.

3" Pellet Stove Brush

Fiberglass Rod Kit - 3/8" diameter fiberglass rods. 1/4" pipe thread



Cost

15.79 EA

Weight

.500

1/0/4

Order

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
404841-B	55-SHP22	60lb Hopper Pellet Stove	0/0/1	375.000	2049.99 EA


England's Stove Works

Pellet Outside Air Kit - Provides outside air that is mandatory for most pellet installations. Easy, DIY installation. Expandable aluminum flex pipe expands to 6'. Complete through the wall installation kit includes: Aluminum flex hose, alumimum louver, inside wall plate, and outside wall plate hose clamps.

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
412440-B	PU-OAK	Outside Air Pellet Kit	0/0/1	3.000	62.99 EA

Rutland Prod.

Round Wire Chimney Brush - Single spiral brush. Wire filament with a 10-gauge spindle, and 1/4" pipe thread, plated, machined nipple.



Fiberglass Rod - 1/4" threaded rod on 1 end and 1/4" coupler at the

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
425258-D	16406	6"	1/0/4	1.083	15.49 EA
425409-D	16408	8"	1/0/4	1.333	17.99 EA

Rutland Prod.

Wire Chimney Brush - Single spiral brush. Wire filament with a 10-gauge spindle, and 1/4" pipe thread, plated, machined nipple.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
424102-D	16507	7" square	1/0/4	1.333	26.49 EA
426364-D	16508	8" square	1/0/4	1.500	26.99 EA
406992-D	16512	12" square	0/0/1	.750	39.49 EA
Cantinuod No.	d Caluman				

No.	No.	Description	Mult.	Weight	
425392-D	10624	4 Extension Rod	1/0/24	.552	

Plumb Shop


Mfa.

other. 48" long.

Product

Gas Log Gas Connector Kit - Gas log installation kit with ProCoat includes: (1) 24" coated gas connector, (1) 1/2" Male thread steel adapter, (1) 1/2" Female thread steel adapter, (1) 3/8" Male thread steel adapter,

(1) 3 mil. leak detection solution, (1) 3 mil.



,		

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
425793-B	PSC1079	Space Heater Kit	1/0/5	.900	14.99 EA

Unit Cost

8 29 FA

Rutland Prod.

High Heat Silicone Sealant - 500° F. heat resistant silicone sealant forms a tough, rubbery adhesive seal that withstands 450° F. continuously and 500° F. intermittently. Uses include: sealing fireplace inserts, stoves, flashings, solar panel repairs anywhere a black or translucent permanent elastic seal is needed. Adheres to most materials. Acetoxy cure. Meets ASTM C920-86. 10.5 oz. cartridge.



Desa International

Vent-Free Gas Pedestal Stove - The Comfort Glow® fireplace system includes: Full-size gas logs, dual burner, concealed controls, and brass trim. Yellow flames create a real wood fire appearance. Thermostat control automatically modulates heat output between



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
448966-D	76	Black	1/0/12	.833	9.79 EA
448974-D	76C	Translucent	1/0/12	.833	9.79 EA

Desa International

Outside Air Kit - Optional outside combustion kit for side wall installation. Kit includes 3' of flexible pipe, collars, and hood. Specifically designed for use only with Desa woodburning fireplace model No. CWB36C and CWC42C.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
400499-B	AK4	Outside Air Kit	0/0/1	1.500	16.79 EA

Desa International

Woodburning Fireplace Pipe - Double wall chimney pipe specifically designed for use only with Desa woodburning firebox. Each section consists of a galvanized outer pipe, a

stainless steel inner flue pipe, and a wire spacer. Snap lock design means you don't have to add screws to keep the chimney together.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
400756-B	12-8DM	12"	0/0/1	4.400	21.49 EA
400765-B	24-8DM	24"	0/0/1	7.700	31.49 EA
400845-B	36-8DM	36"	0/0/1	11.200	35.49 EA
400881-B	48-8DM	48"	0/0/1	14.800	41.49 EA

Desa International

Blower - Optional blower for Desa woodburning fireplace. Triple fan

blower with manual control On/Off switch. Fan is operated by pressing the rocker switch in the lower right hand corner of the fireplace face. Use with Desa model No. CWB36C and CWC42C fireplace boxes.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
401185-B	BK3	Variable Manual Blower	0/0/1	3.000	92.99 EA

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
490172-C	S26NTA	Natural gas	0/0/1	80.000	409.99 EA
490180-C	S26PTA	Propane gas	0/0/1	80.000	409.99 EA

Desa International

32" Vent-Free Gas Firebox - This circulating louvered firebox includes: Black hood, fiber ceramic brick liner, wire mesh

fireplace screen, and duplex outlet. Purchase the vent-free gas logs and oak stained mantel and base separately. Assembled product dimensions: 32-3/16" H. x 35-1/6" W. x 19-1/4"

20,000 to 26,000 BTU and pilot. Use optional

blower model No. 3750. Low installation cost. No venting required. Heats up to 700 sq. ft. 1/2" NPT gas connection. 28" H. x 27-1/4" W. x 17-1/4" D.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
490199-C	CGFB32CA	Vent-free Firebox	0/0/1	71.000	299.99 EA

Desa International

32" Mantel And Base - Mantel and base for 32" vent-free or electric

Desa firebox. Contains the unassembled mantel and base pieces and all necessary hardware.

brackets, and black trim. Medium oak finish.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
490202-C	GMC90FA	32" Mantle & Base	0/0/1	90.000	524.99 EA

NOTE 1: Banned in the State of California. If you live in the state of Arizona, Idaho, Nevada, New Mexico, North Dakota, Minnesota, South Dakota, or Washington; please check your local code authorities because restrictions on installing ventfree gas appliances may exist.

Desa International

Remote Control Ready Vent-Free Gas Log - Comfort Glow®

Biltmore split oak design. 24" full size logs with accents. Dual burner

provides dancing yellow flames even at the lowest setting. Variable manual controls allow the user to choose any heat setting between the lowest and highest and any flame height they desire by simply turning a control knob. Low 20,000 BTU and high 39,000 BTU. Heats 1300 sq. ft. Install in any masonry, UL listed, solid fuel burning fireplace or universal vent-free certified firebox. Allows you to operate the logs with the



fireplace damper closed. Concrete logs feature deep bark texture and realistic split areas. Can withstand temperatrues up to 2000° F. Refer to model No. CGHRCT4 for optional remote control.

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
490229-C	CCL3924NRA	Natural gas	0/0/1	66.000	424.99 EA
490237-C	CCL3924PRA	Propane gas	0/0/1	66.000	424.99 EA

Desa International

Remote Control - Optional hand-held remote control unit. Shows a

high to low temperature setting. Increase or decrease temperature setting. Allows burners to be turned On and Off. Shows current operation mode. For model No. CCL3924NRA and CCL3924PRA vent-free gas logs and model No. CHDV32NR and CTDV36NR direct-vent fireboxes.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
490245-C	HRC201-4	Fireplace Remote Control	1/0/4	2.000	134.99 EA

Can't Find It! Give Us a Call!

-Notes -