


# GRK Caliburn PH



PART #	SIZE	Head diameter (dk)	Head height (H)	Length (L)	Thread length (TL)	Shank diameter (ds)	Minor diameter (d1)	Major diameter (d2)
57828	1/4" X 1-3/4"	0.4724	0.1575	1.750	full	N/A	0.1719	0.2500
57831	1/4" X 2-1/4"			2.250				



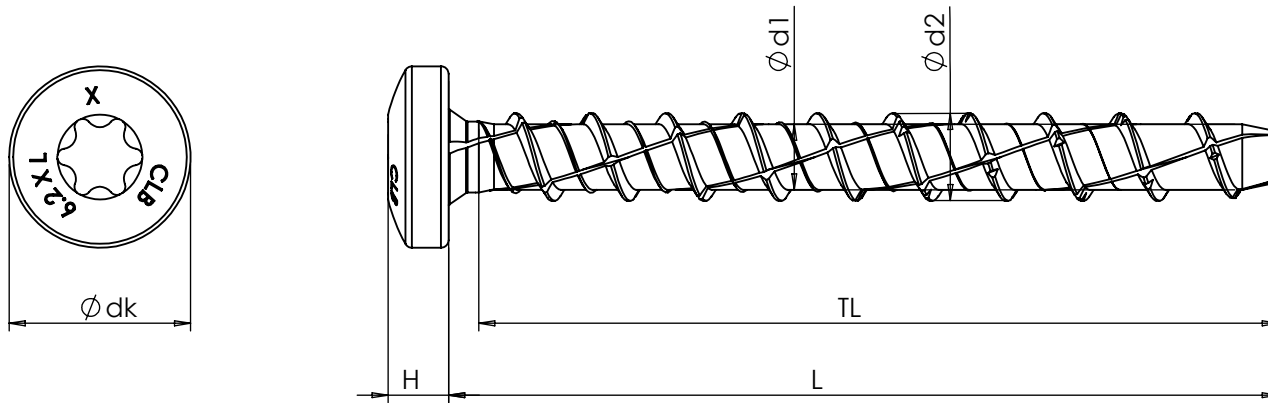

Dimensions are in inches without any manufacturing tolerances !

Predrilling with a 3/16inch diameter concrete drill bit required.

Has a T-30 Star drive.

**PROPRIETARY AND CONFIDENTIAL**  
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Illinois Tool Works Inc. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Illinois Tool Works Inc. IS PROHIBITED.

Distribution Record	Headmark		NAME	DATE	 
ITW			S.Ruhmann	MARCH 27-2015	
			CHECKED		
			ENG APPR.		
			MFG APPR.		
			Q.A.		955 National Parkway, Suite 95500 Schaumburg, IL 60173 USA
					DWG. NO. Sales Support Caliburn PH Screw
					REV. <b>0</b>
					Caliburn PH 1/4
					SHEET 1 OF 1