

Fastener Solutions Center



Index

Drywall to Metal	4
Scavenger head fine thread — drywall to light gauge metal attachment	4
 Bugle head fine thread — drywall to light gauge metal attachment 	4
Scavenger head drill point screws — drywall to heavy gauge metal attachment Puels head drill point attachment	4
Bugle head drill point — drywall to heavy gauge metal attachment	-
Drywall to Wood	5
 Scavenger head coarse thread — drywall to wood attachment Bugle head coarse thread screws — drywall to wood attachment 	5
Bugle head coarse thread screws — drywall to exterior wood attachment	5
 Bugle head laminator screws — drywall to drywall attachment 	5
Light Gauge Metal Framing	6
 Pan head Vector[™] point fine thread — metal to metal attachment 	6
Wafer head Vector™ point fine thread — metal to metal attachment Published Vector™ point fine thread — metal to metal attachment	6
 Bugle head Vector™ point fine thread — metal to metal attachment Wafer head sharp point — metal to metal attachment 	6
Wafer head fine thread — lath to wood or metal attachment	6
Metal Framing	7
Wafer head drill point — lath to metal attachment	7
Pan head drill point — metal to metal attachment	7
Hex head drill point — metal framing to metal attachment	7-8
Sheathing to Wood	8
Flat wafer head sharp point — cement sheathing to wood attachment	8
 Flat wafer head drill point — high density sheathing to wood attachment Flat wafer head LOX winged drill point — high density sheathing to metal attachment 	
Sheathing to Wood	8-9
Flat wafer head winged drill point — high density sheathing to metal attachment	9
Sheathing to Light Gauge Metal	9
Flat head PLYLOK® — plywood to light gauge metal fastener	9
Sheathing to Heavy Gauge Metal	9-10
Wafer head PLYLOK® winged pilot point — plywood sheathing to metal attachment	9
Wafer head PLYLOK® pilot drill point — plywood to metal attachment	9
Wafer head PLYLOK® winged drill point — plywood to metal attachment	9
Flat head PLYLOK® drill point — plywood to steel joist attachment Flat head PLYLOK® winged drill point — plywood to metal attachment	10 10
• Flat head PLYLOK® winged drill point — plywood to metal attachment	
Wood to Wood or Metal ■ Flat head PLYLOK® winged drill point — plywood to steel joist attachment	10 10
Trim head type 17 point — wood to light gauge metal or wood	10
 Trim head drill point — wood to metal or wood attachment 	10
Flat head woody — general interior wood construction	10
Flat head woody — exterior deck and fence wood construction	10
Interior Wood to Wood	11
Pan head cabinet screws — cabinets and general wood construction	11
Specialty Stainless Steel Screws	11
 Flat head coarse thread — deck and fence attachment Bugle head coarse thread — general wood to wood attachment 	11 11
Flat head coarse thread — deck and fence attachment	11
$lacktriangle$ Trim head fine thread Streaker $^{\otimes}$ — trim to wood or metal attachment	11
Wood to Wood Framing	12
Hex head Lag-Master™ — general wood to wood attachment	12
 Flat head star Tie-Master™ shank — timber attachment 	12
Drywall Nails	13
SuperDrive®	14-17
SuperDrive tools	14-15
Collated application chart for SuperDrive	16-17
Acoustical Products	18
Eye-lag screws — hanger wire attachment	18 18
Eye-lag adapter — ceiling attachment Eye-lag poles - ceiling attachment	18

CB Clips	18
Bits and Bit Holders	19
Abrasives	20
Grabber Rocker® Screw Drivers	20
Ramset® Powder Fastening Systems	21-22
Nitroset™ Fastening System	23
Ramset® Gas Fastening Systems	24
Aerosmith® Air Fastening Systems	25
Max® Air Compressor	26
Access Doors	26
Red Head® Mechanical Anchors	27
Red Head® Mechanical & Epoxy Anchors	28
Adhesives, Fire Caulk, Scaffold	29
Precision Lasers	30
Coatings and Finishes	31

About Grabber

GRABBER is a leading distributor of quality products built for construction professionals. For contractors quality is everything. Products must be 100% reliable and durable to meet the demands of an increasingly fast-paced and productivity-minded profession.

The construction industry rewards innovations that achieve real gains in efficiency, performance, and job quality. All GRABBER products must meet this high standard of excellence. Grabber engineers its fastener products to be superior to all other products in their class.

Grabber's core line of products include fasteners for a variety of wood, metal, drywall, sheathing, and acoustical applications. GRABBER fasteners are regarded as the best in the industry, punctuated by the fact that its competitors have had to duplicate Grabber fastener designs. GRABBER also distributes many other product lines for the commercial and residential construction industries as well, including proprietary construction equipment, drywall tools and materials, power drives, adhesives, and accessories.





"The Professional's Choice" $^{\text{\tiny TM}}$

Grabber Fastener Applications



Drywall to Metal

Scavenger® Head Streaker®



Attaches gypsum board to 25-20 ga. steel. Unique Scavenger® head helps reduce paper burrs.

LIGHT GAUGE METAL Drywall

- Scavenger® head
- Fine thread No. 2 Phillips

 Gray phosphat 	е
-----------------------------------	---

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
168\$	6 x 1-in	28-lb	10M	SCAVENGER HEAD, #2PHIL, FINE THREAD, GRAY PHOSPHATE
268\$	6 x 1-1/8-in	32-lb	10M	SCAVENGER HEAD, #2PHIL, FINE THREAD, GRAY PHOSPHATE
3685	6 x 1-1/4-in	30-lb	8M	SCAVENGER HEAD, #2PHIL, FINE THREAD, GRAY PHOSPHATE
468S	6 x 1-5/8-in	22-lb	5M	SCAVENGER HEAD, #2PHIL, FINE THREAD, GRAY PHOSPHATE

TYPICAL

SCAVENGER®







Grabber's unique Scavenger® head screws drive cleanly into drywall helping to reduce or eliminate paper burrs. As typical drywall screws are driven they tend to leave behind paper burrs. These paper burrs require more mud to cover and more sanding and finishing time, resulting in lost time and higher labor costs.

Bugle Head Streaker®



LIGHT GAUGE METAL Drywall

Attaches gypsum board to wood or 25-20 ga. steel. Standard bugle head.

- Bugle head

- Fine thread
 No. 2 Phillips
 Gray phosphate

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
168	6 x 1-in	29-lb	10M	BUGLE HEAD, #2PHIL, FINE THREAD, GRAY PHOSPHATE
268	6 x 1-1/8-in	32-lb	10M	BUGLE HEAD, #2PHIL, FINE THREAD, GRAY PHOSPHATE
368	6 x 1-1/4-in	30-lb	8M	BUGLE HEAD, #2PHIL, FINE THREAD, GRAY PHOSPHATE
468	6 x 1-5/8-in	22-lb	5M	BUGLE HEAD, #2PHIL, FINE THREAD, GRAY PHOSPHATE
768	6 x 2-in	22-lb	3.5M	BUGLE HEAD, #2PHIL, FINE THREAD, GRAY PHOSPHATE
868	7 x 2-1/4-in	20-lb	3M	BUGLE HEAD, #2PHIL, FINE THREAD, GRAY PHOSPHATE
968	8 x 2-1/2-in	20-lb	2.5M	BUGLE HEAD, #2PHIL, FINE THREAD, GRAY PHOSPHATE
1168	8 x 3-in	22-lb	2M	BUGLE HEAD, #2PHIL, FINE THREAD, GRAY PHOSPHATE
1268	10 x 3-1/2-in	17-lb	1M	BUGLE HEAD, #2PHIL, FINE THREAD, GRAY PHOSPHATE
1368	10 x 4-in	21-lb	1M	BUGLE HEAD, #2PHIL, FINE THREAD, GRAY PHOSPHATE
1468	10 x 4-1/2-in	23-lb	1M	BUGLE HEAD, #2PHIL, FINE THREAD, GRAY PHOSPHATE
1568	10 x 5-in	24-lb	1M	BUGLE HEAD, #2PHIL, FINE THREAD, GRAY PHOSPHATE
1768	10 X 6-in	28-lb	1M	BUGLE HEAD, #2PHIL, FINE THREAD, GRAY PHOSPHATE



LIGHT GAUGE METAL Drywall,

Attaches gypsum board to wood or 25-20 ga. steel. Standard bugle head.

- Bugle head
- · Fine thread
- No. 2 Phillips

•	Clear	Zinc

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
168Z	6 x 1-in	29-lb	10M	BUGLE HEAD, #2PHIL, FINE THREAD, CLEAR ZINC
268Z	6 x 1-1/8-in	32-lb	10M	BUGLE HEAD, #2PHIL, FINE THREAD, CLEAR ZINC
368Z	6 x 1-1/4-in	30-lb	8M	BUGLE HEAD, #2PHIL, FINE THREAD, CLEAR ZINC
468Z	6 x 1-5/8-in	22-lb	5M	BUGLE HEAD, #2PHIL, FINE THREAD, CLEAR ZINC
768Z	6 x 2-in	22-lb	3.5M	BUGLE HEAD, #2PHIL, FINE THREAD, CLEAR ZINC
968Z	8 x 2-1/2-in	20-lb	2.5M	BUGLE HEAD, #2PHIL, FINE THREAD, CLEAR ZINC
1168Z	8 x 3-in	22-lb	2M	BUGLE HEAD, #2PHIL, FINE THREAD, CLEAR ZINC

Scavenger® Head Driller





Unique Scavenger® head

HEAVY GAUGE METAL Drywall

Attaches gypsum, insulation board, wood, etc. to metal studs 20-14 ga. Unique Scavenger® head helps reduce paper burrs.

- Scavenger® head Drill point

- No. 2 Phillips
 Gray phosphate

	PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
	135	6 x 1-in	33-lb	10M	SCAVENGER HEAD, #2PHIL, DRILL POINT, PHOSPHATE
	135S	6 x 1-1/8-in	37-lb	10M	SCAVENGER HEAD, #2PHIL, DRILL POINT, PHOSPHATE
	14\$	6 x 1-1/4-in	33-lb	8M	SCAVENGER HEAD, #2PHIL, DRILL POINT, PHOSPHATE
	15\$	6 x 1-5/8-in	22-lb	5M	SCAVENGER HEAD, #2PHIL, DRILL POINT, PHOSPHATE
	165	6 x 1-7/8-in	26-lb	4M	SCAVENGER HEAD, #2PHIL, DRILL POINT, PHOSPHATE
	30SS	8 x 2-3/8-in	28-lb	3M	SCAVENGER HEAD, #2PHIL, DRILL POINT, PHOSPHATE
	30MS	8 x 2-5/8-in	20-lb	2M	SCAVENGER HEAD, #2PHIL, DRILL POINT, PHOSPHATE
Ξ	30LS	8 x 3-in	22-lb	2M	SCAVENGER HEAD, #2PHIL, DRILL POINT, PHOSPHATE





HEAVY GAUGE METAL Drywall

Attaches gypsum, insulation board, wood, etc. to metal studs 20-14 ga. Unique Scavenger® head helps reduce paper burrs.

- Scavenger® head Drill point
- No. 2 Phillips
- Clear zinc

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
13SZ	6 x 1-in	33-lb	10M	SCAVENGER HEAD, #2PHIL, DRILL POINT, CLEAR ZINC
135SZ	6 x 1-1/8-in	37-lb	10M	SCAVENGER HEAD, #2PHIL, DRILL POINT, CLEAR ZINC
14SZ	6 x 1-1/4-in	33-lb	8M	SCAVENGER HEAD, #2PHIL, DRILL POINT, CLEAR ZINC
15SZ	6 x 1-5/8-in	22-lb	5M	SCAVENGER HEAD, #2PHIL, DRILL POINT, CLEAR ZINC
16SZ	6 x 1-7/8-in	26-lb	4M	SCAVENGER HEAD, #2PHIL, DRILL POINT, CLEAR ZINC
30SSZ	8 x 2-3/8-in	28-lb	3M	SCAVENGER HEAD, #2PHIL, DRILL POINT, CLEAR ZINC
30MSZ	8 x 2-5/8-in	20-lb	2M	SCAVENGER HEAD, #2PHIL, DRILL POINT, CLEAR ZINC
30LSZ	8 x 3-in	22-lb	2M	SCAVENGER HEAD, #2PHIL, DRILL POINT, CLEAR ZINC

Bugle Head Driller





HEAVY GAUGE METAL Sheathing

Attaches sheathing, insulation board, wood, etc. to metal studs 20-14 ga. Standard bugle head.

- Bugle head
- Drill point
 No. 2 Phillips
 GrabberGard® gray

	PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
	14RG	6 x 1-1/4-in	33-lb	8M	Bugle HEAD, #2PHIL, DRILL POINT, GRABBERGARD
	15RG	6 x 1-5/8-in	22-lb	5M	Bugle HEAD, #2PHIL, DRILL POINT, GRABBERGARD
	16RG	6 x 1-7/8-in	26-lb	4M	Bugle HEAD, #2PHIL, DRILL POINT, GRABBERGARD
	30SRG	8 x 2-3/8-in	28-lb	3M	Bugle HEAD, #2PHIL, DRILL POINT, GRABBERGARD
-	30MRG	8 x 2-5/8-in	20-lb	2M	Bugle HEAD, #2PHIL, DRILL POINT, GRABBERGARD
	30LRG	8 x 3-in	22-lb	2M	Bugle HEAD, #2PHIL, DRILL POINT, GRABBERGARD

Drywall to Wood

Scavenger® Head Grabber®





Unique Scavenger® head Reduces paper burrs

INTERIOR WOOD Drywall

Attaches gypsum board to wood. Unique Scavenger® head helps reduce paper burrs.

- Scavenger® head
- Coarse thread
 No. 2 Phillips

•	Grav	pho	osp	hate

	PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
	108	6 x 1-in	28-lb	10M	SCAVENGER HEAD, #2PHIL, COURSE THREAD, GRAY PHOSPHATE
_	208	6 x 1-1/8-in	32-lb	10M	SCAVENGER HEAD, #2PHIL, COURSE THREAD, GRAY PHOSPHATE
	308	6 x 1-1/4-in	30-lb	8M	SCAVENGER HEAD, #2PHIL, COURSE THREAD, GRAY PHOSPHATE
-	408	6 x 1-5/8-in	22-lb	5M	SCAVENGER HEAD, #2PHIL, COURSE THREAD, GRAY PHOSPHATE
_	508	7 x 2-in	21-lb	3.5M	SCAVENGER HEAD, #2PHIL, COURSE THREAD, GRAY PHOSPHATE

Bugle Head GRABBER®





INTERIOR WOOD Drywall

Attaches gypsum board and wood to wood. Extra sharp point and threads make driving easier and provide better holding power.

- Bugle head

- Coarse thread No. 2 Phillips Gray phosphate

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
100	6 x 1-in	29-lb	10M	BUGLE HEAD, #2PHIL, COARSE THREAD, GRAY PHOSPHATE
200	6 x 1-1/8-in	32-lb	10M	BUGLE HEAD, #2PHIL, COARSE THREAD, GRAY PHOSPHATE
300	6 x 1-1/4-in	33-lb	8M	BUGLE HEAD, #2PHIL, COARSE THREAD, GRAY PHOSPHATE
400	6 x 1-5/8-in	22-lb	5M	BUGLE HEAD, #2PHIL, COARSE THREAD, GRAY PHOSPHATE
500	7 x 2-in	21-lb	3.5M	BUGLE HEAD, #2PHIL, COARSE THREAD, GRAY PHOSPHATE
600	7 x 2-1/4-in	20-lb	3M	BUGLE HEAD, #2PHIL, COARSE THREAD, GRAY PHOSPHATE
900	8 x 2-1/2-in	25-lb	2.5M	BUGLE HEAD, #2PHIL, COARSE THREAD, GRAY PHOSPHATE
1100	8 x 3-in	22-lb	2M	BUGLE HEAD, #2PHIL, COARSE THREAD, GRAY PHOSPHATE
1200	10 x 3-1/2-in	17-lb	1M	BUGLE HEAD, #2PHIL, COARSE THREAD, GRAY PHOSPHATE
1300	10 x 4-in	20-lb	1M	BUGLE HEAD, #2PHIL, COARSE THREAD, GRAY PHOSPHATE

INTERIOR WOOD General

Ideal for general purpose interior soft wood to wood applications. Extra sharp point and threads make driving easier and provide better holding power.

- Bugle head
- Coarse threadNo. 2 Phillips Yellow zinc

	PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
	100YZ	6 x 1-in	30-lb	10M	BUGLE HEAD, #2PHIL, COARSE THREAD, YELLOW ZINC
	300YZ	6 x 1-1/4-in	33-lb	8M	BUGLE HEAD, #2PHIL, COARSE THREAD, YELLOW ZINC
	400YZ	6 x 1-5/8-in	22-lb	5M	BUGLE HEAD, #2PHIL, COARSE THREAD, YELLOW ZINC
	500YZ	7 x 2-in	21-lb	3.5M	BUGLE HEAD, #2PHIL, COARSE THREAD, YELLOW ZINC
•	600YZ	7 x 2-1/4-in	20-lb	3M	BUGLE HEAD, #2PHIL, COARSE THREAD, YELLOW ZINC
	900YZ	8 x 2-1/2-in	25-lb	2.5M	BUGLE HEAD, #2PHIL, COARSE THREAD, YELLOW ZINC
	1100YZ	8 x 3-in	22-lb	2M	BUGLE HEAD, #2PHIL, COARSE THREAD, YELLOW ZINC
	1200YZ	10 x 3-1/2-in	30-lb	1.5M	BUGLE HEAD, #2PHIL, COARSE THREAD, YELLOW ZINC
	1300YZ	10 x 4-in	30-lb	1.M	BUGLE HEAD, #2PHIL, COARSE THREAD, YELLOW ZINC







EXTERIOR WOOD General

Attaches sheathing, insulation board, wood to wood. Standard bugle head.

Note: Staining may occur when using freshly cut lumber.

- Bugle head

- No. 2 Phillips
 GrabberGard® gray

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
100RG	6 x 1-in	30-lb	10M	BUGLE HEAD, #2PHIL, COARSE THREAD, GRABBERGARD
200RG	6 x 1-1/8-in	32-lb	10M	BUGLE HEAD, #2PHIL, COARSE THREAD, GRABBERGARD
300RG	6 x 1-1/4-in	33-lb	8M	BUGLE HEAD, #2PHIL, COARSE THREAD, GRABBERGARD
400RG	6 x 1-5/8-in	22-lb	5M	BUGLE HEAD, #2PHIL, COARSE THREAD, GRABBERGARD
500RG	7 x 2-in	21-lb	3.5M	BUGLE HEAD, #2PHIL, COARSE THREAD, GRABBERGARD
600RG	7 x 2-1/4-in	20-lb	3M	BUGLE HEAD, #2PHIL, COARSE THREAD, GRABBERGARD
900RG	8 x 2-1/2-in	25-lb	2.5M	BUGLE HEAD, #2PHIL, COARSE THREAD, GRABBERGARD
1100RG	8 x 3-in	22-lb	2M	BUGLE HEAD, #2PHIL, COARSE THREAD, GRABBERGARD
1200RG	10 x 3-1/2-in	17-lb	1M	BUGLE HEAD, #2PHIL, COARSE THREAD, GRABBERGARD
1300RG	10 x 4-in	20-lb	1M	BUGLE HEAD, #2PHIL, COARSE THREAD, GRABBERGARD

Drywall to Drywall

Bugle Head Drywall Laminator









LAMINATING Drywall

- Bugle head Coarse thread
- Gray phosphate

Lummules gypsom bourd. Hedry gubge minimul
screws are also ideal for wood to wood connection

- No. 2 Phillips

Laminates	gypsum b	oard. Heavy for wood to	y gauge	laminator
screws are	also ideal	for wood to	wood (connection.

LAMINATING Drywall Laminates gypsum board. Heavy gauge laminator

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
12 Z	10 x 1-1/2-in	37-lb	5M	BUGLE HEAD, #2PHIL, COARSE THREAD, CLEAR Zinc

DESCRIPTION

BUGLE HEAD, #2PHIL, COARSE THREAD, GRAY PHOSPHATE

WEIGHT QTY

37-lb

- screws are also ideal for wood to wood connection.
- Bugle head Coarse threadNo. 2 Phillips

Use with Grabber drywall adhesive, item number: GDWA

PART NO. SIZE

10 x 1-1/2-in

Use with Grabber drywall adhesive, item number: GDWA

Light Gauge Metal Framing

Pan Head Vector™ Point





- Faster seating
- ▶ Sharper/steeper angle point
- ▶ Faster penetration
- Better holding power

LIGHT GAUGE METAL Framing

Pan head Vector™ point fasteners are designed for exceptionally fast driving into 25-20 ga. steel. Unique grip-tight, high torque pan-head design.

- Pan head Fine thread
- Vector point
 No. 2 Phillips
- Gray phosphate

	PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
	23V	7 x 7/16-in	35-lb	15M	PAN HEAD, #2PHIL, VECTOR THREAD, PHOSPHATE
	PRO-FIT™ re for fewer cam	nouts.			Serrated under surface for better holding power
Steep-angled point drives up to 50% faster than traditional metal framing fasteners					Vector™ sharp point for faster starts and quick penetration

Wafer Head Vector™ Point





- Faster seating
- Sharper/steeper angle point
- Faster penetration
- Better holding power

LIGHT GAUGE METAL Framing

Wafer head Vector $^{\text{IM}}$ point fasteners are designed for exceptionally fast driving into 25-20 ga. steel. Attaches lath to light gauge metal.

- Wafer head
- Fine thread
- Vector point
 No. 2 Phillips
- Clear zinc

Steep-angled point drives up to 50% faster than traditional metal framing fasteners	_

PART NO. SIZE

7 x 9/16-in

31ZV





DESCRIPTION

SCAVENGER HEAD, #2PHIL, FINE THREAD, GRAY PHOSPHATE

WAFER HEAD, #2PHIL, FINE THREAD, GRABBERGARD

WAFER HEAD, #2PHIL, FINE THREAD, GRABBERGARD

WAFER HEAD, #2PHIL, FINE THREAD, GRABBERGARD

Scavenger® Head Vector™ Point



LIGHT GAUGE METAL Drywall

Attaches gypsum board to wood or 25-20 ga. steel. Unique Scavenger® head helps reduce paper burrs.

- Scavenger® head Fine thread No. 2 Phillips

- Gray phosphate

6 x 1-1/4-in * Also available in collation

PART NO. SIZE

8 x 9/16-in

8 x 1-1/4-in

8 x 1-in

32RG

33RG

37-lb

26-lb

31-lb

SIZE

WEIGHT QTY

30-lb

PART NO.

Grabber's new Vector™ screw significantly reduces drive time and increases productivity with its much sharper and steeper-angled point compared to traditional framing fasteners. Independent testing has demonstrated that Vector™ point screws drive up to eight times faster than IFI SAE J78 fastener penetration standards and 50% faster than competing fasteners. In a drive comparison with standard framing fasteners, the Vector™ performed considerably better across the board in multiple drive test comparisons.

Wafer Head Streaker®











LIGHT GAUGE METAL Framing

- Wafer head
- Fine thread
- No. 2 Phillips

Attacl and f		lath to wo	od or to	25-20	ga. stee	l studs

	31Z	8 x 9/16-in	37-lb	10M	WAFER HEAD, #2PHIL, FINE THREAD, CLEAR ZINC
	32Z	8 x 1-in	26-lb	5M	WAFER HEAD, #2PHIL, FINE THREAD, CLEAR ZINC
	33Z	8 x 1-1/4-in	31-lb	5M	WAFER HEAD, #2PHIL, FINE THREAD, CLEAR ZINC
	3138Z	8 x 1-1/2-in	21-lb	3M	WAFER HEAD, #2PHIL, FINE THREAD, CLEAR ZINC
-	3151Z	8 x 2-in	22-lb	2.5M	WAFER HEAD, #2PHIL, FINE THREAD, CLEAR ZINC

5M

5M

WEIGHT QTY DESCRIPTION

LIGHT GAUGE METAL Framina

Attaches metal lath to wood or to 25-20 ga. steel studs and framina.

- Wafer head
- Fine thread
- No. 2 Phillips GrabberGard® gray

PART N	IO. SIZE	WEIGHT	QTY	DESCRIPTION
3176Z	8 x 3-in	12-lb	1M	WAFER HEAD, #2PHIL, FINE THREAD, CLEAR ZINC
3151Z	8 x 2-in	22-lb	2.5M	WAFER HEAD, #2PHIL, FINE THREAD, CLEAR ZINC
3138Z	8 x 1-1/2-in	21-lb	3M	WAFER HEAD, #2PHIL, FINE THREAD, CLEAR ZINC

Metal Framing

Wafer Head Driller









Grabber's SuperPoint™ premium lathing and framing fasteners feature sharper threads and drill points and are designed to meet the most

HEAVY GAUGE METAL	Framing
	1

Attaches metal lath to 20-14 ga. steel studs and framina.

- Wafer head
- Drill point
- No. 2 Phillips Clear zinc

Super Point Type 3 Available in bulk. Part numbers: 234Z, 235Z, 236Z, 237Z, and 239Z

	PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
	34Z	8 x 1/2-in	27-lb	10M	WAFER HEAD, #2PHIL, DRILL POINT, CLEAR ZINC
	35Z	8 x 1-in	27-lb	5M	WAFER HEAD, #2PHIL, DRILL POINT, CLEAR ZINC
	36Z	8 x 1-1/4-in	32-lb	5M	WAFER HEAD, #2PHIL, DRILL POINT, CLEAR ZINC
	37Z	8 x 1 5/8-in	32-lb	4M	WAFER HEAD, #2PHIL, DRILL POINT, CLEAR ZINC
	39Z	8 x 3-in	31-lb	1M	WAFER HEAD, #2PHIL, DRILL POINT, CLEAR ZINC
6	234Z	8 x 1/2-in	27-lb	10M	WAFER HEAD, #2PHIL, SUPER POINT, CLEAR ZINC
6	235Z	8 x 1-in	27-lb	5M	WAFER HEAD, #2PHIL, SUPER POINT, CLEAR ZINC
5	236Z	8 x 1-1/4-in	32-lb	5M	WAFER HEAD, #2PHIL, SUPER POINT, CLEAR ZINC
छ	238Z	8 x 2-1/2-in	31-lb	2.5M	WAFER HEAD, #2PHIL, SUPER POINT, CLEAR ZINC
U	234Z10CW	10 x 3/4-in	34-lb	5M	WAFER HEAD, #2PHIL, SUPER POINT, CLEAR ZINC
O	236Z10CW	10 x 1-1/4-in	34-lb	5M	WAFER HEAD, #2PHIL, SUPER POINT, CLEAR ZINC
O [234Z12CW	12 x 3/4-in	34-lb	5M	WAFER HEAD, #2PHIL, SUPER POINT, CLEAR ZINC

DESCRIPTION

DESCRIPTION

DESCRIPTION

DESCRIPTION

DESCRIPTION

HEX HEAD, FINE THREAD, CLEAR ZINC

PAN HEAD, #2PHIL, DRILL POINT, BLACK PHOSPHATE

Pan Head Driller









HEAVY GAUGE METAL Fram	ir
------------------------	----

Framing screw for 20-14 ga.

- Pan head
- Drill point
 No. 2 Phillips
- · Clear zinc

HEAVY GAUGE METAL Framing	PART NO.	SIZE

PART NO.

19Z

20Z

19

PART NO.

PART NO.

PART NO.

25Z

Ü 10058P3 SIZE

6 x 7/16-in

8 x 1/2-in

10 x 5/8-in

6 x 7/16-in

SIZE

SIZE

SIZE

8 x 9/16-in

WEIGHT QTY

WEIGHT QTY

10M

7.5M

33-lb

38-lb

38-lb

Framing screw for 20-14 ga.

- Pan head
- Drill point

• Pan head Drill point • No. 2 LOX® Yellow zinc

• Pan head • Drill point • No. 2 LOX® · Clear zinc

- No. 2 Phillips
- Gray phosphate

Heavy Gauge Metal Framing - Self Drilling Screws

Flat Pan Head Driller







HEAVY GAUGE METAL Framina

Flat pan head drill point fasteners designed for attaching 20-14 ga. steel. LOX recess for better driving performance. Unique grip-tight, high torque pan head design.

- FP101875LYZ 10-18 x 3/4-in 42-lb 8M FLAT PAN HEAD, LOX 2, YELLOW ZING FP102275LYZ 10-22 x 3/4-in 44-lb FLAT PAN HEAD, LOX 2, YELLOW ZINC

WEIGHT QTY







HEAVY GAUGE METAL Framing

Flat pan head drill point fasteners designed for attaching 20-14 ga. steel. LOX recess for better driving performance. Unique grip-tight, high torque pan head design.

- FP121878JBWZ 12-18 x 7/8-in 44-lb FP1218125JBWZ 12-18 x 1-1/4-in 44-lb 3.5M
- FLAT PAN HEAD, LOX 2, CLEAR ZINC FLAT PAN HEAD, LOX 2, CLEAR ZINC

WEIGHT QTY

WEIGHT QTY

33-lb

Hex Head Streaker®









LIGHT GAUGE METAL Framina

High-torque washer head for fast framing and sheet metal work in 25-20 ga. Use 1/4-in nut setter.

- Hex head
- Fine thread Clear zinc

Hex Head Driller







GrabberGard®

HEAVY GAUGE METAL Framing

Attaches fixtures, backup plates, door frames and lathers channel to structural studs, metal checks, etc. in 20-14 ga.

- Hex head
- Drill point GrabberGard

WEIGHT QTY PART NO. SIZE DESCRIPTION 10075H3RG 10 x 3/4-in 34-lb 5M 12 GAUGE HEX HEAD DRILLER, GRABBERGARD 35-lb 0 12075H3RG 12 x 1-1/2-in 12 GAUGE HEX HEAD DRILLER, GRABBERGARD 1224150H4RG 12-24 x 1-1/2-in 33-lb 12 GALIGE HEX HEAD DRILLER GRARRERGARD 2 5M 1224200H4RG 12-24 x 2-in 12 GAUGE HEX HEAD DRILLER, GRABBERGARD

Hex Head Driller

HEAVY GAUGE METAL Genera Attaches fixtures, backup plates, door frames and lathers channel to structural studs in 20-14 ga.

- Hex head
- Drill point
- Clear zinc

HYDROGEN EMBRITTLEMENT



Grabber's 10, 12 & 14 gauge zinc-plated drill point fasteners are manufactured in ISO 9002 factories, plated as prescribed in the ASTM F1941-10 Standard Specification for Electrodeposited

Coatings on threaded fasteners, and post-plating baked according to the process articulated in SAE AMS 2759/9, Hydrogen Embrittlement Relief (Baking) of Steel Parts, Section 3.3.3.1, and SAE J78, which calls for a four-hour minimum time (the duration between the end of acid exposure and the beginning of the heating cycle in the baking furnace) for baking out entrapped hydrogen after acid treating the parts. The baking process may take from 3 to 23 hours at 375° to 425°, depending on the materials used and the plating's or finishes applied.

Grabber's 10, 12 & 14 gauge drill point fasteners are also tested for hydrogen embrittlement by benchmarks outlined in ASME B18.6.4, section 2.9.1.4, Hydrogen Embrittlement Test, and the SAE J78 4.4.1 Hydrogen Embrittlement Test Criteria, under protocols articulated in ASME B18.18.2 Inspection and Quality Assurance for High-Volume Machine Assembly Fasteners

ıl	PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
rs _	08050H3	8 x 1/2-in	37-lb	10M	8 GAUGE HEX HEAD DRILLER, CLEAR ZINC
-	08058H3	8 x 5/8-in	37-lb	10M	8 GAUGE HEX HEAD DRILLER, CLEAR ZINC
	08075H3	8 x 3/4-in	42-lb	10M	8 GAUGE HEX HEAD DRILLER, CLEAR ZINC
	08100H3	8 x 1-in	38-lb	7.5M	8 GAUGE HEX HEAD DRILLER, CLEAR ZINC
_	08125H3	8 x 1-1/4-in	35-lb	5M	8 GAUGE HEX HEAD DRILLER, CLEAR ZINC
	08200H3	8 x 2-in	33-lb	3M	8 GAUGE HEX HEAD DRILLER, CLEAR ZINC
U	10050H3	10 x 1/2-in	34-lb	5M	10 GAUGE HEX HEAD DRILLER, CLEAR ZINC
U	10058H3	10 x 5/8-in	41-lb	7.5M	10 GAUGE HEX HEAD DRILLER, CLEAR ZINC
o .	10075H3	10 x 3/4-in	30-lb	5M	10 GAUGE HEX HEAD DRILLER, CLEAR ZINC
o	10100H3	10 x 1-in	37-lb	5M	10 GAUGE HEX HEAD DRILLER, CLEAR ZINC
o	10125H3	10 x 1-1/4-in	33-lb	5M	10 GAUGE HEX HEAD DRILLER, CLEAR ZINC
Ū٠	10150H3	10 x 1-1/2-in	35-lb	3.5M	10 GAUGE HEX HEAD DRILLER, CLEAR ZINC
U.	10200H3	10 x 2-in	31-lb	3M	10 GAUGE HEX HEAD DRILLER, CLEAR ZINC
Ü	12075H3	12 x 3/4-in	40-lb	5M	12 GAUGE HEX HEAD DRILLER, CLEAR ZINC
Φ.	12100H3	12 x 1-in	40-lb	3.5M	12 GAUGE HEX HEAD DRILLER, CLEAR ZINC
Φ.	12125H3	12 x 1-1/4-in	34-lb	3.5M	12 GAUGE HEX HEAD DRILLER, CLEAR ZINC
Φ.	12150H3	12 x 1-1/2-in	35-lb	3.5M	12 GAUGE HEX HEAD DRILLER, CLEAR ZINC
O	12200H3	12 x 2-in	32-lb	3.5M	12 GAUGE HEX HEAD DRILLER, CLEAR ZINC
Ø.	12250H3	12 x 2-1/2-in	30-lb	1.5M	12 GAUGE HEX HEAD DRILLER, CLEAR ZINC
U _	12300H3	12 x 3-in	22-lb	1M	12 GAUGE HEX HEAD DRILLER, CLEAR ZINC
Φ.	12350H3	12 x 3-1/2-in	21-lb	1M	12 GAUGE HEX HEAD DRILLER, CLEAR ZINC
Ф	14075H3	14 x 3/4-in	61-lb	5M	14 GAUGE HEX HEAD DRILLER, CLEAR ZINC
Φ.	14100H3	14 x 1-in	52-lb	3.5M	14 GAUGE HEX HEAD DRILLER, CLEAR ZINC
O .	14125H3	14 x 1-1/4-in	35-lb	2M	14 GAUGE HEX HEAD DRILLER, CLEAR ZINC
Ü	14150H3	14 x 1-1/2-in	33-lb	2M	14 GAUGE HEX HEAD DRILLER, CLEAR ZINC
Ü	14200H3	14 x 2-in	34-lb	1.5M	14 GAUGE HEX HEAD DRILLER, CLEAR ZINC
O	14250H3	14 x 2-1/2-in	33-lb	2M	14 GAUGE HEX HEAD DRILLER, CLEAR ZINC
O	14300H3	14 x 3-in	22-lb	2M	14 GAUGE HEX HEAD DRILLER, CLEAR ZINC
O	14400H4	14 x 4-in	21-lb	.5M	14 GAUGE HEX HEAD DRILLER, CLEAR ZINC
O	122478H4	12-24 x 7/8-in	50-lb	3.5M	12-24 GAUGE HEX HEAD DRILLER, CLEAR ZINC
U	1224125H4	12-24 x 1-1/4-in	50-lb	3.5M	12-24 GAUGE HEX HEAD DRILLER, CLEAR ZINC

Sheathing to Wood, Light or Heavy Gauge Metal

Flat Wafer Head







GrabberGard® 15

 EMER	II ROAKD	Sheathing

Attaches cement board to light gauge metal (25-20 ga.) or wood. Features a .40 diameter head and GrabberGard® exterior coating.

- Flat wafer head ASTM B117 1500 hours
- Alternating threadNo. 2 Phillips
- GrabberGard

GCB8125HL	8 x 1-1/4-in	37-lb	5M	FLAT WAFER HEAD, #2PHIL, ALT THREAD, GRABBERGARD
GCB8158HL	8 x 1-5/8-in	31-lb	4M	FLAT WAFER HEAD, #2PHIL, ALT THREAD, GRABBERGARD
GCB8238HL	8 x 2-3/8-in	31-lb	2M	FLAT WAFER HEAD, #2PHIL, ALT THREAD, GRABBERGARD
GCB10350HL	10 x 3-1/2-in	31-lb	2M	FLAT WAFER HEAD, #2PHIL, ALT THREAD, GRABBERGARD

PART NO. SIZE WEIGHT QTY DESCRIPTION

SIZE

SIZE

8 x 1-1/4-in

8 x 1-5/8-in GHS8238LG 8 x 2-3/8-in

SIZE

8 x 1-1/4-in

8 x 1-5/8-in

8 x 2-3/8-in

WEIGHT QTY

WEIGHT QTY

5M

4M

26-lb

25-lb

31-lb

26-lh

27-lb

5M

3M

PART NO.

GHS8114LG

GHS8158LG

PART NO.

GH8114LG

GH8158LG

GH8238LG

Flat Wafer Head









Attaches cement board to steel. Features a .40 diameter head and GrabberGard® exterior coating.

CEMENT BOARD Sheathing

- Flat wafer head ASTM B117 1500 hours
- **Drill point**
- No. 2 Phillips GrabberGard

	.,				
	GCB8125SD	8 x 1-1/4-in	29-lb	5M	FLAT WAFER HEAD, #2PHIL, SELF DRILL, GRABBERGARD
Ī	GCB8158SD	8 x 1-5/8-in	29-lb	4M	FLAT WAFER HEAD, #2PHIL, SELF DRILL, GRABBERGARD
	GCB8238SD	8 x 2-3/8-in	29-lb	3M	FLAT WAFER HEAD, #2PHIL, SELF DRILL, GRABBERGARD
Ξ	GCB10350SD	8 x 3-1/2-in	29-lb	3M	FLAT WAFER HEAD, #2PHIL, SELF DRILL, GRABBERGARD

DESCRIPTION

DESCRIPTION

FLAT WAFER HEAD, #2LOX, FINE THREAD, GRABBERGARD

FLAT WAFER HEAD, #2LOX, FINE THREAD, GRABBERGARD

FLAT WAFER HEAD. #2LOX. FINE THREAD. GRABBERGARD

FLAT WAFER HEAD, #2LOX, WINGED DRILLER, GRABBERGARD

FLAT WAFER HEAD, #2LOX, WINGED DRILLER, GRABBERGARD

FLAT WAFER HEAD, #2LOX, WINGED DRILLER, GRABBERGARD

WEIGHT QTY DESCRIPTION

Flat Wafer Head









Attaches high density sheathing to light gauge metal (25-20 ga.) or wood. Features 3.75 diameter head and GrabberGard® exterior coating.

HIGH DENSITY Sheathing

- Flat wafer head
- Fine thread
- ard

GrabberGard®		• No. 2 LOX • GrabberG
--------------	--	---------------------------

Flat Wafer Head











HIGH DENSITY Sheathing

Attaches high density sheathing and fiber cement vertical siding to heavy gauge metal. Features a .375 diameter head and GrabberGard® exterior coating.

- Flat wafer head
- Winged drill point
 No. 2 LOX® **GrabberGard®**

GRABBER

"The Professional's Choice"

Flat Wafer Head Winged Driller





HIGH DENSITY Sheathing

Attaches high density sheathing to steel. Features a .375 diameter head and GrabberGard® exterior

- Flat wafer head
- Winged drill point
- No. 2 Phillips GrabberGard®

81585DW 8 x 1-5/8-in 27-lh 4M FLAT WAFER HEAD #2PHIL WINGED DRILLER GRARRERG	8125SDW 8 x 1-1/4-ir	27-lb 5M	FLAT WAFER HEAD, #2PHIL, WINGED DRILLER, GRABBERGARD
TENT TENT TENT TENT TENT TENT TENT TENT	8158SDW 8 x 1-5/8-ir	27-lb 4M	FLAT WAFER HEAD, #2PHIL, WINGED DRILLER, GRABBERGARD

Plywood to Light Gauge Metal

PLYLOK® Flat Head





PLYLOK applications:

- ▶ Plywood to 25-20 gauge steel framing
- Plywood sheathing to 22 gauge steel deck
- ▶ Dense board to light gauge steel

LIGHT GAUGE METAL Sheathing

"The miracle fastener™" Attaches and countersinks plywood to 25-20 gauge steel.

- Flat head PLYLOK® threaded point
- No. 2 Phillips
- Yellow zinc
 - ▶ Slatwall to 25-20 gauge steel studs
 - ▶ OSB & FRP to 25-20 gauge steel studs

Sheathing to Heavy Gauge Metal

PLYLOK® Wafer Head







PLYLOK® Wafer Head







GrabberGard®

HEAVY GAUGE METAL Sheathing

PART NO.

101716W3

PART NO.

PART NO.

PART NO.

PART NO.

P8516F3

P81516F3

10158W4

101716

SIZE

SIZE

SIZE

SIZE

10 x 1-5/8-in

SIZE

8 x 1-5/16-in

8 x 1-15/16-in

10 x 1-7/16-in 39-lb

101716W3RG 10 x 1-7/16-in

10 x 1-7/16-in

WEIGHT QTY

WEIGHT QTY

WEIGHT QTY

WEIGHT QTY

WEIGHT QTY

31lb

4M

39-lb

39-lb

39-lb

Attaches 3/16-in to 3/4-in plywood to 20-14 gauge metal.

- Thin wafer head
- No. 3 winged drill point No. 2 Phillips

HEAVY GAUGE METAL Sheathing

Attaches 3/16-in to 3/4-in plywood to 20-14 gauge metal.

- Thin wafer head
- No. 3 winged drill point
 No. 2 Phillips
 GrabberGard®

HEAVY GAUGE METAL Sheathing

Attaches 3/16-in to 3/4-in plywood to 20-14 gauge metal.

- Thin wafer headNo. 3 pilot drill pointNo. 2 Phillips
- GrabberGard





PLYLOK® Flat Head



HEAVY GAUGE METAL Sheathing

HEAVY GAUGE METAL Sheathing

Attaches 3/16-in to 3/4-in plywood to 20-14 gauge metal.

Attaches 3/8-in to 1-in plywood to steel joist 20-14 gauge.

Flat head

Clear zinc

No. 3 pilot drill point No. 2 Phillips

Thin wafer headNo. 4 winged drill pointNo. 2 Phillips

- Clear zinc

PART NO.	SIZE	WEIGHT	QII	DESCRIPTION		
GPLY150	7 x 1-1/2-in	35-lb	7.5M	FLAT HEAD, #2 PHILLIPS RECESS, YELLOW ZINC		
GPLY200	7 x 2-in	31-lb	5M	FLAT HEAD, #2 PHILLIPS RECESS, YELLOW ZINC		
GPLY275	7 x 2-3/4-in	25-lb	7.5M	FLAT HEAD, #2 PHILLIPS RECESS, YELLOW ZINC		
* Also available in 1-lb and 5-lb						

DESCRIPTION

DESCRIPTION

DESCRIPTION

DESCRIPTION

DESCRIPTION

WAFER HEAD WINGED 3PT DRILLER, #2PHIL, CLEAR ZINC

WAFER HEAD WINGED 3PT DRILLER, #2PHIL, GRABBERGARD

WAFER HEAD PILOT 3 PT DRILLER, #2PHIL, CLEAR ZINC

WAFER HEAD PILOT 4 PT WINGED DRILLER, #2PHIL, CLEAR ZINC

FLAT HEAD PILOT POINT DRILLER, #2PHIL, 3 PT, CLEAR ZINC

FLAT HEAD PILOT POINT DRILLER, #2PHIL, 3 PT, CLEAR ZINC

GRABBER

"The Professional's Choice"

PLYLOK® Flat Head







Attaches 1-in or thicker, plywood to 14-8 gauge metal.

- Flat head No. 3 winged drill point No. 3 Phillips

•	C	ear	7in	

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
12200FW3	12 x 2-in	33-lb	2M	FLAT HEAD WINGED DRILLER, #3PHIL, T-3 PT, CLEAR ZINC
12250FW3	12 x 2-1/2-in	30-lb	1.5M	FLAT HEAD WINGED DRILLER, #3PHIL, T-3 PT, CLEAR ZINC
14275FW3	14 x 2-3/4-in	33-lb	1M	FLAT HEAD WINGED DRILLER, #3PHIL, T-3 PT, CLEAR ZINC





	V CAI	CE ME	TAL She	
	7 1741	1172 11112	IAI SHA	
7.			IME JIIU	ummy

Attaches 1-in or thicker, plywood to 14-8 gauge metal.

- Flat head
- No. 3 winged drill point
 No. 3 Phillips
 GrabberGard®

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
12200FW3RG	12 x 2-in	33-lb	2M	FLAT HEAD WINGED DRILLER, #3PHIL, T-3 PT, GRABBERGARD
12250FW3RG	12 x 2-1/2-in	30-lb	1.5M	FLAT HEAD WINGED DRILLER, #3PHIL, T-3 PT, GRABBERGARD
12275FW3RG	12 x 2-3/4-in	30-lb	1M	FLAT HEAD WINGED DRILLER, #3PHIL, T-3 PT, GRABBERGARD

Wood to Wood or Metal

Trim Head Streaker®





Attaches interior wood to light gauge metal and wood. Streaker point means quick and easy penetration while the smaller, less noticeable head provides a finished look.

LIGHT GAUGE METAL Trim

- Trim head
- No. 1 square recess
 Gray phosphate

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
17\$100	7 x 1-in	29-lb	10M	TRIM HEAD, #1SQ, FINE THREAD, GRAY PHOSPHATE
17S	7 x 1-5/8-in	49-lb	10M	TRIM HEAD, #1SQ, FINE THREAD, GRAY PHOSPHATE
185	7 x 2-1/4-in	34-lb	5M	TRIM HEAD, #1SQ, FINE THREAD, GRAY PHOSPHATE
17576	8 x 3-in	21-lb	2M	TRIM HEAD, #1SQ, FINE THREAD, GRAY PHOSPHATE

Trim Head Driller





HEAVY GAUGE METAL Trim

Attaches wood trim over single or double layer gypsum board to 20-14 ga. steel.

- Trim head
- Drill point
- No. 1 square recess
- Gray phosphate

	PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
	17SD	7 x 1-5/8-in	28-lb	5M	TRIM HEAD, #1SQ, DRILL POINT, GRAY PHOSPHATE
Ī	18SD	7 x 2-1/4-in	29-lb	4M	TRIM HEAD, #1SQ, DRILL POINT, GRAY PHOSPHATE
	17SD76	8 x 3-in	22-lb	2M	TRIM HEAD, #1SQ, DRILL POINT, GRAY PHOSPHATE

Flat Head Wood Screws





INTERIOR WOOD General

Clear zinc coated screws for interior projects such as cabinets, paneling, furniture, wood framing, stairs, wood trim & more.

- Flat head
- Coarse thread
- No. 2 square recess
- Clear zinc

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
78100Z	8 x 1-in	30-lb	8M	FLAT HEAD, #2SQ, COARSE THREAD, CLEAR ZINC
78118Z	8 x 1-1/8-in	31-lb	6M	FLAT HEAD, #2SQ, COARSE THREAD, CLEAR ZINC
78125Z	8 x 1-1/4-in	32-lb	6M	FLAT HEAD, #2SQ, COARSE THREAD, CLEAR ZINC
78150Z	8 x 1-1/2-in	31-lb	5M	FLAT HEAD, #2SQ, COARSE THREAD, CLEAR ZINC
78175Z	8 x 1-3/4-in	28-lb	4M	FLAT HEAD, #2SQ, COARSE THREAD, CLEAR ZINC
78200Z	8 x 2-in	25-lb	3M	FLAT HEAD, #2SQ, COARSE THREAD, CLEAR ZINC
78250Z	9 x 2-1/2-in	27-lb	2.5M	FLAT HEAD, #2SQ, COARSE THREAD, CLEAR ZINC
78300Z	9 x 3-in	26-lb	2M	FLAT HEAD, #2SQ, COARSE THREAD, CLEAR ZINC
78350Z	10 x 3-1/2-in	19-lb	1M	FLAT HEAD, #2SQ, COARSE THREAD, CLEAR ZINC
78400Z	10 x 4-in	21-lb	1M	FLAT HEAD, #2SQ, COARSE THREAD, CLEAR ZINC



INTERIOR WOOD General

Yellow zinc coated screws for interior projects such as cabinets, paneling, furniture, wood framing, stairs,

- Flat head
- Coarse thread No. 2 square recess
- Yellow zinc

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
78200YZ	8 x 2-in	25-lb	3M	FLAT HEAD, #2SQ, COARSE THREAD, YELLOW ZINC
78250YZ	9 x 2-1/2-in	27-lb	2.5M	FLAT HEAD, #2SQ, COARSE THREAD, YELLOW ZINC
78275YZ	9 x 2-3/4-in	27-lb	2M	FLAT HEAD, #2SQ, COARSE THREAD, YELLOW ZINC
78300YZ	9 x 3-in	26-lb	2M	FLAT HEAD, #2SQ, COARSE THREAD, YELLOW ZINC
78350YZ	10 x 3-1/2-in	19-lb	1M	FLAT HEAD, #2SQ, COARSE THREAD, YELLOW ZINC







EXTERIOR WOOD General

GrabberGard exterior grade coated screws for deck and fence attachment and general exterior wood construction to wood.

- Flat head
- Coarse thread
- No. 2 square recess GrabberGard®

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
78125RG	8 x 1-1/4-in	32-lb	6M	FLAT HEAD, #2SQ, COARSE THREAD, GRABBERGUARD
78150RG	8 x 1-1/2-in	31-lb	5M	FLAT HEAD, #2SQ, COARSE THREAD, GRABBERGUARD
78175RG	8 x 1-3/4-in	28-lb	4M	FLAT HEAD, #2SQ, COARSE THREAD, GRABBERGUARD
78200RG	8 x 2-in	25-lb	3M	FLAT HEAD, #2SQ, COARSE THREAD, GRABBERGUARD
78250RG	9 x 2-1/2-in	27-lb	2.5M	FLAT HEAD, #2SQ, COARSE THREAD, GRABBERGUARD
78300RG	9 x 3-in	26-lb	2M	FLAT HEAD, #2SQ, COARSE THREAD, GRABBERGUARD
78350RG	10 x 3-1/2-in	19-lb	1M	FLAT HEAD, #2SQ, COARSE THREAD, GRABBERGUARD
78400RG	10 x 4-in	21-lb	1M	FLAT HEAD, #2SQ, COARSE THREAD, GRABBERGUARD

Interior Wood to Wood

Pan Head Cabinet Screws



Pan head screw used for joining together cabinet face frames. Type 17 point provides easy penetration and minimal expansion of material leaving a smooth flush

INTERIOR WOOD Cabinet

- Pan head
- Type 17 point
 No. 2 square recess
 Gray phosphate

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION	
902Q4	6 x 1-1/4-in	24-lb	10M	PAN HEAD STREAKER, #2 SQUARE, TP17 POINT, PHOSPHATE	
902Q	6 x 1-1/2-in	44-lb	5M	PAN HEAD STREAKER, #2 SQUARE, TP17 POINT, PHOSPHATE	

DESCRIPTION

DESCRIPTION

DESCRIPTION

DESCRIPTION

PAN HEAD STREAKER, #2 PHILLIPS, TP17 POINT, PHOSPHATE

PAN HEAD STREAKER, #2 PHILLIPS, TP17 POINT, PHOSPHATE

BUGLE HEAD WOOD SCREW, #2SQ, TP17, 302 S/STEEL

BUGLE HEAD WOOD SCREW, #2SO, TP17, 302 S/STEEL

BUGLE HEAD WOOD SCREW, #2SQ, TP17, 302 S/STEEL

BUGLE HEAD WOOD SCREW, #2PHIL, TP17, 302 S/STEEL

BUGLE HEAD WOOD SCREW, #2PHIL, TP17, 302 S/STEEL

BUGLE HEAD WOOD SCREW, #2PHIL, TP17, 302 S/STEEL

FLAT HEAD, STAR 25 RECESS, 305 S/STEEL, QUICKGRAB



INTERIOR WOOD Cabinet

PART NO.

PART NO.

10200SSQ

10250SSQ

10300SSQ

PART NO.

10200SS

1025059

1030055

PART NO.

GTST400

90-4

90

SIZE

6 x 1-1/4-in

6 x 1-1/2-in

SIZE

10 x 2-in

10 x 3-in

SIZE

10 x 2-in

10 x 3-in

SIZE

10 x 4-in

10 x 2-1/2-in

10 x 2-1/2-in

WEIGHT QTY

WEIGHT QTY

WEIGHT QTY

WEIGHT QTY

22-lb

36-lb

26-lb

22-lb

3.5M

2.5M

2.5M

2M

36-lb

26-lb

22-lb

10M

5M

44-lb

24-lb

Pan head screw used for joining together cabinet face frames. Type 17 point provides easy penetration and minimal expansion of material leaving a smooth flush

- Pan head

- Type 17 point
 No. 2 Phillips recess
 Gray phosphate

Stainless Steel

302 S/Steel Bugle Head Screw







302 stainless steel

|--|

30

- Bugle head


- Type 17 point
 No. 2 square recess
 302 stainless steel

302 heavy-duty 10 gauge stainless steel designed specifically for application in redwood, cedar & pressure treated lumber.

- Bugle head
- · 302 stainless steel

12 heavy-duty 10 gauge stainless steel designed
ecifically for application in redwood, cedar & pressure
eated lumber.

STAINLESS STEEL Deck & Fence



- Type 17 pointNo. 2 Phillips recess

305 Stainless Steel Flat Head

302 stainless steel







305 stainless steel

305 stainless steel, I flat head, star drive screws designed for deck and fence fastening where additional corrosion protection is needed. Pre-drill holes for best results.

STAINLESS STEEL Deck & Fence

- QuickGrab™ point
- Start 20 recess
- 305 stainless steel

FLAT HEAD, STAR 20 RECESS, 305 S/STEEL, QUICKGRAB GTST125 8 x 1-1/4-in 28-lb 5M GTST150 8 x 1-1/2-in 26-lb 4M FLAT HEAD, STAR 20 RECESS, 305 S/STEEL, QUICKGRAB GTST200 24-lb FLAT HEAD, STAR 20 RECESS, 305 S/STEEL, QUICKGRAB 8 x 2-in GTST250 FLAT HEAD. STAR 25 RECESS, 305 S/STEEL, QUICKGRAB 10 x 2-1/2-in 28-lh 2 5M GTST300 10 x 3-in 24-lb 2M FLAT HEAD, STAR 25 RECESS, 305 S/STEEL, QUICKGRAB FLAT HEAD, STAR 25 RECESS, 305 S/STEEL, QUICKGRAB GTST350 10 x 3-1/2-in 25-lb 1.5M

1M

305 S/S Trim Head Deck Screw







305 stainless steel

STAINLESS STEEL Deck & Fence

305 stainless steel, trim head, star drive fine thread Streaker® screws designed for fastening decks and trim to light gauge steel or wood. Pre-drill holes for best results

- Trim head
- QuickGrab™ point
- Start 15 recess 305 stainless steel

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
GTSTTR158	7 x 1-5/8-in	41.28-lb	1M	TRIM HEAD, STAR 15 RECESS, QUICKGRAB, 305 S/Steel
GTSTTR225	7 x 2-1/4-in	57.15-lb	1M	TRIM HEAD, STAR 15 RECESS, QUICKGRAB, 305 S/Steel
GTSTTR300	8 x 3-in	88.90-lb	1M	TRIM HEAD, STAR 20 RECESS, QUICKGRAB, 305 S/Steel

Wood to Wood Framing

Lag-Master™



Performance Data:

Application: Structural Compliance with the following codes: 2015, 2012, 2009 International Building Code® (IBC) 2015, 2012, 2009 International Building Code" (IRC)
2015, 2012, 2009 International Residential Code® (IRC)
All local code requirements must be followed and a design
professional should be consulted for proper spacing requirements.
BEND YIELD 150,000 (psi)

Structura	E MONTRO LINO C	Enctonore
- SILUGIULAI		rusiellers
on other di		I usiciici

Multi-purpose wood fastener for general wood construction such as ledger boards, laminated beams, underdeck connections, trusses, joists, dimensional lumber and timber framing.

> Lag-Master™ and Tie-Master™: TWO FASTENERS FOR ALL YOUR STRUCTURAL WOOD FRAMING NEEDS.

- ICC-ES 3531 Certified
- 3/8-in Hex head
- Type 17 point
- Draw-Tite shank
- Mechanical Galvanized

PART NO.	SIZE	COUNT	DESCRIPTION
GLM312RP	14 x 3-1/2-in	Retail Pack, 10-ct	HEX HEAD, COARSE THREAD, TYPE 17 POINT, GALVANIZED
GLM312CP	14 x 3-1/2-in	Count Pack, 50-ct	HEX HEAD, COARSE THREAD, TYPE 17 POINT, GALVANIZED
GLM312	14 x 3-1/2-in	Bulk, 500-ct	HEX HEAD, COARSE THREAD, TYPE 17 POINT, GALVANIZED
GLM400RP	14 x 4-in	Retail Pack, 10-ct	HEX HEAD, COARSE THREAD, TYPE 17 POINT, GALVANIZED
GLM400CP	14 x 4-in	Count Pack, 50-ct	HEX HEAD, COARSE THREAD, TYPE 17 POINT, GALVANIZED
GLM400	14 x 4-in	Bulk, 500-ct	HEX HEAD, COARSE THREAD, TYPE 17 POINT, GALVANIZED
GLM412RP	14 x 4-1/2-in	Retail Pack, 10-ct	HEX HEAD, COARSE THREAD, TYPE 17 POINT, GALVANIZED
GLM412CP	14 x 4-1/2-in	Count Pack, 50-ct	HEX HEAD, COARSE THREAD, TYPE 17 POINT, GALVANIZED
GLM412	14 x 4-1/2-in	Bulk, 500-ct	HEX HEAD, COARSE THREAD, TYPE 17 POINT, GALVANIZED
GLM500RP	14 x 5-in	Retail Pack, 10-ct	HEX HEAD, COARSE THREAD, TYPE 17 POINT, GALVANIZED
GLM500CP	14 x 5-in	Count Pack, 50-ct	HEX HEAD, COARSE THREAD, TYPE 17 POINT, GALVANIZED
GLM500	14 x 5-in	Bulk, 500-ct	HEX HEAD, COARSE THREAD, TYPE 17 POINT, GALVANIZED
GLM600RP	14 x 6-in	Retail Pack, 10-ct	HEX HEAD, COARSE THREAD, TYPE 17 POINT, GALVANIZED
GLM600CP	14 x 6-in	Count Pack, 50-ct	HEX HEAD, COARSE THREAD, TYPE 17 POINT, GALVANIZED
GLM600	14 x 6-in	Bulk, 500-ct	HEX HEAD, COARSE THREAD, TYPE 17 POINT, GALVANIZED
			-



LAG-MASTER 1-1/2-IN SIDE MEMBER THICKNESS, PENETRATION INTO MAIN MEMBER							
FASTENER		LM 2 1/2-IN	LM 4-IN+	3/8-IN X 3-IN LAG SCREW	1/4-IN X 2-IN LAG SCREW	20D X 2-IN Nail	16D X 1 5/8-IN NAIL
DOUGLAS FIR-LARCH SCL	0.5	209	246	130	110	170	141
DOUGLAS FIR-SOUTH	0.46	197	236	120	100	157	131
NORTHERN PINE	0.42	184	226	110	100	144	120

Tie-Master™





Performance Data:

Application: Structural Application: Structurul
Compliance with the following codes:
2015, 2012, 2009 International Building Code® (IBC)
2015, 2012, 2009 International Residential Code® (IRC)
All local code requirements must be followed and a design professional should be consulted for proper spacing requirements, BEND YIEKD 150,000 (psi)

Structural Framing Fasteners

Multi-purpose wood fastener for general wood construction such as ledger boards, laminated beams, underdeck connections, trusses, joists, dimensional lumber, decks, docks, boardwalks and timber framing.

Tie-Master™ and Lag-Master™: TWO FASTENERS FOR ALL YOUR STRUCTURAL WOOD FRAMING NEEDS.

- ICC-ES 3531 Certified
- Flat head
- Star recess
- Type 17 point Draw-Tite shank
- Mechanical Galvanized

TIE-MASTE	R 1-1/2-l	N SIDE MEMBI	ER THICKNESS, F	PENETRATION II	ITO MAIN MEM	BER
FASTENER		LM 4-IN+	3/8-IN X 3-IN LAG SCREW	1/4-IN X 2-IN LAG SCREW	20D X 2-IN NAIL	16D X 1 5/8-IN NAIL
DOUGLAS FIR-LARCH SCL	0.5	257	130	110	170	141
DOUGLAS FIR-SOUTH	0.46	246	120	100	157	131
NORTHERN PINE	0.42	232	110	100	144	120

PART NO.	SIZE	COUNT	DESCRIPTION
GTIE4RP	14 X 4-in	Retail Pack, 10-ct	FLAT HEAD, COARSE THREAD, TYPE 17, STAR 40 GALVANIZED
GTIE4CP	14 X 4-in	Count Pack, 50-ct	FLAT HEAD, COARSE THREAD, TYPE 17, STAR 40 GALVANIZED
GTIE4	14 X 4-in	Bulk, 500-ct	FLAT HEAD, COARSE THREAD, TYPE 17, STAR 40 GALVANIZED
GTIE412RP	14 X 4-1/2-in	Retail Pack, 10-ct	FLAT HEAD, COARSE THREAD, TYPE 17, STAR 40 GALVANIZED
GTIE412CP	14 X 4-1/2-in	Count Pack, 50-ct	FLAT HEAD, COARSE THREAD, TYPE 17, STAR 40 GALVANIZED
GTIE412	14 X 4-1/2-in	Bulk, 500-ct	FLAT HEAD, COARSE THREAD, TYPE 17, STAR 40 GALVANIZED
GTIE5CP	14 X 5-in	Retail Pack, 10-ct	FLAT HEAD, COARSE THREAD, TYPE 17, STAR 40 GALVANIZED
GTIE5RP	14 X 5-in	Count Pack, 50-ct	FLAT HEAD, COARSE THREAD, TYPE 17, STAR 40 GALVANIZED
GTIE5	14 X 5-in	Bulk, 500-ct	FLAT HEAD, COARSE THREAD, TYPE 17, STAR 40 GALVANIZED
GTIE6RP	14 X 6-in	Retail Pack, 10-ct	FLAT HEAD, COARSE THREAD, TYPE 17, STAR 40 GALVANIZED
GTIE6CP	14 X 6-in	Count Pack, 50-ct	FLAT HEAD, COARSE THREAD, TYPE 17, STAR 40 GALVANIZED
GTIE6	14 X 6-in	Bulk, 500-ct	FLAT HEAD, COARSE THREAD, TYPE 17, STAR 40 GALVANIZED
GTIE8RP	14 X 8-in	Retail Pack, 10-ct	FLAT HEAD, COARSE THREAD, TYPE 17, STAR 40 GALVANIZED
GTIE8CP	14 X 8-in	Count Pack, 50-ct	FLAT HEAD, COARSE THREAD, TYPE 17, STAR 40 GALVANIZED
GTIE8	14 X 8-in	Bulk, 500-ct	FLAT HEAD, COARSE THREAD, TYPE 17, STAR 40 GALVANIZED
GTIE10RP	14 X 10-in	Retail Pack, 10-ct	FLAT HEAD, COARSE THREAD, TYPE 17, STAR 40 GALVANIZED
GTIE10CP	14 X 10-in	Count Pack, 50-ct	FLAT HEAD, COARSE THREAD, TYPE 17, STAR 40 GALVANIZED
GTIE10	14 X 10-in	Bulk, 500-ct	FLAT HEAD, COARSE THREAD, TYPE 17, STAR 40 GALVANIZED
GTIE12RP	14 X 12-in	Retail Pack, 10-ct	FLAT HEAD, COARSE THREAD, TYPE 17, STAR 40 GALVANIZED
GTIE12CP	14 X 12-in	Count Pack, 50-ct	FLAT HEAD, COARSE THREAD, TYPE 17, STAR 40 GALVANIZED
GTIE12	14 X 12-in	Bulk, 500-ct	FLAT HEAD, COARSE THREAD, TYPE 17, STAR 40 GALVANIZED



GRABBER TIE-MASTER™ AND LAG-MASTER™

Grabber Tie-Master™ and Lag-Master™ deck framing fasteners have received an evaluation report from ICC Evaluation Service (ICC-ES) certifying the fasteners are in compliance with the following codes.

- > 2015, 2012, and 2009 International Building Code (IBC)
- ▶ 2015, 2012, and 2009 International Residential Code (IRC)

Multipurpose Wood Fasteners described in the report are used for engineered wood-to-wood connections in accordance with the IBC and the ANSI/AWC National Design Specification for Wood Construction (NOS). The fasteners may be used under the IRC when an engineered design is submitted in accordance with IRC Section R301.1.3.

Drywall Nails

Smooth Shank Cup Head

INTERIOR WOOD Drywall

For attaching drywall to wood framing. Smooth shank design. Extra sharp long diamond point reduces the possibility of drywall cracking. Cupped saucer head is designed to countersink into drywall. The phosphate coating reduces possible chemical reaction with joint

- Cup Head
- ooth shank
- Phosphate
- Long sharp diamond point (LSDP)

ITEM NO.	SIZE	WEIGHT	QTY	
DWCH1316	13 GA x 19/64 x 1-3/16-in	50-lb	вох	
DWCH138	13 GA x 19/64 HD x 1-3/8-in	50-lb	BOX	
DWCH158	13 GA x 19/64 HD x 1-5/8-in	50-lb	BOX	
DWCH178	13 GA x 19/64 HD x 1-7/8-in	50-lb	BOX	
DWCH138G	12.5 x 11/32 HD x 1-3/8-in	50-lb	BOX	
DWCH138G-25	12.5 GA x 11/32 HD x 1-3/8-in	25-lb	BOX	
DWCH158G	12.5 GA x 11/32 HD x 1-5/8-in	50-lb	BOX	
DWCH178G	12.5 GA x 11/32 HD x 1-7/8-in	50-lb	ВОХ	
DWCH238G	11.5 GA x 3/8 HD x 2-3/8-in	50-lb	ВОХ	

Ring Shank



INTERIOR WOOD Drywall

For attaching drywall to wood framing. Ring shank design reduces back out and nail pops. Extra sharp long diamond point reduces the possibility of drywall cracking.

- Ring shank Bright coating
- Long sharp diamond point (LSDP)

ITEM NO.	SIZE	WEIGHT	QTY	
DWAT125	12.5 x 11/32 x 1-1/4-in	50-lb	вох	
DWAT138	12.5 x 11/32 x 1-3/8-in	50-lb	вох	
DWAT158	12.5 x 11/32 x 1-5/8-in	50-lb	вох	
DWAT200	12.5 x 11/32 x 2-in	50-lb	вох	
DWAT125-25	12.5 x 11/32 x 1-1/4-in	25-lb	вох	

Smooth Shank



INTERIOR WOOD Drywall

For attaching drywall to wood framing. Smooth shank design. Extra sharp long diamond point reduces the possibility of drywall cracking.

- Smooth shank
- Cement coated
- Long sharp diamond point (LSDP)

ITEM NO.	SIZE	WEIGHT	QTY	
DWCC125H	12.5 x 11/32 x 1-1/4-in	50-lb	вох	
DWCC138	13 x 3/8 x 1-3/8-in	50-lb	BOX	
DWCC138-25	13 x 3/8 x 1-3/8-in	25-lb	BOX	
DWCC200	13 x 3/8 x 2-in	50-lb	вох	

Smooth Shank



INTERIOR WOOD Drywall

DWVC158

DWVC200

ITEM NO.

12.5 x 19/64 x 1-5/8-in

12.5 x 19/64 x 1-5/8-in

SIZE

For attaching drywall to wood framing. Smooth shank design. Extra sharp long diamond point reduces the possibility of drywall cracking. Vinyl coating protects against possible chemical reaction to joint compound and helps prevent pullouts.

- Smooth shank
- Vinyl coated
- Long sharp diamond point (LSDP)

ITEM NO.	SIZE	WEIGHT	QTY	

50-lb

50-lb

BOX

вох

QTY

Ring Shank Cup Head



INTERIOR WOOD Drywall

For attaching drywall to wood framing. Ring shank design reduces back out and nail pops. Extra sharp long diamond point reduces the possibility of drywall

- Cupped head
- Ring shankPhosphate coated
- Long sharp diamond point (LSDP)

Tension Pin



INTERIOR WOOD Drywall

Tension Pins are tempered steel designed for attaching clips, hangers, furring strips, etc. to concrete blocking.

- Flat head
- Brite coated
- 30 degree digmond point

ITEM NO.	SIZE	WEIGHT	QTY	
DWCH138RS	13 GA x 19/64 HD x 1-3/8-in	50-lb	ВОХ	

14 x 1-1/8-in *Also available in 1-lb and 5-lb sizes

WEIGHT

Grabber premium Pro Proven® brand of collated packaged and bulk nails. Providing high performance, professional grade bulk and collated fasteners manufactured in ISO 9002, certified facilities. This comprehensive line includes several nail types including common, vinyl, box, finish, casing, sinker, roofing, drywall, flooring, and masonry, among many other nails.

These fastener are designed to meet or exceed the criterion called out in ASTM F1667 Standard Specification for Driven Fasteners: Nails, Spikes, and Staples, and the Grabber Drywall nails meet or exceed the standards called out in ASTM 514 Standard Specification for Nails for the Application of Gypsum Board, and are recognized in ESR 2618.

SuperDrive The Industrial Strength Fastening System

NEW SuperDrive® N7



Convert your favorite driver into an **AUTO-FEED FASTENING TOOL!** ...in iust seconds

The new SuperDrive N7, is a light weight easy-to-use automated fastening tool designed to work with your favorite driver. N7 works with DeWalt, Makita and Hitachi screw guns.

SuperDrive® N7 head with Drywall Clip Features:

- Quick adjustment for fastener length from 3/4-in 2-3/16-in
- ▶ Use with screw diameters from 6 12 gauge
- ▶ Simple design, easy to service
- ▶ Compact and lightweight industrial-strength design
- ▶ SureLock[™] fine depth control adjustment
- ▶ Works with DeWalt, Makita and Hitachi drivers

Recommended Applications:

- Drywall and sheathing to wood or metal
- ▶ Metal to metal construction
- ▶ Wood to wood construction

Use with your choice of DeWalt, Makita, Hitachi or Grabber Rocker power tool.



SDN7M1 for use with Makita XSF03, FS4200, FS4300



SDN7D2 for use with DeWalt DCF620M2 or DCF620D2



SDN7D1 for use with Rocker 4060, 4063 and DeWalt DW272, DW266, DW274K





SUPERDRIVE - Professional Series SDN7 tools					
ITEM#	Description	WORKS WITH	BIT TIPS		
SDN7M1	N7 Series Head - Makita Corded and Cordless	FS4200, FS4300, XSF03	(Bit - CF155 w/E-Ring)		
SDN7D1	N7 Series Head - Rocker Screwguns and DeWalt Corded	4060, 4063, DW272, DW266, DW274K	(Bit - CF155 w/E-Ring)		
SDN7D2	N7 Series Head - DeWalt Cordless	DCF620M2 or DCF620D2	(Bit - CF155)		

SuperDrive® 55 Series

SuperDr ve 55 eries

Features and Benefits:

- ▶ Use for any screw application from 1-in 2-in
- ▶ Use with screw diameters from 6 12 gauge
- ▶ Simple design, easy to service
- ▶ Compact and lightweight industrial design
- ► SureLock[™] fine depth control adjustment
- Extra long bit life with patented LOX® bits

Recommended Applications:

- Drywall and Sheathing to Wood or Metal
- Metal to Metal
- ▶ Light or Heavy Gauge Metal
- **▶** Subfloor
- ▶ Wood to Wood



SuperDrive® 75 Series

SuperDr Ve 75 eries



Features and Benefits:

- ▶ Use for any screw application from 5/8-in 3-in
- ▶ Use with screw diameters from 6 12 gauge
- ▶ Simple design, easy to service
- ▶ Compact and lightweight industrial design
- Most versatile tool on the market
- ▶ Set and forget depth control system
- ▶ Extra long bit life with patented LOX® bits

Recommended Applications:

- ► Subfloor/deck/dock
- ▶ Roof tile
- ▶ Wood to metal
- Drywall and sheathing
- ▶ Wood to wood construction

SuperDrive® 80 Series

Item No. CW75F

SuperDrive 75 head with feed track

Item No. SDEXT3B

Extension rod and coupler

Item No. EXT520

Drive shaft

Item No. 38227200

Handle



Use with your choice of DeWalt, Makita, Hitachi or as pictured here with Grabber Rocker® power tool.



Wood Frame - Residential Collated Screw Applications

1,000 1,000

1,000

DRYWALL to Wood

Bugle Head GRABBER®

SIZE 6 x 1-1/4-ir 6 x 1-5/8-in 7 x 2-in

8 x 2-1/2-in



- No. 2 Phillips

可以的自由自由

- - No. 2 Phillips

SIZE		1140	NO.	COUNT
6 x 1-1/4	in	C300\	Z.	1,000
6 x 1-5/8	in	C400Y	7	1,000
	-		-	

C900

Attaches gypsum board and wood to wood. Extra shror point and threads make driving easier and provide better holding power.

applications. Extra sharp point and threads make driving easier and provide better holding power.

Bugle Head Laminator

MINISTER P



- 10 x 1-1/2-in C12 Heavy aguae drywall laminator screws are also ideal for

SUBFLOOR to Wood

LOX® Recess Sub-floor Screws



М
00
00
00

3 EXTERIOR SHEATHING to Wool

Bugle Head GRABBER®



- 6 x 1-1/4-in C300RG 1,000 6 x 1-5/8-in 7 x 2-in CSOORG 1,000

Attaches sheathing, insulation board, wood, etc. wood. Standard bugle head.

NOTE: Staining may occur when using freshly cut lumber.

DECKS & FENCE to Wood

LOX® Recess Deck Screws



- No. 2 LOX®

C8250L2M 8 x 2-1/2-in 9 x 3-in C9300L2M 1,000 Designed for exterior deck & fence construction. Experience fewer cam-outs and an unparalleled driving experience

C8200L2N

100000000000 Flat head

- Coarse thread • No. 2 LOX®

• .		
SIZE	ITEM NO.	COUNT
10 x 3-in	CB103001316	1 000

Designed for exterior deck & fence construction. 316 Marine grade stainless steel flat head deck and fence screw Designed for high corrosion environments.

Experience fewer cam-outs and an unparalleled driving experience with LOX® recess fasteners.

Metal Frame Applications

8 x 2-in

5 DRYWALL to Light Gauge Metal

Interior Fine Thread



- ITEM NO 6 x 1-1/4-in C368 1,000 C468 6 x 1-3/4-in Attaches gypsum board to wood or 25-20 ga. steel Standard bugle head.

6 DRYWALL to Heavy Gauge Mete


Bugle Head Drill Point





SIZE	ITEM NO.	COUNT
6 x 1-1/4-in	C14Z	1,000
6 x 1-5/8-in	C15Z	1,000
6 x 1-7/8-in	C16Z	1,000
Attachae aumeum he	ard to 20 14 ag stool 9	Standard

RESIDENTIAL APPLICATIONS

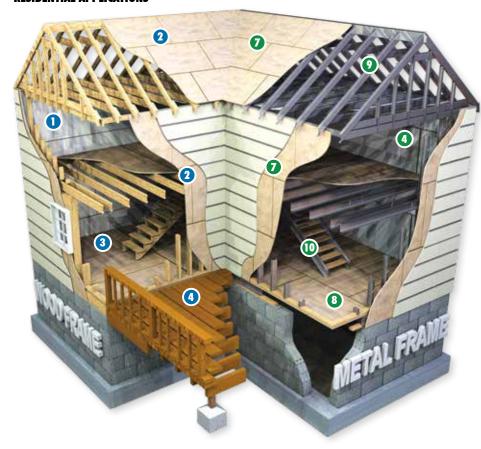

SuperDrive is state-of-the-art:

Professional tools designed to do the job.

- SuperDrive N7 drives screws from 3/4-in to 2-in and up to 10 aguae. N7's light-weight and compact design make it the ideal tool for hanging drywall.
- SuperDrive 05 drives screws from 3/4-in to 2-in and is most often used for metal to metal construction.
- ▶ SuperDrive 55 drives screws from 1-in to 2-in and is ideal for metal framing and drywall fastening applications.
- ▶ SuperDrive 75, drives screws from 3/4-in to 3-in and is designed for sub-floor, roof tile, docks and deck fastening applications.
- SuperDrive 85 features a narrow indexing module designed to reach into tight corners and recess. SuperDrive 85 is perfect for metal framing, and metal roof stitching, and drives 3/4-in - 7/8-in screws.
- SuperDrive 80 features a narrow indexing module designed to reach into tight corners and recess. SuperDrive 80 is perfect for metal framing, hanging drywall, and drives 3/4-in - 7/8-in screws.


SuperDrive is a modular, professional automated fastening system. The tools described above are combined with any number of screws and two nose-piece types to meet the specific demands of particular applications. SuperDrive can be used with or without an extension and can be used with most major screw-guns including Makita Hitachi DeWalt and Rocker

SuperDrive is simply the best:

- ▶ Will not jam
- Rapid change bits
- ▶ 50 screws per strip
- Low maintenance modular design
- ▶ Custom designed hardened nose piece
- Accurate depth control
- Drives at anales
- Works in narrow and restricted snaces

Quality every step of the way... The reason the pros choose GRABBER®

GRABBER® sweats the small stuff, and that makes all the difference. The professionals first choice for over 40 years, GRABBER® premium quality screws are built for performance. Sharper threads mean a better driving experience so GRABBER® changes thread dies more frequently. Tight recesses mean screws are less likely to cam-out and bit tips will last longer so GRABBER® changes recess dies more frequently. Consistent heat treating means screw heads will be less likely to pop off, so GRABBER® heat treats fewer screws at a time ensuring more even heat treatment. These are small things most people don't notice, but they are also small things that make the difference between average fasteners and professional grade fasteners.

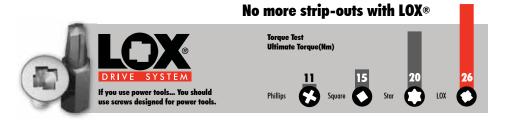

Metal Frame - Residential and Commercial Collated Screw Applications

SUPERDY PROPERTY OF Auto-feed Fastening System



SDDW25IT Makita, 2500RPM, w/drywall clip SDDWIT Grabber Rocker, 4000RPM, w/drywall clip **SDDWITF** Grabber Rocker, 4000RPM, w/feed track





N7 Series Head - Makita Corded

SDN7D1 N7 Series Head - Rocker Screwauns and DeWalt Corded SDN7D2



5540IT Grabber Rocker, 4000 RPM, w/feed track 5540DTG Grabber Rocker, 4000 RPM, w/drywall clip, no extension Grabber Rocker, 4000 RPM, w/extension 5540XTG



Item No.	Description
7525XT	Grabber Rocker, 2500 RPM w/extension
7525RR	Grabber Rocker, 2500 RPM, no extension, special roofing nose-piece
7540XT	Grabber Rocker, 4000 RPM w/extension
7545HXT	Hitachi, 4500 RPM w/extension
7560XT	Makita, 6000 RPM w/extension

COMMERCIAL APPLICATIONS

















EXTERIOR SHEATHING to Heavy Gauge Metal

Bugle Head Drill Point

(more	AAAAAAAA	
	Bugle head	



ITEM NO.	COUNT
C14RG	1,000
C15GG8P	1,000
C16RG	1,000
C14RG8F2	1,000
	C15GG8P C16RG



G

7 SHEATHING Ply/OSB, Exterior Board to Light Gauge

Bugle Head STREAKER®

DOCUMENTA DESCRIPTION OF THE PERSON OF THE P

No. 2 Phillip

ITEM NO. 6 x 1-1/4-in C368RG anames sheathing, insulation board, wood, etc. to 25-20 ga. steel studs. Standard bugle head. Features GrabberGard® exterior coating.



SHEATHING Ply/OSB, Exterior Board to Light Gauge

Bugle Head Vector™ Point



6 x 1-1/4-in C368V



Flat Wafer Head Winged Drill Point



· No. 2 LOX®

8 x 1-5/8-in CGH8158LG 1.000 Attaches high density sheathing and fiber cement vertical siding to heavy gauge metal. Features a .375 diameter head and GrabberGard® exterior coating.

SUB-FLOOR Ply/OSB, Heavy Gauge Metal

Flat Head Stabber®



CS8150JBWYZ 8 x 1-1/2-in 1.000 CS8200JBWYZ Fine thread STABBER® sub-floor screws attach plywood/OSB to 22-16 gauge steel. Flat head provides a flush finished surface. LOX® recess does not require a magnetic bit tip holder and provides a sure driving experience. No. 2 LOX®

Flat Head Pilot Point



• Flat head
• Fine thread
• No. 2 LOX®

SIZE	ITEM NO.	COUNT
8 x 1-5/8-in	CM158SDZJBW	1,000
8 x 1-3/4-in	CM175SDZJBW	1,000
8 x 2-in	CM200SDZJBW	1,000

Attaches 3/8-in to 1-in plywood to steel joist 20-14 ga. LOX® recess does not require a magnetic bit tip holder and provides a sure driving experience.

ITEM NO. COUNT

Flat Head PLYLOK®



Winged drill point
 No. 3 LOX®

10 x 2-1/2-in C10250L3YZE 1.000 10 gauge winged drill point PLYLOK® screws attach plywood/OSB sub-floor panels to steel joist 20-14 ga. LOX® recess does not require a magnetic bit tip holder and

SIZE



• Flat head • Winged drill point • No. 3 LOX® • GrabberGard® gray SIZE ITEM NO. 10 x 2-in C10200L3GE


10 gauge winged drill point PLYLOK® screws attach plywood/OSB sub-floor panels to steel joist 20-14 ga. LOX® recess does not require a magnetic bit tip holder and provides a sure driving experience. METAL FRAMING Heavy Gauge Metal

Flat Pan Head Drill Point

• Flat pan he • Drill point • No. 2 LOX®

ITEM NO. 10-18 x 3/4-in CFP101875LYZ 10-22 x 3/4-in CFP102275LYZ 12-18 x 7/8-in CFP121878JBWZ 1,000 Flat pan head drill point fasteners designed for attaching 20-14 ga. steel.





10) SHEATHING Heavy Gauge Metal to Ply/OSB **Modified Flat Pan Head Drill Point**

-	Harrison -
0	Modified flat pa Hi-Lo threads
W	 Hi-Lo threads
$\overline{}$	B 411

	mounica nai pan neac
•	Hi-Lo threads
•	Drill point

•	Drill point
•	No. 3 LOX®
	Yellow zinc

11 x 1-3/8-in	CDMWH138	1,000			
Attaches 20-14 ga.	Attaches 20-14 ga. steel to plywood and OSB sheathing. LOX® recess does not require a magnetic bit tip holder and				
LUX® recess does n provides a sure driv		t tip holder and			

ITEM NO. COUNT

Acoustical Fasteners

Eye-lag Screws



INTERIOR	WOOD	Hange

Attaches hanger wire to wooden ceiling joist.

Black phosphate

ITEM NO.	SIZE	WEIGHT	QTY	
3EL	1/4 x 3-in	36-lb	1,000	
4EL	1/4 x 4-in	38-lb	1,000	

Eye-lag Screws



LIGHT GAUGE METAL Hanger Attaches hanger wire to steel deck or joist ceiling.

25-20 ga. Clear zinc

ITEM NO.	SIZE	WEIGHT	QTY
H-3	1/4 x 2-3/4-in	20-lb	1,000
H-4	1/4 x 2-in	20-lb	1,000
H-5	1/4 x 3-1/4-in	20-lb	1,000

Eye-lag Screws



HEAV	Y GAUGE	METAL	Hanger

Attaches hanger wire to steel deck or joist ceiling. 20-14 ga.

• Clear zinc

ITEM NO.	SIZE	WEIGHT	QTY
H-2	1/4 x 2-in	20-lb	1,000
11.1	1/4 2 :	20 IL	1.000

Eye Lag Adapter



	ITEM NO.	DESCRIPTION
_	ELAT	Eye Lag Installation tool

Eye Lag Pole



ITEM NO.	DESCRIPTION
LM12	Eye Lag Pole, 4' - 12'
LM18	Eye Lag Pole, 6' - 18'
LM24	Eye Lag Pole, 8' - 24'

CB Clips

CB Clip



Frame an 8-ft column or beam in under 2 minutes with Grabber column and beam clips

Column & Beam fireproofing clips provide a finished, coded correct drywall surface, ready to final decoration.

These UL listed steel framing clips recognized in: Steel Framing Member Fire Resistance Classification Design Numbers.

Columns: X513, X517, X520, X522, X523, X528, X535 Beams: N501, N502, N505 See UL Fire Resistance Directory 75XL, Made in the USA

ITEM NO. DESCRIPTION CB60 IBEAM CLIP



- Use half the material
 No loss of usable floor space
 Snaps on by hand. . . . no tools required
 Application time 75 seconds per column
- 12 operations per column vs. 80
 Approved by Underwriters' Laboratories

EZ FRAMING COLLAR



Quickly frames round support columns for finishing with drywall, paneling, etc.

E-Z Column Framing Collars are a hinged one piece construction for fast, easy framing around round columns. Collars fit both standard 3" and 3-1/2" steel columns. Use our blue collar for 4" supports

ITEM NO.	DESCRIPTION
EZCOL3	3-in to 3-1/2-in (YELLOW)
EZCOL4	4-in (BLUE)





E-Z COLUMN

Use blue collar with 4" Columns

Use yellow collar with 3" and 3-1/2" Columns

Insert Bits and Bit Holders

Phillips Bit Tips



ITEM NO.	SIZE	LENGTH	DESCRIPTION
2BIT	No. 2	1-in	Phillips Bit (reduced)
250PB1	No. 1	2-1/2-in	Phillips Bit
250PB2	No. 2	2-1/2-in	Phillips Bit (regular)
250PB3	No. 3	2-1/2-in	Phillips Bit
30-2P	No. 2	1-15/16-in	Phillips Bit
30-3P	No. 3	1-15/16-in	Phillips Bit

Phillips SuperDrive® Bit Tips

ITEM NO.	SIZE	LENGTH	DESCRIPTION
1 TCW153	No. 2	6-in	Phillips Bit
CF155	No. 2	6-1/4-in	Phillips Bit (SD, N7)
CF158	No. 2	6-3/8-in	Phillips Bit (SD, N7)
17 TCW178B	No. 2	7-in	Phillips Bit (SD, N7)



STAR Bit Tips

metebo.	Mr.	

ITEM NO.	SIZE	LENGTH	DESCRIPTION	
S2T25	No. 25	1-in	STAR Bit	
S2T20	No. 20	1-in	STAR Bit	
62T20	No. 20	2-in	STAR Bit	

Square Bit Tips



ITEM NO.	NO. SIZE LEI		DESCRIPTION
250R1	No. 1	1-in	Square Bit
250R2	No. 2	1-in	Sauare Bit

Magnetic Nut Drivers



ITEM NO.	SIZE	DESCRIPTION	
MSHS14	1-1/8 x1/4-in	Short Nut Setter	
MSHS516	1-1/8 x 5/16-in	Short Nut Setter	
MSHS38	1-1/8 x 3/8-in	Short Nut Setter	
MSH14	1-3/4 x 1/4-in	Medium Nut Setter	
MSH516	1-3/4 x 5/16-in	Medium Nut Setter	
MSH38	1-3/4 x 3/8-in	Medium Nut Setter	
MSHL14	2-9/16 x 1/4-in	Long Nut Setter	
MSHL516	2-9/16 x 5/16-in (6-in)	Long Nut Setter	
MSHL38	2-9/16 x 3/8-in	Long Nut Setter	

Magnetic Bit Holders



ITEM NO.	SIZE	DESCRIPTION
MBHW14	1/4 x 2-3/8-in	Magnetic Bit Holder
MBH143	1/4 x 3-in	Magnetic Bit Holder
MBH146	1/4 x 6-in	Magnetic Bit Holder
MBH148	1/4 x 8-in	Magnetic Bit Holder
MBH1410	1/4 x 10-in	Magnetic Bit Holder
MBH1412	1/4 x 12-in	Magnetic Bit Holder

Quick Connect Bit Holder



ITEM NO.	DESCRIPTION
BH142	Quick Connect Bit Holder
BPBH142	Quick Connect Bit Holder (2 pack)


LOX® 1-in Bit Tips





ITEM NO.	SIZE	LENGTH	DESCRIPTION	
1002LN	No. 2	1-in	LOX Bit	
₫ 1002LB2	No. 2	1-in	LOX Bit (2 pc)	
1002LB5	No. 2	1-in	LOX Bit (5 pc)	
1002L	No. 2	1-in	LOX Bit (stick fit)	
100L3	No. 3	1-in	LOX Bit (stick fit)	

LOX® 2-in Bit Tips



2-in

No. 3





LOX Bit (stick fit)

LOX® 3-in Bit Tips LOX

LOX 2



200L3

ITEM NO.	SIZE	LENGTH	DESCRIPTION
∰ 3002L	No. 2	3-in	LOX Bit (stick fit)
∰ 300L3	No. 3	3-in	LOX Bit (stick fit)
		COLUMN UND	
	▶ L(OX 3	

LOX® 2-in Double Sided Bit Tips



ITEM NO.	SIZE	LENGTH	DESCRIPTION
1 2002LLB2	No. 2	2-in	LOX Bit (2 pc/stick fit)
37 2002LLB5	No. 2	2-in	LOX Bit (5 pc/stick fit)

LOX® #2 SuperDrive Bit Tips LOX



ITEM NO.	SIZE	LENGTH	DESCRIPTION
11 T2153L	No. 2	6-in	LOX Bit
17 T2153LN	No. 2	6-in	LOX Bit (Hard)
11 T2178LN	No. 2	7-in	LOX Bit

LOX® #3 SuperDrive Bit Tips



ITEM NO.	SIZE	LENGTH	DESCRIPTION	
13153LN	No. 3	6-in	LOX Bit	
11 T3178LN	No. 3	7-in	LOX Bit	
_	_	_		

LOX® IS DESIGNED FOR POWER TOOLS

In a recent independent torque test, LOX screws demonstrated almost double the torque capacity of a four point contact recess. Applying increased torque to the recess — the standard drive cammed out with 15 Nm (well before the screw was fully seated). In every comparable test, the LOX recess screw seated completely with an average force of 26 Nm.

Advantages of LOX®

- Less Waste
- Less Wobble Less Cam Out ▶ Fewer Slivers
- Stick Torque Drives Off Angle
- ▶ Exceptional Bit Life







TENSOR™ BIT WITH REDUCED SHANK

Tensor reduced shank bit tips minimize engagement shock extending bit tip life. Tensor bits are the first bits designed specifically for impact wrenches and screw guns.



LOX Stick-Fit bit tips are ideal for use with Grabber bulk screws. Stick-fit bit tips are precision bit tips designed to fit snugly into a LOX recess allowing screws to be held in place on the end of the bit tip. No magnetic bit is required. Stick-fit also means a better driving experience drive after drive with less chance for cam-outs.

Grabber Premium Abrasive Wheels

Abrasives



Item No. G21400 PREMIUM CHOP SAW BLADE



Item No. 1400 IMPACT METAL STUD EATER



Item No. G41204078MS ABRASIVE BLADE

- ITEM NO. SIZE RPM G123321MS 12 x 3/32 x 1-in 5,100 1400 14 x 3/32 x 1-in 4,365 G21400 14 x 3/32 x 1-in 4,400 G41204078MS 4.5 x .040 x 7/8-in 13,300 G41211678MS 4.5 x 1/16 x 7/8-in 13,300 G71858MS 7 x 1/8 x (Diam-5/8)-in 8.700 G101858MS 10 x 1/8 X 5/8-in 6,100 GDBT4512 7-in 13,300 GDBT712 8.500 7-in G60004078MS 6 x .040 x 7/8-in 8,700 GDBT4512 4-1/2-in 13.300 GDBT712 7-in 8,500
- Designed for use on stationary chop saws.
- ▶Use as cutting tools on hand held grind machines.
- Aluminum oxide for smooth cutting and longer tool life.
- For use on iron, steel, tubing and bar.
- ▶ For structural shapes such as steel studs and ferrous applications.
- Double layer of heavy-duty fiberglass for safety.



Item No. BT712 7-IN TURBO DIAMOND BLADE




Item No. GDBT4512 4.5-IN TURBO DIAMOND BLADE

- ▶ High diamond matrix concentration.
- Fast, smooth cutting.
- Use wet or dry.
- ▶ Cooling holes extend the life of the blade.

Screw Drivers

Grabber ROCKER® Screw Driver

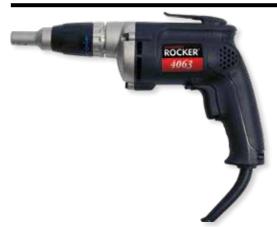

ITEM I	NO. RPM	AMP	WEIGHT
4063	0-4000	6.3	3.1-lb

- ▶ High torque pro clutch heavy-duty screw driver 120V AC, 50-60 Hz
- ▶ 6.3 Amp HD 0 4,000 RPM variable speed reversible
- ▶ Set & forget aluminum depth locater pop-on/pop-off nose piece
- ▶ Includes #2 Phillips bit-tip and magnetic bit-tip holder 3.1 lb. (1.4 Kg)

POWDER FASTENING SYSTEMS GRABBER, HAS YOUR FASTENING NEEDS COVERED

RAMSET® Powder Fastening Systems

Ramset® Mastershot



Advantages:

- Designed for frequent use providing professional fastening results in a variety of concrete, masonry or steel applications
- ▶ The MasterShot is a traditional trigger operated tool
- ▶ Ergonomic design for operator comfort
- Positive barrel and load retention prevents barrel from opening freely, allowing easy horizontal and overhead fastening
- Powder load automatically ejects after each use
- Quiet operation

Specifications:

- ▶ .22 Single Shot Tool
- ▶ Uses standard .22 caliber single shot powder loads: 2 (Brown), 3 (Green), 4 (Yellow)
- Weight: 4.4 lbs.

SHANK IN	LENGTH MM	APPLICATION	ITEM NO.
3-in	76.2-mm	2 X 4 TO CONCRETE	1524SDP (WASHERED)
2-1/2-in	63.5-mm	2 X 4 TO CONCRETE	1516SDC (WASHERED)
3/4-in	19.1	DRYWALL TO CONCRETE	1506B

Mastershot (Common Fasteners)

Ramset® XT540 — Semi Automatic



Advantages:

- Power adjust dial down two full loads
- Quick & easy front end maintenance
- ▶ Fully automatic piston return
- ► Shock absorbing rubber grip
- ▶ Ergonomically balanced
- ▶ Trigger lock & hand guard for safety

Specifications:

- ▶ Low recoil .27 caliber strip tool
- Capacity for up to 3-in pin

The Ramset XT540 was specifically designed for the commercial framer for heavy-duty interior and exterior applications. The XT540's combination of high power and durability make it the ideal tool for the following applications:

- ▶ Driving 1-1/4-in embedment for perimeter track
- ▶ Fastening track & clips to structural steel
- ▶ Track to hard concrete
- ▶ Excellent compliment to the Ramset TrakFast tool

XT540 (Common Fasteners)

PIN LENGTH	LENGTH MM	EMBEDMENT LENGTH	ITEM NO.
.545-in	13.8-mm	1/2-in PREMIUM STEEL PIN	TE12
13/16-in	20.6-mm	3/4-in TRUE EMBEDMENT PIN	TE34
1-5/16-in	33.3-mm	1-1/4-in TRUE EMBEDMENT PIN	TE114



POWDER FASTENING SYSTEMS

GRABBER HAS YOUR FASTENING NEEDS COVERED

Ramset® Cobra — Semi Automatic



Advantages:

- ▶ Semi-automatic .27 caliber tool uses strip loads
- ▶ Padded recoil absorbing handle for greater operator comfort
- ► Fastens up to 3-in drive pins and threaded studs ideal for general construction applications
- ▶ Full one year warranty

Specifications:

- .27 caliber 10 shot strip loads: 3 (Green), 4 (Yellow), 5 (Red)
- ▶ Weight: 4.5 pounds
- ▶ Length: 13-1/4-in
- Muzzle bushing O.D.: 9/16-in
- Maximum pin length: 2-1/2-in (3-in w/washer)

Cobra (Common Fasteners)	SHANK IN	LENGTH MM	APPLICATION	ITEM NO.
	3-in	76.2-mm	2 X 4 TO CONCRETE	1524SDP
·	2-1/2-in	63.5-mm	2 X 4 TO CONCRETE	1516SDC
	3/4-in	19-mm	DRAMVIT LBVCK TO CONCRETE	1506

Ramset® Viper — Semi Automatic



Advantages:

- ▶ Automatic load advance
- ▶ Automatic piston return
- Overdrive protection
- ▶ Open front-end design
- ▶ Simplified barrel retention collar
- ▶ Stable steel collar
- ▶ Uses Viper pole system

Specifications:

- ▶ .27 Caliber strip tool
- ▶ Semi-Automatic
- Designed specifically for overhead applications
- ▶ 3 year warranty
- ▶.27 caliber 10-shot strip loads, 3 (green), 4 (yellow), 5 (red)
- ▶ Weight: 4.5 lbs.
- ▶ Length: 17-in
- Maximum pin length: 1-1/2-in

Viper (Common Fasteners)

SHANK IN	LENGTH MM	APPLICATION	ITEM NO.
1-in	25.4-mm	THREADED ROD HANGER	14TRHSS10
1-in		THREADED ROD HANGER	38TRHSS10
1-in		CEILING CLIP	SDC100
1-1/4-in	31.8-mm	CEILING CLIP	SDC125
7/8-in		CEILING CLIP	SPC78
1-1/4-in	31.8-mm	CEILING CLIP	SPC114



GAS FASTENING SYSTEMS

GRABBER HAS YOUR FASTENING NEEDS COVERED

RAMSET® Electronic Fuel Injection

Ramset® T3MAG



Advantages:

- ▶ Higher stick rate (.125 diameter pin)
- ▶ 25% more power
- Easy push-down force
- Deep leg track capable
- ▶ 45 pin magazine capacity
- Newly designed fitted dust shield
- Battery charger provides constant charging even with voltage drops.
- ▶ ICC approved (ESR -1955)

Specifications:

- ▶ Weight: 9.2 lbs
- ▶ Height: 15-in
- ▶ Length: 18-1/2-in
- ▶ Width: 4.3-in
- ▶ Fuel cell design: One step insert and click
- ▶ 45 pin magazine capacity
- Fastener assembly: 15 pin (strip)
- ▶ Fastener length capability: 0.5 1.0-in
- Fastener pin diameter: .125-in
- ▶ Fuel cell capacity: Over 100 shots
- ▶ Shots per battery charge: 3000 (approx.)

T3MAG (Common Fasteners)

ACCESSORI	ES
T3FUEL	FUEL CELL
B0092	BATTERY

SHANK IN	LENGTH MM	APPLICATION	ITEM NO.
½-in STEEL PIN W/ T3 FUEL	1000	5 BOXES (5000)	T3012
3/4-in CONCRETE PIN W/T3FUEL	1000	5 BOXES (5000)	T3034B
3/4-in STEP-SHANK CONCRETE PIN W/T3FUEL	1000	5 BOXES (5000)	T3034S
1-in CONCRETE PIN W/T3FUEL	1000	5 BOXES (5000)	T3100

Ramset® TrakFast



Still the most revolutionary fastening system in the construction industry

Since its introduction in 1991, TrakFast has been the tool of choice for both interior and exterior contractors. The TrakFast Automatic Fastening System fastens all types of track, from standard track to hat channel, deep leg, Z, and J channel. Contractors continue to report tremendous savings when using TrakFast for high production fastening.

Advantages:

- ▶ Increased durability and reliability
- Off position to prevent battery drainage
- ► Three to five times faster than powder tools
- ▶ 42 pin magazine
- Piston automatically resets

Specifications:

- ▶ Gas technology
- ▶ Fully automatic
- ▶ 1-1/2-in pin capacity
- ▶ 42 pin magazine capacity
- ▶ Length: 17.5-in

- ▶ No recoil
- ▶ No licensing required
- ▶ No changing loads
- Narrow nose & profile
- 2 year warranty (6 months on wearable parts)
- ▶ Height: 15-in
- ▶ Weight: 8.3-lbs.
- ▶ Maximum cycles per second: 2
- ▶ Fuel cell: 1000 shots
- ▶ Battery (charged): 3000 shots

TF1200 (Common Fasteners)



ACCESSORIES

TFUEL	FUEL CELL
B0092	BATTERY

SHANK IN	LENGTH MM	APPLICATION	ITEM NO.
½-in		PIN,	FPP012
½-in	12.7-mm	STEP DOWN PIN	FPP012S
3/4-in	19.1-mm	BLACK PIN	FPP034B
3/4-in		STEP DOWN PIN,	FPP034S
1-in		Pin Clear Zinc Collated	FPP100
1-1/4-in		Pin Clear Zinc Collated	FPP114
3/4-in		PIN BREAKAWAY STRIP	FPP034T
1-in		PIN	FPP100T
1-½-in		PIN	FPP112T
1-1/4-in		PIN	FPP114T
1-3/6-in		Wood to Metal Pin	PLY138

GRABBER: HAS YOUR FASTENING NEEDS COVERED

AIR FASTENING SYSTEMS

Air and Pneumatic Fastening Systems

Aerosmith® 400PSI Pneumatic System



Advantages:

- Lightweight only 4.4 lbs
- Free of powder loads
- ▶ No Licensing Required
- ▶ Slim nose drives pins ¼" from wall
- Depth of drive adjustment
- ▶ 100 pin coil capacity

Applications:

- Drywall track to concrete
- ▶ Steel to steel

Specifications:

- ▶ Height 12" (304 mm)
- ▶ Width 3-1/4" (83 mm)
- ▶ Length 12" (304 mm)
- Weight 4.4 lbs (2 kgs)
- ▶ Recommended Operating Pressure 210-320psi (14-22 bar)
- ▶ Loading Capacity Up to 100 fasteners

Pneumatic Fasteners

ITEM NO.	LENGTH	SHANK DIAM.	APPLICATION
2193HP	¾-in	.109 x .250	LGS TRACK TO HARD CONCRETE
2193HPST	3⁄4-in	.104 x .118	LGS TRACK TO HARD CONCRETE
3193HPST	³⁄₄-in	.104 x .125	LGS TO CONCRETE IN PLACE OF .157 DIAMETER PINS

^{* 3193}HPST INCLUDES CARRY CAS

Aerosmith® VersaPin



Advantages:

- Lightweight only 4.8 lbs
- Depth of Drive Adjustment
- ▶ 360° adjustable exhaust deflector
- Uses Aerosmith brand flat wire welded fasteners
- ▶ Anti-Double fire mechanism
- Trigger Lock to prevent accidental firing
- ▶ Anti-Skid pad
- ▶ Shock absorbing comfort rubber handle
- ▶ Belt Clip
- ▶ Comes with plastic carrying case

Applications:

- ▶ Plywood to Steel 14 18 ga (68-43 mil)
- Exterior Gypsum to Steel 14 18 ga (68-43 mil)
- ▶ Cement Fiber Board to Steel 14 18 ga (68-43 mil)
- ▶ Steel to Steel 14 18 ga (68-43 mil)
- ▶ Stucco Lath Applications 14 18 ga (68 43 mil)

Specifications:

- ▶ .Height 11-1/4"" (285 mm)
- ▶ Width 4-2/5" (112.2 mm)
- Length 9-1/2" (241.5 mm)
- ▶ Weight 4.8 lbs (2.2 kgs)
- Recommended Operating Pressure 70-120 psi (4.9-8.3 bar)
- ▶ Loading Capacity Up to 200 fasteners

Fasteners	ITEM NO.	LENGTH	SHANK DIAM.	APPLICATION
	2325A	1 ¼-in	.312 x .100	PLYWOOD AND EXTERIOR GYPSUM TO LGS FRAMING
	2385AG	1 ½-in	.312 x .100	HARDIE PLANK LAP SIDING TO LGS FRAMING



AIR FASTENING SYSTEMS



Air Compression

MAX® PowerLite™ High Pressure Air Compressor



Pumps up to 500PSI and is Light Weight, just 41.4-lbs

The DC Brushless Motor is more powerful, quiet and lighter than the conventional motors. Inverter motor circuit adjusts RPM to extract maximum performance voltage level.

Specifications:

- Light weight and mobile (41.4-lbs)
- DC brushless motor
- ▶ 14 1/2-in x 12 3/8-in x 23 1/2-in
- ▶ 2.5 gallon tank volume
- ▶ 2 HP motor
- ▶ 3.5 CFM at100 PSI, 2.8 CFM at 300 PSI air displacement
- ▶ 3,300 RPM rated speed (2,200 RPM in quiet mode)



Brand Name Access Doors

GRABBER GIVES YOU ACCESS ACCESS DOORS

Applications:

- Fire Rated Access
- Drywall Access
- Recessed Access
- ► Stainless Steel Access
- ▶ Interior Access
- Exterior Access
- ► Ceiling/Attic access
- Security Access
- ▶ Valve Access
- ▶ Plumbing Access
- Cabinet Box Access
- ▶ Plaster Access

Your Grabber dealer has information on brands, sizes and styles of doors to accommodate your trade needs.











ITW Red Head® Truebolt and Trubolt + Mechanical Anchoring System

Trubolt +



Seismic Wedge Anchor bolt

SIZE

1/4 x 1 3/4-in

1/4 x 2 1/4-in

1/4 x 3 1/4-in

3/8 x 2 1/4-in

3/8 x 2 3/4-in

3/8 x3 1/2-in

3/8 x 3 3/4-in

1/2" x 2 3/4-in

1/2 x 3 3/4-in

1/2 x 4 1/4-in

1/2 x 4 1/2-in

1/2 x 5 1/2-in

1/2 x 7-in

5/8 x 10-in

5/8 x 3 1/2-in

5/8 x 4 1/2-in

5/8 x 5-in

5/8 x 6-in

5/8 x 7-in

5/8 x 8 1/2-in

3/4 x 10-in

3/4 x 12-in

3/4 x 4 1/4-in

3/4 x 4 3/4-in

3/4 x 5 1/2-in

3/4" x 6 1/4-in

3/4 x 8 1/2-in

3/4 x 7-in

1 x 6-in

1 x 9-in

1 x 12-in

1 1/4 x 9-in

1 1/4 x 12-in

3/8 x 5-in

3/8 x 7-in

3/8 x 3-in

PART NO.

TB4C-1416

TB4C-1422

TB4C-1432

TB4C-3822

TB4C-3826

TB4C-3830

TB4C-3834

TB4C-3836

TB4C-3850

TB4C-3870

TB4C-1226

TB4C-1236

TB4C-1242

TB4C-1244

TB4C-1254

TB4C-1270

TB4C-58100

TB4C-5834*

TB4C-5844

TB4C-5850

TB4C-5860

TB4C-5870

TB4C-5884

TB4C-34100

TB4C-34120

TB4C-3442*

TB4C-3446

TB4C-3454

TB4C-3462

TB4C-3470

TB4C-3484

TB4C-10060

TB4C-10090

TB4C-100120

TR4C-11490

TB4C-114120

WEIGHT

3.36

3.82

4.78

4.28

4.87

5.03

5.58

5.98

7.53

9 73

4.62

5.81

6.26

6.41

7 53

9.36

8.22

3.68

4.2

4.65

5.35

6.11

7.17

12

15.84

6.08

6.61

7.4

8.24

8.99

10.46

7 70

10.84

14.34

13.55

17.93

QTY

100

100

100

50

50

50

50

50

50

50

25

25

25

25

25

25

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

5

5

5

5

DESCRIPTION

TRUBOLT + CARBON STEEL WEDGE ANCHOR

TRUBOLT + CARBON STEEL WEDGE ANCHOR TRUBOLT + CARBON STEEL WEDGE ANCHOR

TRUBOLT + CARRON STEEL WEDGE ANCHOR

TRUBOLT + CARBON STEEL WEDGE ANCHOR

TRUBOLT + CARRON STEEL WEDGE ANCHOR

TRUBOLT + CARBON STEEL WEDGE ANCHOR

TRUBOLT + CARBON STEEL WEDGE ANCHOR

 ${\sf TRUBOLT} + {\sf CARBON} \, {\sf STEEL} \, {\sf WEDGE} \, {\sf ANCHOR}$

TRUBOLT + CARBON STEEL WEDGE ANCHOR

 $\mathsf{TRUBOLT} + \mathsf{CARBON} \mathsf{STEEL} \mathsf{WEDGE} \mathsf{ANCHOR}$

TRUBOLT + CARBON STEEL WEDGE ANCHOR

TRUBOLT + CARBON STEEL WEDGE ANCHOR

TRUBOLT + CARBON STEEL WEDGE ANCHOR

TRUBOIT + CARRON STEEL WEDGE ANCHOR

TRUBOLT + CARBON STEEL WEDGE ANCHOR

Attaches to concrete and CMU block:

- ICC-ESR 3772 for Concrete ICC-ESR 4058 for CMU 2015 IBC Compliant
- COLA Approved
- **FBC Approved**
- Seismic, cracked & un-cracked concrete rated

Advantages:

- One Universal Wedge Anchor
- It has all the approvals the construction industry demands
- ▶ Complete breadth of line
- Maximum flexibility in edge distance, anchor spacing & tension strength

Specifications:

- ▶ Category 1 Performance
- ▶ Zinc Plated Carbon Steel to ASTM B633, SC1, Type 3
- ▶ Meet or exceed US Government GSA Specification A-A-1923A
- ▶ Meets BUY AMERICAN ACT





Trubolt 304 Stainless Steel




Wedge Anchor bolt

Attaches to concrete

- ICC-ESR 2251 UL Certified
- **FM Certified**

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
WW-1416	1/4 x 1-3/4-in	3.2	100	TRUBOLT 304 S.S. WEDGE ANCHOR
WW-1422	1/4 x 2-1/4-in	3.7	100	TRUBOLT 304 S.S. WEDGE ANCHOR
WW-1432	1/4 x 3-1/4-in	4.8	100	TRUBOLT 304 S.S. WEDGE ANCHOR
WW-3822	3/8 x 2-1/4-in	4.1	50	TRUBOLT 304 S.S. WEDGE ANCHOR
WW-3826	3/8 x 2-3/4-in	4.8	50	TRUBOLT 304 S.S. WEDGE ANCHOR
WW-3830	3/8 x 3-in	5.1	50	TRUBOLT 304 S.S. WEDGE ANCHOR
WW-3836	3/8 x 3-3/4-in	6	50	TRUBOLT 304 S.S. WEDGE ANCHOR
WW-3850	3/8 x 5-in	7.5	50	TRUBOLT 304 S.S. WEDGE ANCHOR
WW-1226	1/2 x 2-3/4-in	4.7	25	TRUBOLT 304 S.S. WEDGE ANCHOR
WW-1236	1/2 x 3-3/4-in	5.8	25	TRUBOLT 304 S.S. WEDGE ANCHOR
WW-1242	1/2 x 4-1/4-in	6.3	25	TRUBOLT 304 S.S. WEDGE ANCHOR
WW-1254	1/2 x 5-1/2-in	7.7	25	TRUBOLT 304 S.S. WEDGE ANCHOR
WW-1270	1/2 x 7-in	9.4	25	TRUBOLT 304 S.S. WEDGE ANCHOR
WW-5834	5/8 x 3-1/2-in	3.6	10	TRUBOLT 304 S.S. WEDGE ANCHOR
WW-5842	5/8 x 4-1/4-in	4.2	10	TRUBOLT 304 S.S. WEDGE ANCHOR
WW-5850	5/8 x 5-in	4.8	10	TRUBOLT 304 S.S. WEDGE ANCHOR
WW-5860	5/8 x 6-in	5.5	10	TRUBOLT 304 S.S. WEDGE ANCHOR
WW-5870	5/8 x 7-in	6.2	10	TRUBOLT 304 S.S. WEDGE ANCHOR
WW-5884	5/8 x 8 1/2-in	8	10	TRUBOLT 304 S.S. WEDGE ANCHOR
WW-3446	3/4 x 4-3/4-in	6.7	10	TRUBOLT 304 S.S. WEDGE ANCHOR
WW-3454	3/4 x 5-1/2-in	7.5	10	TRUBOLT 304 S.S. WEDGE ANCHOR
WW-3462	3/4 x 6 1/4-in	8.3	10	TRUBOLT 304 S.S. WEDGE ANCHOR
WW-3470	3/4 x 7-in	9.2	10	TRUBOLT 304 S.S. WEDGE ANCHOR
WW-3484	3/4 x 8 1/2-in	12.3	10	TRUBOLT 304 S.S. WEDGE ANCHOR
WW-34100	3/4 x 10-in	13.5	10	TRUBOLT 304 S.S. WEDGE ANCHOR
WW-10060	1 x 6-in	8.3	5	TRUBOLT 304 S.S. WEDGE ANCHOR
WW-10090	1 x 9-in	11.4	5	TRUBOLT 304 S.S. WEDGE ANCHOR

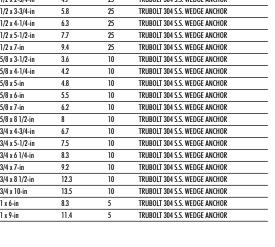



Trubolt 316 Stainless Steel



Attac	hac	ŧο	conc	rote

Wedge Anchor bolt

- ICC-ESR 2251
- **UL Certified FM** Certified
- Caltrans

	PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
	SWW-1422	1/4 x 2-1/4-in	3.7	100	TRUBOLT 316 S.S. WEDGE ANCHOR
Ī	SWW-1432	1/4 x 3-1/4-in	4.8	100	TRUBOLT 316 S.S. WEDGE ANCHOR
Ī	SWW-3826	3/8 x 2-3/4-in	4.8	50	TRUBOLT 316 S.S. WEDGE ANCHOR
Ī	SWW-3830	3/8 x 3-in	5.2	50	TRUBOLT 316 S.S. WEDGE ANCHOR
Ī	SWW-3836	3/8 x 3-3/4-in	6	50	TRUBOLT 316 S.S. WEDGE ANCHOR
Ī	SWW-3850	3/8" x 5-in	7.5	50	TRUBOLT 316 S.S. WEDGE ANCHOR
Ī	SWW-1236	1/2 x 3-3/4-in	5.8	25	TRUBOLT 316 S.S. WEDGE ANCHOR
Ī	SWW-1242	1/2 x 4-1/4-in	6.5	25	TRUBOLT 316 S.S. WEDGE ANCHOR
	SWW-1254	1/2 x 5-1/2-in	7.8	25	TRUBOLT 316 S.S. WEDGE ANCHOR
	SWW-5850	5/8x 5-in	4.8	10	TRUBOLT 316 S.S. WEDGE ANCHOR
	SWW-5870	5/8 x 7-in	6.7	10	TRUBOLT 316 S.S. WEDGE ANCHOR

ITW Red Head® Concrete and Masonry Adhesive Anchoring Solutions

Red Head® A7+ Hybrid Adhesive



High strength, quick cure, all purpose,all-weather concrete and masonry anchoring adhesive

- High Strength, Quick Cure, All-Weather ICC-ES ESR-3909 for Cracked Concrete and
- Seismic Approvals
 ICC-ES ESR-3951 for Masonry Approval
 The only Quick-Cure to work in all wet
- conditions!
- Cures in 45 minutes at 70F
- Temp Range: 14F-110F

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
A7P-10	9.5-oz	1.3	6	Red Head A7 + 9.5oz Cartridge w/ Nozzle
A7P-28	28-oz	3.6	4	Red Head A7+ 28oz Cartridge w/ Nozzle
A7P-500KIT	5-oz	1	8	Red Head A7+ 5oz Kit w/ Hand Crank & Nozzle
A7P-501KIT	5-oz	1	8	Red Head A7+ 5oz Kit w/ Reuse Piston & Nozzle
A100		3.1	1	Manual Dispenser for A7P-10
A102-V3		4.7	1	Manual Dispenser for A7P-28
A200		7.7	1	Pneumatic Dispenser for A7P-28
A300		13	1	Battery Dispenser for A7P-28, C6P-30, and G5P-30

Red Head® C6+ Epoxy



Maximum Strength Epoxy

- Maximum Strength, Same-Shift Cure Time, High Temperature
 ICC-ES Cracked Concrete and Seismic
- approvals
- Approved for use in core-drill holes with-out a roughening tool, even in cracked
- out a roughening 1001, even in tracked concrete ICC-ES Masonry Approval Cures in 2 hours at 110F, 2.75 hours at 90f, and 6.5 hours at 70F At least 10 minutes of nozzle life Temp Range: 41F-110F

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
C6P-15	15-oz	2	6	Red Head C6+ 15oz Cartridge w/ Nozzle
C6P-30	30-oz	3.7	4	Red Head C6+ 30oz Cartridge w/ Nozzle
D100		4.9	1	Manual Dispenser for C6P-15 & G5P-15
D102		5.2	1	Manual Dispenser for C6P-30 & G5P-30
D201		5.9	1	Pneumatic Dispenser for C6P-15 & G5P-15
D300		13	1	Battery Dispenser for C6P-15 & G5P-15
A300		13	1	Battery Dispenser for A7P-28, C6P-30, and G5P-3

Red Head® G5+ Epoxy



Everyday Epoxy

- Light-Medium Duty Strength, Moderate Cure Time, Warm Weather ICC-ES Cracked Concrete and Seismic
- Approvals • Cures in 6 hours at 90F and in 4 hours
- at 110F
 At least 10 minutes of nozzle life
- Temp Range: 41F-110F

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
G5P-15	15-oz	2	6	Red Head G5+ 15oz Cartridge w/ Nozzle
G5P-30	30-oz	3.7	4	Red Head G5+ 30oz Cartridge w/ Nozzle
D100		4.9	1	Manual Dispenser for C6P-15 & G5P-15
D102		5.2	1	Manual Dispenser for C6P-30 & G5P-30
D201		5.9	1	Pneumatic Dispenser for C6P-15 & G5P-15
D300		13	1	Battery Dispenser for C6P-15 & G5P-15
A300		13	1	Battery Dispenser for A7P-28, C6P-30, and G5P-30





Adhesives

ADHESIVES



Professional-strength Adhesives. Drywall and subfloor adhesive are available in VOC-compliant water-based and solvent-based formulas.

PART NO.	DESCRIPTION
GDWAV	ADHESIVE, SOLV BASED DRYWALL
GDWAW	ADHESIVE, WATER BASED
GSCSF	SEALANT, SOUND
GSFAV	ADHESIVE, SOLV BASED SUBFLOOR
GSFAW	ADHESIVE, WATER BASED
747	HANGTITE SPRAY ADHESIVE

Firestop

FIRE CAULK



Single component smoke and fire stopping sealant for wall and floor penetrations and other construction gap applications. During a fire, GrabberGard IFC expands to maintain a tight seal against fire and smoke.

GrabberGard IFC expands to maintain a tight seal against fire and smoke.

GrabberGard EFC absorbs heat and provides a fire barrier against fire and smoke.

GrabberGard fire caulks and sprays have been tested in accordance with rigorous industry standards and have been determined to be fungi resistant, low VOC and formaldehyde free.

PART NO.	DESCRIPTION	
GGIFC10	FIRE CAULK 10 oz	GRABBER GARD, INTUMESCENT
GGIFC29	FIRE CAULK, 29oz. CART.	GRABBER GARD, INTUMESCENT
GGEFC20	FIRE CAULK, 20 oz. SAUSAGE	GRABBER GARD, ENDOTHERMIC
GGEFC10	FIRE CAULK, 10.1 oz. CART.	GRABBER GARD, ENDOTHERMIC
GGEFC29	FIRE CAULK, 29 oz.	GRABBER GARD, ENDOTHERMIC
GGFFC20	FIRE CAULK, 20 oz. SAUSAGE	GRARRER GARD, ENDOTHERMIC

Professional Scaffolding and Accessories

GRABBER HAS THE SCAFFOLD AND OTHER JOB-SITE ACCESSORIES YOU NEED







Dump Bins



DUMPCART

STACKABLE • SPACE SAVER • VERSATILE

OUR RUGGED, HIGH DENSITY PLASTIC TRASK CARTS ARE IDEAL FOR HANDLING THE DEBRIS ON ANY JOB SITE.

- ► FITS THROUGH STANDARD DOORWAYS AND ELEVATORS
- **▶ QUICK AND EASY ASSEMBLY**
- ► SAVE FREIGHT WITH HIGH STACKABLE FEATURE



Hinged Lid Allows Easy Access to Contents Without Removal

- FIndustrial-strength
- Transport heavy loads with ease
- Easy to maneuver
- Dumping can be performed by single user
- Smooth surface is easy to clean and resists pitting / corrosion.

Dump Cart

3/4 W/12" WHEELS (1 yard covered capacity)
800lbs CAPACITY
Item# CAS12 (12" wheel)
Item# CAS5P (5" steering caster)

PART NO.	DESCRIPTION
DUC100-10	3/4 CUBIC YARD DUMP CART WITH 10" WHEELS
DUC100-12	3/4 CUBIC YARD DUMP CART WITH 12" WHEELS
DUC100-R	3/4 CUBIC YARD DUMP CART WITH REINFORCING FRAME
DUC100-H	3/4 CUBIC YARD DUMP CART WITH FULL FRAME



Lasers

Brand Name Precision Lasers

GRABBER HAS THE LASERS YOU DEPEND ON — BRANDS YOU TRUST

- ▶ Green Lasers
- ▶ Red Lasers
- ► Cross line
- ▶ Vertical

- ▶ Horizontal
- ▶ Two, Three and 5-Beam
- **▶** Pointer
- ▶ Multi-Purpose
- ▶ Self Leveling
- ▶ 360° reference















PACIFIC LASER SYSTEMS® • TRIMBLE® • DEWALT®

Coatings and finishes

Black/Gray Phosphate

Salt spray results ASTM B117 24 hours, no red rust

Clear Zinc

Salt spray results ASTM B117 12 hours, no red rust

Recommended for interior applications and exterior applications where the fastener will be encapsulated, I.e. the attachment of lathing prior to at the application of stucco.

Yellow Zinc

Salt spray results ASTM B117 24 hours, no red rust

Recommended for interior applications and exterior applications where the fastener will be encapsulated, i.e. the attachment of lathing prior to at the application of stucco.



Salt spray results ASTM B117 1000 hours, 15 cycles Kesternich per DIN 50018, no red rust

GrabberGard® metal finish is a high-grade proprietary metal surface processing technology that prevents corrosion. It is a duplex coating constituting a zinc substrate and organic polymer topcoat. These layers are bonded together through thermal fusion, and this unique method of combining layers results in a combination of the coating films. GrabberGard® treatment does not attribute its anti-corrosion properties to any single material when combined has superb corrosion resistant qualities. Suitable for use in non coastal areas with all pressure treated lumbers including ACQ.



GrabberGard $^{\circ}$ I5 — Salt spray results ASTM B117 1500 hours, 20 cycles Kesternich per DIN 50018, no red rust

GrabberGard® metal finish is a high-grade proprietary metal surface processing technology that prevents corrosion. It is a ROHS compliant coating constituting a Hex valent chrome free zinc substrate and organic polymer topcoat. The distinguishing feature of GrabberGard® 15 is the joining and encapsulation the substrate with the fused organic surface coating. GrabberGard® 15 treatment does not attribute its anti-corrosion properties to any single material, but the synergy of these two layers, which when combined has superb corrosion resistant qualities. Suitable for use between 1km and 50km from the ocean, or from 150m to 1km from a salt water inlet or creek, and with all pressure treated lumbers including ACQ, may be used with Aluminum without galvanic reaction.



Salt spray results ASTM B117 1000 hours, no red rust

Type 302 stainless steel is an extremely tough, ductile grade that demonstrates superior corrosion resistance compared to 400 series, or zinc plated fasteners. This grade as well as the rest of the 300 series we offer can be used in MRI and other applications calling out non-magnetic parts. Suitable for exterior grade that is not in coastal areas when used in conjunction with untreated wood, MCQ, CCA or Borate and other NON ACQ treated lumber.



305 Stainless Steel Non-Coastal Grade

Type 305 stainless steel is a nickel chromium austenitic grade of stainless steel and is inherently non-magnetic. This material is not hardened by heat treatment and provides very good corrosion protection. Suitable for exterior grade that is not in coastal areas when used in conjunction with treated or untreated wood, including ACQ.



316 Stainless Steel Marine Grade

Type 316 stainless steel is a nickel chromium austenitic grade of stainless steel and is inherently non-magnetic. This material provides the highest level of corrosion protection. This austenitic stainless steel has an increased molybdenum content to increase its resistance to corrosion when compared to other 300 series alloys. It is suitable for use in coastal areas and is considered Marine grade stainless. Suitable for exterior grade in coastal areas, and around pools and spas, acidic conditions, and can be used in conjunction with treated or untreated wood, including ACQ.



Mechanical Galvanized

Mechanical Galvanizing results in a very uniform coating thickness reducing thread fit issues at assembly, making it a preferable coating for structural applications. Not only does Mechanical Galvanizing provide excellent coating uniformity, but the process is consistent from batch to batch. Mechanical Galvanizing is a room temperature process in which zinc coatings are applied to fasteners without the electricity used for electroplating, and without heat used for Hot-Dip Galvanizing. This eliminates hydrogen embrittlement issues, and tempering issues with hardened fasteners, the room temperature process ensures no chance of re-tempering or softening high strength fasteners and guards against hydrogen embrittlement because the fasteners are also never exposed to acid pickling in the process. All exposed surfaces can be coated very uniformly, and are processed to minimize thread nicking. The requirements for Mechanical Galvanizing are covered in ASTM B695, "Coatings of Zinc Mechanically Deposited on Iron and Steel" and are applied to a Class 55 thickness (.0022"), to provide you with the corrosion protection you expect from Galvanized products.



Grabber DRIVAL® fasteners are protected against hydrogen embrittlement failure.

Hydrogen embrittlement (HE) refers to any time-delayed failure mechanism that is aggravated or accelerated because of the presence of hydrogen. Most self-drilling fasteners are case-hardened, which provides the necessary hardness for drilling and tapping, but leaves the screws vulnerable to (HE) due to their high surface hardness and the opportunity for introduction of hydrogen during the electroplating and cold working manufacturing processes.

DRIVAL® fasteners are specially designed and processed to help prevent hydrogen-induced brittle failures. Each fastener undergoes a post plating baking process to ensure the optimal combination of hardness and hydrogen relief required for maximum performance in the field.

Testing of this product, in accordance with ASTM standards, has proven that DRIVAL® fasteners provide the same resistance to hydrogen embrittlement (HE) failure as a grade 5 fastener. Grabber's hardening and baking processes provide unmatched performance.

Grabber has you covered with more than just great fastening products. . .

To put it simply, Grabber can help you build a better product while simultaneously making you more money. Through constant innovation, Grabber continues to simplify the way you work by providing the best, most technologically advanced products available today.



Drywall Screws
Metal Framing Screws
Concrete Anchors
Pneumatic Nails

Fasten it

Grabber has a full line of fasteners for just about any application. From drywall screws to heavy gauge framing screws Grabber has what you need. Grabber invented the drywall screw and changed an entire industry. For the past 40 years Grabber has been the name you can trust for professional grade fasteners.



SuperDrive Screw Guns Chop Saws Lasers

Drive it

Grabber's SuperDrive tool is designed to make driving screws faster and more accurate. Along with SuperDrive, Grabber offers many other tools that make your work easier including chop saws, routers, lasers and more.



Subfloor Adhesives Drywall Adhesives Acoustical Sealants Fire Stopping Caulks

Caulk it

Grabber offers a complete line of caulks including sound control sealants, subfloor adhesives, drywall adhesives, insulation foam and more. Grabber also offers EFC and IFC fire stopping caulks and sealants.



NO-COAT® Stick Products NO-COAT® Flexible Corner 325 & 450 AQUABEAD® Drywall Tape

Finish it

Grabber has everything you need for finishing your drywall projects. From fiberglass mesh tape and spark perforated drywall tape to the innovative No-Coat® structural drywall system, Grabber has what you need to do the job right.

Quality every step of the way. . . the reason the pros choose Grabber

Grabber sweats the small stuff, and that makes all the difference

The professional's first choice for over 50 years, Grabber premium quality screws are built for performance. Sharper threads mean a better driving experience so Grabber changes thread dies more frequently. Tight recesses mean screws are less likely to cam-out and bit tips will last longer so Grabber changes recess dies more frequently. Consistent heat treating means screw heads will be less likely to pop off, so Grabber heat treats fewer screws at a time ensuring more even heat treatment. These are small things most people don't notice, but they are also small things that make the difference between average fasteners and professional grade fasteners.

Grabber is an international distributor of premium fasteners and fastening systems for wood, metal, drywall, sheathing, and acoustical applications in the commercial and residential construction markets. Grabber is home to the Deckmaster® Hidden Fastening System, the patented LOX® Drive System, and the SuperDrive Auto-Feed Fastening System. Grabber also distributes a wide range of proprietary tools and accessories, various equipment, and building materials to the construction industry.



Visit www.grabberman.com or call 800-477-8876 to find a dealer near you.

Grabber screws and drywall nails are ICC ES (International Code Council Evaluation Service) evaluated, and engineered to meet or exceed the specifications for use, as prescribed in International Building Code® (IBC) 2015, 2012, 2009 and 2006 and International Residential Code® (IRC) 2015, 2012, 2009 and 2006. ASTM reports, approvals, shear, pullout and other technical information is available at www.grabberman.com

Grabber screws and nails are produced in an ISO 9001 certified manufacturing environments. Grabber also supports a complete line of US manufactured construction fasteners that can meet "Buy American" and the "American Reinvestment and Recovery Act" requirements. GrabberGard® exterior grade coated fasteners are rated for use in ACQ, pressure and fire treated lumber.







