

2018 Pneumatic Catalog

- › Pneumatic Nailers & Staplers
- › Cordless & Gas Nailers
- › Compressors
- › Fasteners



NR83A5

3-1/4" Plastic Collated
Framing Nailer

NEW!

Compact 3.0Ah Lithium Ion Batteries



Upgraded Battery Upgraded Performance

Included with Hitachi
Cordless Nailers


1 Smaller Size



2 Less Weight



3 More Runtime

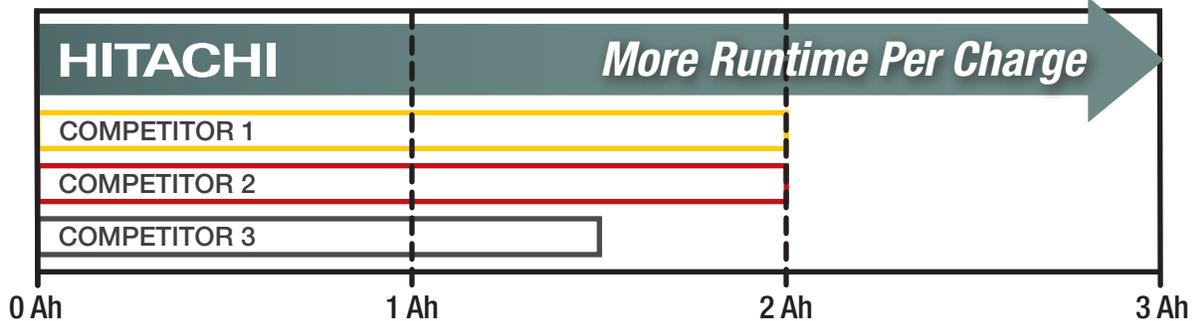

AVAILABLE WITH:



See page 12-13 for details

Total Freedom

with the PREFERRED PRO BRAND OF NAILERS*

CORDLESS FRAMING NAILERS



21°
ROUND HEAD NAIL

NR1890DR
3-1/2" Plastic Strip Collated Nailer

- 37 Nail Capacity
- 2" to 3-1/2" Nails

**NO GAS!
NO HOSE!**
NO NOISY COMPRESSOR

FEATURES

- Highly Efficient Brushless Motor
- High & Stable Driving Power
- Dry Fire Lockout
- Battery Charge Indicator
- Tool-Less Depth of Drive
- Retractable Hook



30°
CLIPPED HEAD NAIL

NR1890DC
3-1/2" Paper Strip Collated Nailer

- 47 Nail Capacity
- 2" to 3-1/2" Nails

Featuring Hitachi's AIR SPRING DRIVE SYSTEM

Similar performance as a pneumatic nailer!

Uses Compressed Air to Drive Each Nail

- Zero ramp up time
- 2-3 nails per second
- Recoil that feels like a pneumatic nailer
- No refilling of air tank required*

* Air tank does not require refill unless there is a malfunction of material components that require service center attention

CORDLESS FINISH NAILERS



15 GA
ANGLED NAIL

NR1865DMA
15Ga Angled Finish Nailer

- 1,100 Nails Per Charge
- 1-1/4" to 2-1/2" Nails



16 GA
STRAIGHT NAIL

NR1865DM
16Ga Finish Nailer

- 1,500 Nails Per Charge
- 1" to 2-1/2" Nails



18 GA
BRAD NAIL

NR1850DE
18Ga Brad Nailer

- 1,650 Nails Per Charge
- 5/8" to 2" Nails

- Selective or Bump Fire Modes
- Tool-Less Depth of Drive
- Integrated Belt Hook
- LED Light

See page 12-13 for further details

NEW! Safety Glasses



Part #402317

CLEAR

- Nose pad
- Ear pad



Part #402318

GRADUATED TINT

- Ear pad



Part #402319

TINTED

- Nose pad
- Temple extension

30-DAY SATISFACTION GUARANTEE

All Hitachi Koki USA and CANADA products (hereinafter the "Hitachi Koki Product/s") are inspected before they leave the factories to ensure the highest quality for all customers. If you are not satisfied with any Hitachi Koki product within 30 days of purchase, please return the product, complete with retail packaging and components, with receipt to the original place of purchase for a refund or replacement. This guarantee covers power tools only (excludes 2-cycle & 4-cycle gas powered equipment, which carry a 10-day Satisfaction Guarantee). See the Hitachi Koki "Limited Warranty" for accessories, parts and further warranty information.

PROFESSIONAL 5-YEAR LIMITED WARRANTY

This warranty extends to the original purchaser of the Hitachi Koki Product. Hitachi Koki products are warranted to the original purchaser to be free from defect in materials and workmanship for a period of five (5) years from the original purchase date. (See exceptions below)

EXCEPTIONS INCLUDE:

LIFETIME LITHIUM ION TOOL WARRANTY

The product categories listed below are warranted to the original purchaser to be free from defect in materials and workmanship for a lifetime from the original purchase date. Lifetime is defined as the serviceable life of the product. This is defined as the period during which all components are available.

- Cordless Lithium Ion Band Saws • Cordless Lithium Ion Blowers • Cordless Lithium Ion Circular Saws • Cordless Lithium Ion Driver Drills • Cordless Lithium Ion Hammer Drills
- Cordless Lithium Ion Impact Drivers • Cordless Lithium Ion Impact Wrenches • Cordless Lithium Ion Jig Saws • Cordless Lithium Ion Mini Grinders • Cordless Lithium Ion Nailers
- Cordless Lithium Ion Nibblers • Cordless Lithium Ion Oscillating Tools • Cordless Lithium Ion Planers • Cordless Lithium Ion Reciprocating Saws
- Cordless Lithium Ion Right Angle Drills • Cordless Lithium Ion Shears

TWO YEAR WARRANTY

The product categories listed below are warranted to the original purchaser to be free from defect in materials and workmanship for a period of two (2) years from the original purchase date.

- Benchtop Band Saws • Benchtop Belt & Disc Sanders • Benchtop Metal Dry-Cut Saws • Benchtop Drill Presses • Benchtop Planers • Benchtop Scroll Saws • Lithium Ion Batteries • Table Saws

ONE YEAR WARRANTY

The product categories listed below are warranted to the original purchaser to be free from defect in materials and workmanship for a period of one (1) year from the original purchase date.

- Air Compressors • Chargers • Concrete Cutters • Corded Grinders • Corded Hammer Drills • Corded Rotary Hammers • Corded Vacuums • Cordless Gas Powered Nailers
- Cordless Grinders • Cordless Lithium Ion Vacuums • Cordless Rotary Hammers • Demolition Hammers • Gas Powered Cut Off Saw • Generators • Heat Guns • NiCd & NiMH Batteries • Portable Cut Off Saws • Radios • Reserve Air Tank • SuperDrive

90-DAY WARRANTY

The product categories listed below are warranted to the original purchaser to be free from defect in materials and workmanship for a period of ninety (90) days from the original purchase date.

- Bumpers • Driver Blades • Hammer Tackers • O-Rings

30-DAY WARRANTY

The product category listed below is warranted to the original purchaser to be free from defect in materials and workmanship for a period of thirty (30) days from the original purchase date.

- Accessory Products (Excludes Fasteners)

Warranty coverage is conditioned upon the purchaser furnishing Hitachi Koki or its Authorized Service Center with adequate written proof of the original purchase date.

OWNER'S REGISTRATION CARD

The return of the Owner's Registration Card (whether by mail or online) by the original purchaser within (10) days after the original purchase date is not a condition precedent to coverage under this warranty.

WARRANTY COVERAGE

This Hitachi Koki Product is warranted by Hitachi Koki U.S.A., Ltd., against defective materials or workmanship.

This warranty is void if: defects in materials or workmanship or damages result from repairs or alterations which have been made or attempted by others or the unauthorized use of nonconforming parts; the damage is due to normal wear and tear, the damage is due to abuse (including overloading of the Hitachi Koki Product beyond capacity), failure to operate the unit in the manner specified by the owners manual, improper maintenance, improper set up or altered products, neglect or accident, improper adjustments, operation at engine speeds above Hitachi Koki recommendations, operation of product with incorrect fuel to oil ratio, failures due to contaminated fuel, cutting attachments i.e.: nylon line, blades etc: or the damage is due to use of the Hitachi Koki Product after partial failure or use with improper accessories.

This warranty does not cover repair or replacement of maintenance items including but not limited to, hoses, spark plugs, starter rope, air and fuel filters, clutch shoes, vibration isolators, throttle cables, lubricants, belts and all cutting attachments, etc. Normal maintenance and adjustments to the magneto, carburetor, and spark plugs are not considered the responsibility of Hitachi Koki under this warranty.

WARRANTY PERFORMANCE

DURING THE ABOVE WARRANTY PERIOD, SHOULD YOUR HITACHI KOKI PRODUCT EXHIBIT A DEFECT IN MATERIALS OR WORKMANSHIP, SUCH DEFECT WILL BE REPAIRED WHEN THE COMPLETE HITACHI KOKI PRODUCT AND PROOF OF PURCHASE IS RETURNED, POSTAGE PREPAID AND INSURED, TO A HITACHI KOKI AUTHORIZED SERVICE CENTER. OTHER THAN THE POSTAGE AND INSURANCE REQUIREMENT, NO CHARGE WILL BE MADE FOR REPAIRS COVERED BY THIS WARRANTY.

WARRANTY DISCLAIMERS

NO WARRANTY, ORAL OR WRITTEN, EXPRESSED OR IMPLIED, OTHER THAN THE ABOVE WARRANTY IS MADE WITH REGARD TO THIS HITACHI KOKI PRODUCT. HITACHI KOKI DISCLAIMS ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR USE OR PURPOSE, AND ALL OTHER WARRANTIES. IN NO EVENT SHALL HITACHI KOKI BE LIABLE FOR ANY INCIDENTAL, SPECIAL, CONSEQUENTIAL OR PUNITIVE DAMAGES, OR FOR ANY COSTS, ATTORNEY FEES, EXPENSES, LOSSES OR DELAYS ALLEGED TO BE AS A CONSEQUENCE OF ANY DAMAGE TO, FAILURE OF, OR DEFECT IN ANY PRODUCT INCLUDING, BUT NOT LIMITED TO, ANY CLAIMS FOR LOSS OF PROFITS.

LIMITATIONS ON WARRANTY DISCLAIMERS

Some states do not allow limitations on how long an implied warranty lasts, so the above limitations may not apply to you. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

Please consult Hitachi Koki's website for USA: www.hitachipowertools.com 1-800-829-4752 and for CANADA: www.hitachipowertools.ca 1-800-970-2299 to locate your nearest service facility for warranty and non-warranty service on a Hitachi Koki Product.



FRAMING / STRIP NAILER QUICK REFERENCE

Model	Type	Collation	Magazine Angle	Magazine Capacity	Fastener Range				Tool-less Depth	Weight (lbs)	Page
					Length		Diameter				
					Min	Max	Min	Max			
NR38AK	Pneumatic	Paper	36°	29	1-1/2"	1-1/2"	.131	.148	N/A	4.6	9
NR65AK2	Pneumatic	Paper	36°	44	1-1/2"	2-1/2"	.131	.162	N/A	6.4	9
NR65AK2(S)	Pneumatic	Paper	36°	22	1-1/2"	2-1/2"	.131	.162	N/A	5.7	9
NR83A5	Pneumatic	Plastic	21°	70	2"	3-1/4"	.113	.131	Yes	9.1	5
NR83A5(S)	Pneumatic	Plastic	21°	70	2"	3-1/4"	.113	.131	N/A	9.1	5
NR90AE(S1)	Pneumatic	Plastic	21°	70	2"	3-1/2"	.113	.148	Yes	7.5	5
NR90AC5	Pneumatic	Plastic	21°	70	2-3/8"	3-1/2"	.113	.162	No	8.9	5
NR83AA5	Pneumatic	Paper	30°	94	2"	3-1/4"	.113	.131	N/A	9.3	6
NR90AD(S1)	Pneumatic	Paper	30°	94	2"	3-1/2"	.113	.148	Yes	7.0	6
NR90AF(S1)	Pneumatic	Wire	28°	100	2"	3-1/2"	.113	.131	Yes	7.3	6
NR90GC2	Gas	Paper	30°	37	2"	3-1/2"	.113	.131	No	7.7	15
NR90GR2	Gas	Plastic	21°	35	2"	3-1/2"	.113	.131	No	7.9	15
NR1890DR	Cordless	Plastic	21°	37	2"	3-1/2"	.113	.131	Yes	10.8	13
NR1890DC	Cordless	Paper	30°	47	2"	3-1/2"	.113	.131	Yes	10.6	13

COIL NAILER QUICK REFERENCE

Model	Application	Collation	Magazine Angle	Magazine Capacity	Fastener Range				Magazine Loading	Actuation	Weight (lbs)	Page
					Length		Diameter					
					Min	Max	Min	Max				
NV45AB2	Roofing	Wire	16°	120	7/8"	1-3/4"	-	.120	Side	Contact	5.5	7
NV50A1	Utility Nailer	Wire	16°	400	1-1/4"	2"	-	.083	Bottom	Contact	4.2	7
NV65AN	Pallet Nailer	Wire	16±1°	200-300	1-1/2"	2-1/2"	.080	.099	Side	Contact	5.7	7
NV65AH2	Siding Nailer	Wire / Plastic	16°/15°	200-300	1-1/2"	2-1/2"	.090	.099	Side	Contact	4.6	7
NV75AN	Siding/Light Framing	Wire / Plastic	16±1°	200-300	1-3/4"	3"	.099	.131	Side	Contact	6.3	8
NV75AN(S1)	Pallet Nailer	Wire / Plastic	16±1°	200-300	1-3/4"	3"	.099	.131	Side	Sequential	6.3	8
NV83A5	Framing	Wire	16°	200-300	2"	3-1/4"	.099	.131	Side	Selective	9.1	8
NV90AG(S)	Framing	Wire	16°	200-300	1-3/4"	3-1/2"	.099	.131	Side	Selective	7.7	8

FINISH NAILER QUICK REFERENCE

Model	Type	Angle	Fastener Range			Page
			Min	Max	Gauge	
NP35A	Pneu.	Straight	5/8"	1-3/8"	23	10
NP18DSAL	18V	Straight	5/8"	1-3/8"	23	14
NT50AE2(S)	Pneu.	Straight	5/8"	2"	18	10
NT1850DE	18V	Straight	5/8"	2"	18	14
NT50GSP9	Gas	Straight	5/8"	2"	18	16
NT1865DM	18V	Straight	1"	2-1/2"	16	14
NT65GSP9	Gas	Straight	1"	2-1/2"	16	16
NT65M2(S)	Pneu.	Straight	1"	2-1/2"	16	9
NT1865DMA	18V	34°	1-1/4"	2-1/2"	15	14
NT65GAP9	Gas	34°	1-1/4"	2-1/2"	15	15
NT65MA4(S)	Pneu.	34°	1-1/4"	2-1/2"	15	9



NR83A5 NR83A5(S)


3-1/4" Plastic Strip Collated Framing Nailer



NR83A5(S)
Without Depth
Adjustment

- Tool-less depth or drive adjustment for flush fastening in varying materials (NR83A5 only)
- Selective actuation on trigger allows for either sequential or contact nailing
- Cylinder valve drive system for rapid response and increased durability
- Rubber grip for control and comfort during use
- Rafter hook included for convenience

Plastic Strip Collation, 21°



Specifications

Nail Capacity	64
Magazine Angle	21°
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	9.1 lbs

Includes

Safety Glasses	875769
----------------	--------

Optionals

No Mar Nose Cap	884080
-----------------	--------




NR90AE(S1)

3-1/2" Plastic Strip Collated Framing Nailer



- New head guard design for quicker disassembly during tool maintenance
- Lightweight and well-balanced for easy maneuverability
- Tool free depth of drive adjustment to flush drive or countersink into varying material
- Selective actuation for either sequential or "bump" fire nailing with a simple flip of a switch for tool-less transitions

Plastic Strip Collation, 21°



Specifications

Nail Capacity	64-70
Magazine Angle	21°
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	7.5 lbs

Includes

Safety Glasses	875769
----------------	--------

Optional

No Mar Nose Cap	886401
-----------------	--------




NR90AC5

3-1/2" Plastic Strip Collated Framing Nailer



- Well-balanced for ease of maneuverability and less user fatigue
- Selective actuation switch allows for quick transitions between sequential and contact nailing with the simple flip of a switch
- Tool free depth of drive adjustment to flush drive or countersink into varying material
- Two-step nail loading makes fastener replenishment quick and easy, reducing downtime

Plastic Strip Collation, 21°



Specifications

Nail Capacity	64
Fastener Length	2-3/8" - 3-1/2"
Fastener Diameter	.113" - .162"
Magazine Angle	21° +/- 1°
Collation	Plastic
Fitting	1/4" Industrial
Operating Pressure	70 - 120 PSI
Weight	8.9 lbs

Includes

Safety Glasses	
Rafter Hook	



3-1/4" Paper Collated Framing Nailer

NR83AA5



Specifications

Nail Capacity	86-94
Magazine Angle	30°
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	9.3 lbs


Includes

Safety Glasses	875769
----------------	--------

Optional

No Mar Nose Cap	882981
-----------------	--------

Paper Strip Collation,
Clipped & Offset Round Head, 30°



- Selective actuation on trigger allows for either sequential or contact nailing
- Cylinder valve drive system for rapid response and increased durability
- Open nose design for easy extraction should a nail jam
- Rafter hook included for convenience



3-1/2" Paper Collated Framing Nailer

NR90AD(S1)



Specifications

Nail Capacity	86-94
Magazine Angle	35°
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	7.0 lbs


Includes

Safety Glasses	875769
----------------	--------

Optional

No Mar Nose Cap	886401
-----------------	--------

Paper Strip Collation,
Clipped & Offset Round Head, 30°



- New head guard design for quicker disassembly during tool maintenance
- Lightweight and well-balanced for easy maneuverability
- Tool free depth of drive adjustment to flush drive or countersink into varying material
- Selective actuation for either sequential or "bump" fire nailing with a simple flip of a switch for tool-less transitions



3-1/2" Wire Weld Framing Nailer

NR90AF(S1)



Specifications

Nail Capacity	100
Magazine Angle	28°
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	7.3 lbs


Includes

Safety Glasses	875769
----------------	--------

Optional

No Mar Nose Cap	886401
-----------------	--------

Wire Weld Collation,
Offset Round Head, 28°



- New head guard design for quicker disassembly during tool maintenance
- Selective actuation for either sequential or "bump" fire nailing with a simple flip of a switch for tool-less transitions
- Tool-free depth of drive adjustment provides simplicity and flexibility for perfectly flush fastening in various materials
- Dry-fire lockout prevents the nailer from firing when nail count is too low



3-1/2" Palm Nailer

NH90AB




Specifications

Nail Capacity	1
Fitting	1/4" Industrial
Operating Pressure	80-100 psi
Weight	1.3 lbs

Includes

Safety Glasses	875769
----------------	--------

Bulk Nails



- Rubber grip for added comfort and reduced vibration
- 360° swivel plug for maximum flexibility
- Magnetic nose holds nail securely for precise fastener placement
- Drives most common bulk nails including finish, framing and timber






NV45AB2

1-3/4" Coil Roofing Nailer



- Side loading magazine, convenient and easy for quick replenishment
- Tool-less depth of drive adjustment for precision nailing/flush driving
- Carbide tipped push lever reduces wear
- Pneumatic nail feed mechanism powers both the nail advance and return for consistent operation even in the harshest of conditions

Coil, Wire Collation, 16°



Specifications

Nail Capacity	120
Magazine Angle	16°
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	5.5 lbs

Includes

Safety Glasses	875769
Magazine Shingle Guide Assembly	883370

Optional

Sequential Trip Mechanism	878226
Power Pack Set	877908




NV50A1

2" Coil Utility Nailer



- High capacity canister holds up to 400 nails for less downtime
- Open magazine canister to quickly check nail quantity
- Angled magazine for ease of use in corner applications
- Plastic shield deflects wire collation for added safety

Coil, Wire Collation, 16°



Specifications

Nail Capacity	400
Magazine Angle	16°
Air Inlet	3/8"
Operating Pressure	70-120 psi
Weight	4.2 lbs

Includes

Safety Glasses	875769
Hex Bar Wrench (3mm)	943277
Hex Bar Wrench (4mm)	944458



NV65AH2


2-1/2" Coil Siding Nailer



- Drives both wire collated and plastic sheet collated nails for added flexibility
- Tool-less depth of drive adjustment for precision nailing/flush driving
- Plastic shield deflects wire collation for added safety
- Adjustable air deflector directs the air exhaust in any direction

Coil, Wire-16°/Plastic-15° Collation

.090 - .099



Specifications

Nail Capacity	200-300
Magazine Angle	16° (Wire) / 15° (Plastic)
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	4.9 lbs

Includes

Safety Glasses	875769
No Mar Nose Cap	878344
Hex Bar Wrench (3mm)	943277
Hex Bar Wrench (4mm)	944458
Hex Bar Wrench (5mm)	944459



NV65AN


2-1/2" Coil Pallet Nailer



- 360° adjustable air deflector directs the air exhaust in any direction and away from the user
- Side load magazine for fast and easy reloads
- Open nose design for easy jam removal
- Clear plastic shield deflects wire collation away from the user for added safety
- Lightweight and well balanced at just 5.9 lbs. for less fatigue

Coil, Wire Collation, 16°

.080 - .099



Specifications

Nail Capacity	200-300
Magazine Angle	16±1°
Fitting	1/4" Industrial
Operating Pressure	80-120 psi
Weight	5.9 lbs

Includes

Safety Glasses	875769
Sequential Trip Mechanism	888451

3" Coil Siding/Framing Nailer

NV75AN



Specifications


Nail Capacity	200-300
Magazine Angle	16°±1
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	6.3 lbs

Includes

Safety Glasses	875769
Sequential Trip Mechanism	888451

Coil, Wire-16°/Plastic-15°

Collation
.090 - .131



- Drives both wire collated and plastic sheet collated nails for added flexibility
- Tool-less depth of drive adjustment for precision nailing/flush driving
- 360° adjustable air deflector directs the air exhaust away from the user
- Side load magazine for fast and easy reloads
- Plastic shield deflects wire collation for added safety



3" Coil Pallet Nailer

NV75AN(S1)



Specifications


Nail Capacity	200-300
Magazine Angle	16°±1
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	6.3 lbs

Includes

Safety Glasses	875769
Sequential Trip Mechanism	888451

Coil, Wire Collation, 16°

.099 - .131



- Drives both wire collated and plastic sheet collated nails for added flexibility
- Tool-less depth of drive adjustment for precision nailing/flush driving
- 360° adjustable air deflector directs the air exhaust away from the user
- Side load magazine for fast and easy reloads
- Plastic shield deflects wire collation for added safety



3-1/4" Coil Framing Nailer

NV83A5



Specifications


Nail Capacity	200-300
Magazine Angle	16°
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	9.1 lbs

Includes

Safety Glasses	875769
----------------	--------

Coil, Wire Collation, 16°

.099 - .131



- Tool-less depth or drive adjustment for flush fastening in varying materials
- Selective actuation on trigger allows for either sequential or contact nailing
- Cylinder valve drive system for rapid response and increased durability
- Side load pop-out magazine for fast and easy reloads
- Open nose design for easy nail removal
- Rafter hook included for convenience



3-1/2" Coil Framing Nailer

NV90AG(S)



Specifications

Nail Capacity	200-300
Magazine Angle	16°
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	7.7 lbs

Includes


Safety Glasses	875769
----------------	--------

Optional

No Mar Nose Cap	883106
-----------------	--------

Coil, Wire Collation, 16°

.099 - .131



- New head guard design for quicker disassembly during tool maintenance
- Selective actuation switch allows for either sequential or contact nailing with the simple flip of a switch
- Tool-less depth of drive dial adjusts for flush fastening in varying materials
- Side load, tilt bottom magazine for fast and easy reloads





NR38AK


1-1/2" Strap-Tite® Fastening System Strip Nailer



- Narrow design for ease of use in tight spaces
- Sequential firing mechanism ensures precision nail placement
- Unique positive safety allows tool to use nails as a guide without damaging collation

Paper Strip Collation, 36°

.131 - .148



1-1/2"



Specifications

Nail Capacity	29
Magazine Angle	36°
Fitting	1/4" Industrial
Operating Pressure	80-120 psi
Weight	4.6 lbs

Includes

Safety Glasses	875769
----------------	--------



NR65AK2 NR65AK2(S)


2-1/2" Strap-Tite® Fastening System Strip Nailer



- Narrow design for ease of use in tight spaces
- Sequential firing mechanism ensures precision nail placement
- Unique positive safety allows tool to use nails as a guide without damaging collation

Paper Strip Collation, 36°

.131 - .162



1-1/2"

2-1/2"



Specifications

Nail Capacity	44
Nail Capacity NR65AK2(S)	22
Magazine Angle	36°
Fitting	1/4" Industrial
Operating Pressure	80-120 psi
Weight	6.4 lbs
Weight NR65AK2(S)	5.7 lbs

Includes

Safety Glasses	875769
----------------	--------

Optional

Long Magazine Assembly	883456
Short Magazine Assembly	883469

NR65AK2(S)
Short Magazine



NT65MA4(S)

2-1/2" 15-Gauge Angled Finish Nailer with Air Duster



- Equipped with a non-slip elastomer grip trigger and ergonomically designed simple flip actuation switch
- Integrated air duster button allows air from the compressor to clear away dust and debris from the work surface in preparation for the nail
- Selective actuation switch lets the user easily select bump fire or sequential fire modes
- Depth of drive adjustment for accurate nail depth in varying materials

15-Gauge, 34°

1-1/4"

2-1/2"

Specifications

Nail Capacity	100
Magazine Angle	34°
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	4.2 lbs

Includes

Safety Glasses	875769
No Mar Tip	881751
Case	884340



NT65M2(S)

2-1/2" 16-Gauge Finish Nailer with Air Duster



- Equipped with a non-slip elastomer grip trigger and ergonomically designed simple flip actuation switch
- Integrated air duster button allows air from the compressor to clear away dust and debris from the work surface in preparation for the nail
- Selective actuation switch lets the user easily select bump fire or sequential fire modes
- Depth of drive dial allows the user to easily adjust the drive depth for a professional finish

16-Gauge

1"

2-1/2"

Specifications

Nail Capacity	100
Magazine Angle	Straight
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	3.7 lbs

Includes

Safety Glasses	875769
No Mar Tip	881751
Case	885676

2" 18-Gauge Finish Nailer

NT50AE2(S)




Specifications

Nail Capacity	100
Magazine Angle	Straight
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	2.2 lbs

Includes

Safety Glasses	875769
No Mar Tip	885887
Case	885902



- Equipped with a non-slip elastomer grip trigger and ergonomically designed simple flip actuation switch
- Selective actuation switch lets the user easily select bump fire or sequential fire modes
- Tool-less, easy-to-clear nose for quick and simple nail extraction should a nail jam during use
- Depth of drive dial allows the user to easily adjust the drive depth for a professional finish



1-3/8" 23-Gauge Pin Nailer

NP35A




Specifications

Nail Capacity	100
Magazine Angle	Straight
Fitting	1/4" Industrial
Operating Pressure	65-100 psi
Weight	2.0 lbs

Includes

Safety Glasses	875769
(2) No Mar Tips	884681
Pneumatic Lubricant	877153
Hex Bar Wrench (3mm)	887573
Case	887572

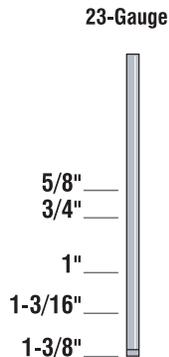

- Large fastener capacity for fewer reloads
- Dual trigger for safe & accurate placement of pins
- Depth of drive adjustment for flush drives into a variety of materials



1/4" Narrow Crown Stapler

N3804AB3(S)




Specifications

Staple Gauge	18
Staple Capacity	125
Magazine Angle	Straight
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	2.3 lbs

Includes

Safety Glasses	875769
No Mar Tip	885969
Case	885902



- Equipped with a non-slip elastomer grip trigger and ergonomically designed simple flip actuation switch
- Selective actuation allows transition from single actuation to contact actuation
- Tool free depth adjustment allows for a professional finish with varying materials - simply dial in the desired depth and efficiently finish the job
- Tool-less, easy to clear nose for quick and simple staple extraction



7/16" Standard Crown Stapler

N5008AC2



Specifications


Staple Gauge	16
Staple Capacity	157
Magazine Angle	Straight
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	4.4 lbs

Includes

Safety Glasses	875769
Hex Bar Wrench (4mm)	944458

Optional

Sequential Trip Mechanism	876762
---------------------------	--------



- High capacity magazine allows for fewer staple replenishments
- Quick-clear jam release increases user efficiency
- Cylinder Valve firing mechanism provides quick response and rapid driving
- Depth of drive adjustment to countersink or flush drive staples






N5010A

1/2" Standard Crown Stapler



- High capacity magazine allows for fewer staple replenishments
- Cylinder Valve firing mechanism provides quick response and rapid driving
- Depth of drive control for flush drives into various materials
- Tool-less, easy to clear nose for quick and simple staple extraction



Specifications

Staple Gauge	16
Staple Capacity	150
Magazine Angle	Straight
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	4.4 lbs

Includes

Safety Glasses	875769
Hex Bar Wrench (4mm)	944458

Optional

Sequential Trip Mechanism	876762
---------------------------	--------




N5021A

15/16" Wide Crown Stapler



- High capacity magazine allows for fewer staple replenishments
- Cylinder Valve firing mechanism provides quick response and rapid driving
- Depth of drive control for flush drives into various materials
- Tool-less, easy to clear nose for quick and simple staple extraction



Specifications

Staple Gauge	16
Staple Capacity	150
Magazine Angle	Straight
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	4.7 lbs

Includes

Safety Glasses	875769
----------------	--------

Optional

Sequential Trip Mechanism	876762
---------------------------	--------




N5024A2

1" Wide Crown Stapler



- High capacity magazine allows for fewer staple replenishments
- Cylinder Valve firing mechanism provides quick response and rapid driving
- Depth of drive control for flush drives into various materials
- Tool-less, easy to clear nose for quick and simple staple extraction



Specifications

Staple Gauge	16
Staple Capacity	157
Magazine Angle	Straight
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	4.7 lbs

Includes

Safety Glasses	875769
----------------	--------

Optional

Sequential Trip Mechanism	876762
---------------------------	--------




N3808AP

1-1/2" Cap Stapler



- Ideal for: roof felt, housewrap and foamboard installation
- 200 cap & staple capacity allows for fewer reloads & more productivity
- Quick-clear jam release increases user efficiency
- Depth of drive adjustment
- Lightweight & compact for easier maneuverability



Specifications

Staple Gauge	18
Staple & Cap Capacity	200 each
Magazine Angle	Straight
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	4.9 lbs

Includes

Safety Glasses	
Hex Bar Wrench	

1 Gallon Quiet Compressor

EC28M



Specifications

Power Output	0.5 Run HP
Tank Capacity	1 Gallon
Amps	2.8
Max Pressure	125 PSI
CFM	0.8 @ 90 PSI
Weight	25.6 lbs

- Ultra quiet operation at only 59 dB's
- Quiet industrial oil-free pump provides high durability with no maintenance
- Motor Overload Protection stops the motor in a possible overload situation
- Stainless steel braided discharge hose resist corrosion and remains flexible
- Compact and lightweight for easy transport



NEW!



6 Gallon Pancake Air Compressor + Finish Nailer Combo Kit

KNT50AB (EC710S)



Specifications (EC710 Compressor)

Power Output	1.0 Run HP
Tank Capacity	6 Gallon
Amps	12
Max Pressure	150 PSI
CFM	2.8 @ 90 PSI
Weight	36.5 lbs

Specifications (NT50AE2S)

See page 10

Includes

EC710 Pancake Compressor
NT50AE2 2" 18Ga Finish Nailer
25' Premium Hybrid Hose
Safety Glasses

- Motor Thermal Overload Protection stops the motor in a possible overheating situation
- Industrial oil-free pump provides high durability with no-maintenance
- Industrial air pressure gauges, encased in steel, for higher durability
- Two universal quick couplers for fast tool changes
- 2.8 CFM @ 90 PSI, 150 Max PSI



NT50AE2(S)

Portable 4 Gallon Twin Stack Air Compressor

EC99S



Specifications

Power Output	2.0 Run HP
Tank Capacity	4 Gallon
Amps	15
Max Pressure	135 PSI
CFM	3.1 @ 90 PSI
Weight	52.9 lbs

- Motor Thermal Overload Protection stops the motor in a possible overheating situation
- Cast iron, oil lubricated pump for cooler operation and greater longevity
- 15 Amp direct drive induction motor for efficient and reliable performance
- Locking regulator ensures the proper pressure is delivered to your tool
- Industrial air pressure gauges, encased in steel for higher durability
- 105 On/135 Off pressure switch for less cycling
- Universal quick coupler for fast tool changes



Includes

Synthetic Oil (SAE15W40 8oz.)	115337
Oil Dipstick	881469

8 Gallon Gas Powered Wheeled Air Compressor

EC2510E



Specifications

Power Output	5.5 Net HP* @ 3,600 RPM
Tank Capacity	8 Gallon
Pump RPM	1,700
Motor RPM	3,640 RPM
Max Pressure	145 PSI
CFM	9.3 @ 90 PSI
Weight	143.3 lbs

- Powered by a professional grade Honda GX engine
- Solid cast iron cylinder provides industry recognized premium material for long life, consistent compression and low oil carryover
- Oversized oil level site glass allows everyone to monitor the oil level for the pump avoiding pump damage due to lock up from inadequate oil supply

* The power rating of the engine indicated in this document is the net power output tested on a production engine for the engine model and measured in accordance with SAE J1349 at a specified rpm. Mass production engines may vary from this value. Actual power output for the engine installed in the final machine will vary depending on numerous factors, including the operating speed of the engine in application, environmental conditions, maintenance, and other variables.





EC2610E

8 Gallon Gas Powered Wheeled Air Compressor

NEW!



- Powered by a professional grade Honda GX engine
- Solid cast iron cylinder provides industry recognized premium material for long life, consistent compression and low oil carryover
- Oversized oil level site glass allows everyone to monitor the oil level for the pump avoiding pump damage due to lock up from inadequate oil supply

* The power rating of the engine indicated in this document is the net power output tested on a production engine for the engine model and measured in accordance with SAE J1349 at a specified rpm. Mass production engines may vary from this value. Actual power output for the engine installed in the final machine will vary depending on numerous factors, including the operating speed of the engine in application, environmental conditions, maintenance, and other variables.

Specifications

Power Output	5.5 Net HP* @ 3,600 RPM
Tank Capacity	8 Gallon
Pump RPM	1,000
Motor RPM	3,600 RPM
Max Pressure	145 PSI
CFM	9.5 @ 90 PSI
Weight	158.7 lbs

Includes

Breather Pipe Plug
Wheel



UA3810AB

10 Gallon ASME Certified Reserve Air Tank



- 4 unregulated outputs
- 1 regulated output
- Industrial ball valve on input
- Industrial gauges
- Industrial large knob regulator

Specifications

Tank Type	Keg
Tank Capacity	10 Gallon
Max Pressure	175 PSI
No. of Outputs	5
No. of Inputs	1
Dimensions (L x W x H)	23" x 13" x 20"
Weight	39.5 lbs

Includes

(4) 1/4" Universal Couplers



NR1890DR


3-1/2" 18V Lithium Ion Plastic Strip Framing Nailer

NEW!



- Brushless Motor for longer run time per charge, less maintenance and increased durability
- 400 Nails Per Charge using Hitachi's new compact 3.0Ah Li-Ion battery
- Air Spring Drive System delivers similar performance as a pneumatic tool
- Tool-less Depth of Drive
- Dry-fire lockout
- Selective actuation: Bump and sequential modes
- Battery charge indicator

Plastic Strip Collation, 21°



Specifications

Volts	18
Nail Capacity	37
Magazine Angle	21°
Nails Per Charge	400
Battery Type	Lithium Ion Slide
Weight (with BSL1830C battery)	10.8 lbs

Includes

(1) 18V Compact 3.0Ah Battery 339782
BSL1830C
Rapid Charger UC18YFSL
Safety Glasses 875769
Contractor Bag 372294



NR1890DC


3-1/2" 18V Lithium Ion Paper Strip Framing Nailer

NEW!



- Brushless Motor for longer run time per charge, less maintenance and increased durability
- 400 Nails Per Charge using Hitachi's new compact 3.0Ah Li-Ion battery
- Air Spring Drive System delivers similar performance as a pneumatic tool
- Selective actuation: Bump and sequential modes
- Battery charge indicator

Paper Strip Collation, Clipped & Offset Round Head, 30°



Specifications

Volts	18
Nail Capacity	47
Magazine Angle	30° +/-
Nails Per Charge	400
Battery Type	Lithium Ion Slide
Weight	10.6 lbs

Includes

(1) 18V Compact 3.0Ah Battery 339782
BSL1830C
Rapid Charger UC18YFSL
Safety Glasses 875769
Contractor Bag 372294

CLIPPED & OFFSET ROUND HEAD

2-1/2" 18V Lithium Ion 15-Gauge Angled Finish Nailer


NT1865DMA

Specifications

Volts	18
Nail Capacity	100
Magazine Angle	34°
Nails Per Charge	1,100 Nails
Battery Type	Lithium Ion Slide
Weight (with BSL1830C battery)	7.5 lbs

Includes

(1) 18V Compact 3.0Ah Battery BSL1830C	339782
Rapid Charger	UC18YFSL
No Mar Nose Cap	881751
Safety Glasses	875769
Contractor Bag	371108



- Powered by Hitachi's new Compact 3.0Ah Lithium Ion slide-type battery for less weight than traditional 3.0Ah batteries
- Selective actuation switch lets the user easily select bump fire or sequential fire modes
- Tool-less depth of drive
- Integrated belt hook so the tool is always close at hand
- Built-in LED light
- Dry-fire Lockout



2-1/2" 18V Lithium Ion 16-Gauge Straight Finish Nailer


NT1865DM

Specifications

Volts	18
Nail Capacity	100
Magazine Angle	Straight
Nails Per Charge	1,500 Nails
Battery Type	Lithium Ion Slide
Weight (with BSL1830C battery)	7.3 lbs

Includes

(1) 18V Compact 3.0Ah Battery BSL1830C	339782
Rapid Charger	UC18YFSL
No Mar Nose Cap	881751
Safety Glasses	875769
Contractor Bag	371108



- Powered by Hitachi's new Compact 3.0Ah Lithium Ion slide-type battery for less weight than traditional 3.0Ah batteries
- Selective actuation switch lets the user easily select bump fire or sequential fire modes
- Tool-less depth of drive Integrated belt hook so the tool is always close at hand
- Built-in LED light
- Dry-fire Lockout



2" 18V Lithium Ion 18-Gauge Brad Nailer


NT1850DE

Specifications

Volts	18
Nail Capacity	100
Magazine Angle	Straight
Nails Per Charge	1,650
Battery Type	Lithium Ion Slide
Weight (with BSL1830C battery)	7.3 lbs

Includes

(1) 18V Compact 3.0Ah Battery BSL1830C	339782
Rapid Charger	UC18YFSL
No Mar Nose Cap	885887
Safety Glasses	875769
Contractor Bag	371108



- Powered by Hitachi's new Compact 3.0Ah Lithium Ion slide-type battery for less weight than traditional 3.0Ah batteries, while also providing fade free power and over-charge, over-discharge and over-load protection
- Selective actuation switch lets the user easily select bump fire or sequential fire modes
- Tool-less depth of drive adjustment for flush drives into various materials
- Integrated belt hook so the tool is always close at hand
- Built-in LED light maximizes efficiency in low-light areas



1-3/8" 18V Lithium Ion 23-Gauge Pin Nailer


NP18DSAL

Specifications

Volts	18
Nail Capacity	100
Magazine Angle	Straight
Nails Per Charge	3,050
Battery Type	Lithium Ion Slide
Weight (with BSL1830C battery)	4.4 lbs

Includes

(1) 18V Compact 3.0Ah Battery BSL1830C	339782
Rapid Charger	UC18YFSL
No Mar Nose Cap	885887
Safety Glasses	875769
Contractor Bag	371108



- Powered by Hitachi's new Compact 3.0Ah Lithium Ion slide-type battery for less weight than traditional 3.0Ah batteries, while also providing fade free power and over-charge, over-discharge and over-load protection
- Tool-less depth of drive adjustment for flush drives into various materials
- Dry-fire lock out prevents nail activation when pin count is low
- No push tip reduces marring & provides a clean finish



Also available
NP18DSALP4
(bare tool only)




NR90GC2

3-1/2" Gas Powered Paper Collated Framing Nailer



- Operates on fuel rod and cordless battery offering complete portability through elimination of air hose and compressor
- Drives up to 2 nails per second and 1000 nails per hour
- Adjustable depth of drive nose piece assures proper nail down with varying materials

Paper Strip Collation,
Clipped Head, 30°
.120 - .131



Specifications

Nail Capacity	37
Magazine Angle	35°
Battery	7.2V NiCd
Battery Life	4,000 Nails
Fuel Cell Life	1,200 Nails
Weight (with battery and fuel cell)	7.7 lbs

Includes

NiCd Battery EB714S	325292
1 Hour Charger	UC18YGL2
Safety Glasses	875769
Hex Bar Wrench (4mm)	944458
Case	886146

Optional

Tall Fuel Cell	728982
Degreaser/Cleaner	728985B8
Gas Nailer Lubricant	728986B12




NR90GR2

3-1/2" Gas Powered Plastic Strip Collated Framing Nailer



- Operates on fuel rod and cordless battery offering complete portability through elimination of air hose and compressor
- Drives up to 2 nails per second and 1,000 nails per hour
- Adjustable depth of drive nose piece assures proper nail down with varying materials

Plastic Strip Collation, 21°
.113 - .131



Specifications

Nail Capacity	32-35
Magazine Angle	21°
Battery	7.2V NiCd
Battery Life	4,000 Nails
Fuel Cell Life	1,200 Nails
Weight (with battery and fuel cell)	7.9 lbs

Includes

NiCd Battery EB714S	325292
1 Hour Charger	UC18YGL2
Safety Glasses	875769
Hex Bar Wrench (4mm)	944458
Case	886146

Optional

Tall Fuel Cell	728982
Degreaser/Cleaner	728985B8
Gas Nailer Lubricant	728986B12




NC40G

1-9/16" Gas Powered Concrete Nailer



- Operates on fuel rod and cordless battery offering complete portability through elimination of air hose and compressor
- Dry-fire lock out prevents blank drives
- Two-step nail feeder for quick and easy loading

Plastic Strip Collation
.102



Specifications

Nail Capacity	40
Magazine Angle	Straight
Battery	7.2V NiCd
Battery Life	3,000 Nails
Fuel Cell Life	1,200 Nails
Weight (with battery and fuel cell)	8.2 lbs

Includes

NiCd Battery EB714S	325292
1 Hour Charger	UC18YGL2
Safety Glasses	875769
Hex Bar Wrench (4mm)	944458
Case	886485

Optional

Tall Fuel Cell	728982
Degreaser/Cleaner	728985B8
Gas Nailer Lubricant	728986B12



NT65GAP9

2-1/2" Gas Powered 15-Gauge Angled Finish Nailer



- Operates on fuel rod and cordless battery offering complete portability through elimination of air hose and compressor
- Double action nail feed and reciprocating piston system drive up to 1 nail per second or 900 per hour
- Quick clear nose with tool-less jam release for easy maintenance and reduced downtime

15-Gauge, 34°



Specifications

Nail Capacity	100
Magazine Angle	34°
Battery	3.6V Li-Ion
Battery Life	2,000 Nails
Fuel Cell Life	1,200 Nails
Weight (with battery and fuel cell)	4.4 lbs

Includes

(2) 3.6V Li-Ion Batteries	326263
AC/DC Charger	UC35ML
No Mar Nose Cap	886349
Hex Bar Wrenches (4mm / 3mm)	944458 / 943277
Safety Glasses / Case	875769 / 886617

Optional

Short Fuel Cell	728981
Degreaser/Cleaner	728985B8
Gas Nailer Lubricant	728986B12

Fastener Coating Key:

- Basic Bright
- Hot Dipped Galvanized
- Heat Treated / Hardened
- Stainless Steel
- Electro Galvanized

Fastener Description Key:

- AL** = Aluminum
- BS** = Basic Bright
- EG** = Electro Galvanized
- HDG** = Hot Dipped Galvanized
- HT** = Heat Treated or Hardened
- SS** = Stainless Steel
- SM** = Smooth Shank
- RG** = Ring Shank
- SC** = Screw Shank
- FC** = Fiber Cement Nail
- BL** = Blunt Point
- DP** = Diamond Point

21° (+/- 1°) FULL ROUND HEAD PLASTIC STRIP NAILS

Item Code	Description	Boxes Per Ctn	M's Per Box	M's Per Ctn	Ctns/Skid
○ 10000	1-1/2" x .148 SM BS	-	-	5	48
○ 10100	2" x .113 SM BS	-	-	6	48
○ 10122	2" x .113 RG BS	-	-	6	48
○ 10134	2-1/8" x .148 SM BS	-	-	4	48
○ 10135	2-1/4" x .148 SM BS	-	-	4	48
○ 10102	2-3/8" x .113 SM BS	-	-	5	48
○ 10102M	2-3/8" x .113 SM BS	-	-	2	96
○ 10103	2-3/8" x .113 RG BS	-	-	5	48
○ 10103M	2-3/8" x .113 RG BS	-	-	2	96
○ 10203	2-3/8" x .113 SC BS	-	-	5	48
○ 20103S	2-3/8" x .113 RG BS	4	1	4	60
○ 10143	2-3/8" x .148 SM BS	-	-	4	48
○ 10143M	2-3/8" x .148 SM BS	-	-	2	96
○ 10144	2-3/8" x .148 RG BS	-	-	4	48
○ 10244	2-3/8" x .148 SC BS	-	-	4	48
○ 20143S	2-3/8" x .148 SM BS	4	1	4	48
○ 10131	2-1/2" x .131 RG BS	-	-	5	48
○ 10132	2-1/2" x .131 SM BS	-	-	5	48
○ 10132M	2-1/2" x .131 SM BS	-	-	2	96
○ 20132S	2-1/2" x .131 SM BS	4	1	4	60
○ 10127	2-3/4" x .120 SC BS	-	-	4	48
○ 10105	3" x .120 SM BS	-	-	4	48
○ 10105M	3" x .120 SM BS	-	-	2	96
○ 10124	3" x .120 SC BS	-	-	4	48
○ 10133	3" x .120 RG BS	-	-	4	48
○ 20105S	3" x .120 SM BS	4	1	4	48
○ 10110	3" x .131 SM BS	-	-	4	48
○ 10110M	3" x .131 SM BS	-	-	2	96
○ 10186	3" x .131 RG BS	-	-	4	48
○ 20110S	3" x .131 SM BS	4	1	4	48
○ 10136	3" x .148 SM BS	-	-	4	48
○ 10107	3-1/4" x .120 SM BS	-	-	4	48
○ 10109	3-1/4" x .131 SC BS	-	-	4	48
○ 10111	3-1/4" x .131 SM BS	-	-	4	48
○ 10111M	3-1/4" x .131 SM BS	-	-	2	96
○ 20111S	3-1/4" x .131 SM BS	4	1	4	48
○ 10138	3-1/4" x .148 SM BS	-	-	3	48
○ 10138M	3-1/4" x .148 SM BS	-	-	2	96
○ 20138S	3-1/4" x .148 SM BS	4	1	4	48
○ 10120	3-1/2" x .131 SM BS	-	-	4	48
○ 10140	3-1/2" x .162 SM BS	-	-	3	48
● 10198	2-1/4" x .120 SC HT	-	-	5	48
● 10199	2-1/4" x .120 SM HT	-	-	5	48
● 10123	2" x .113 RG EG	-	-	6	48
● 10104	2-3/8" x .113 SM EG	-	-	5	48
● 10112	2-3/8" x .113 RG EG	-	-	5	48
● 10155	2-1/2" x .131 SM EG	-	-	5	48
● 10106	3" x .120 SC EG	-	-	4	48
● 10113	3" x .120 SM EG	-	-	4	48
● 10117	3" x .120 RG EG	-	-	4	48
● 10115	3" x .131 SM EG	-	-	4	48
● 10119	3-1/4" x .120 SC DP EG	-	-	4	48
● 10116	3-1/4" x .131 SM EG	-	-	4	48

21° (+/- 1°) FULL ROUND HEAD PLASTIC STRIP NAILS

Item Code	Description	Boxes Per Ctn	M's Per Box	M's Per Ctn	Ctns/Skid
● 10171M	2" x .113 RG HDG	-	-	2	96
● 20171S	2" x .113 RG HDG	4	1	4	60
● 10301	2-1/4" x .148 SM HDG	-	-	4	48
● 10159	2-3/8" x .113 SC DP HDG	-	-	5	48
● 10160	2-3/8" x .113 SM HDG	-	-	5	48
● 10161	2-3/8" x .113 RG HDG	-	-	5	48
● 10161M	2-3/8" x .113 RG HDG	-	-	2	96
● 20161S	2-3/8" x .113 RG HDG	4	1	4	60
● 10307	2-3/8" x .148 SM HDG	-	-	4	48
● 10168	2-1/2" x .131 SM HDG	-	-	4	48
● 10311	2-1/2" x .131 RG HDG	-	-	4	48
● 10165	3" x .120 SC DP HDG	-	-	4	48
● 10165M	3" x .120 SC DP HDG	-	-	2	96
● 10300	3" x .120 SM HDG	-	-	4	48
● 10302	3" x .120 RG HDG	-	-	4	48
● 10302M	3" x .120 RG HDG	-	-	2	96
● 20302S	3" x .120 RG HDG	4	1	4	48
● 10162	3" x .131 SM HDG	-	-	4	48
● 10162M	3" x .131 SM HDG	-	-	2	96
● 10167	3" x .148 SM HDG	-	-	4	48
● 10166	3-1/4" x .120 SC DP HDG	-	-	4	48
● 10166M	3-1/4" x .120 SC DP HDG	-	-	2	96
● 10309	3-1/4" x .120 RG HDG	-	-	4	48
● 10309M	3-1/4" x .120 RG HDG	-	-	2	96
● 10163	3-1/4" x .131 SM HDG	-	-	4	48
● 10163M	3-1/4" x .131 SM HDG	-	-	2	96
● 10306	3-1/4" x .131 SC HDG	-	-	4	48
● 20163S	3-1/4" x .131 SM HDG	4	1	4	48
● 10164	3-1/2" x .131 SM HDG	-	-	4	48
● 10303	3-1/2" x .162 SM HDG	-	-	3	48

21° (+/- 1°) PLASTIC STRIP BALLISTIC FASTENERS

Item Code	Description	Boxes Per Ctn	M's Per Box	M's Per Ctn	Ctns/Skid
● 17640	8 x 1-3/4" Threaded SC EG	4	1	4	48
● 17641	8 x 2" Threaded SC EG	4	1	4	48
● 17644	8 x 2-1/4" Threaded SC EG	4	1	4	48
● 17642	8 x 2-1/2" Threaded SC EG	4	1	4	48
● 17643	8 x 2-3/4" Threaded SC EG	4	1	4	48
● 17645	8 x 3" Threaded SC EG	4	1	4	48



NR83A5
3-1/4" Plastic Strip Framing Nail

ALSO FITS:

- Hitachi NR83A2
- Hitachi NR83A3
- Hitachi NR83A3(S)
- Hitachi NR90AE(S1)
- Hitachi NR1890DR

Fits most round head plastic strip collated framing nailers

Fastener Coating Key:

- Basic Bright
- Heat Treated / Hardened
- Electro Galvanized
- Hot Dipped Galvanized
- Stainless Steel

Fastener Description Key:

- AL = Aluminum
- BS = Basic Bright
- EG = Electro Galvanized
- HDG = Hot Dipped Galvanized
- HT = Heat Treated or Hardened
- SS = Stainless Steel
- SM = Smooth Shank
- RG = Ring Shank
- SC = Screw Shank
- FC = Fiber Cement Nail
- BL = Blunt Point
- DP = Diamond Point

35° (+/- 2°) CLIPPED HEAD PAPER TAPE NAILS

Item Code	Description	Boxes Per Ctn	M's Per Box	M's Per Ctn	Ctns/Skid
○ 15111M	2" x .113 SM BS	-	-	2	120
○ 15112M	2" x .113 RG BS	-	-	2	120
○ 15116	2" x .120 RG BS	-	-	4.8	80
○ 15102M	2-3/8" x .113 SM BS	-	-	2	120
○ 15103M	2-3/8" x .113 RG BS	-	-	2	120
○ 15100	2-3/8" x .120 SM BS	-	-	4.8	80
○ 15101	2-3/8" x .120 RG BS	-	-	4.8	80
○ 15104	2-3/4" x .120 RG BS	-	-	4.8	80
○ 15105	3" x .120 SM BS	-	-	2.5	84
○ 15125	3" x .120 RG BS	-	-	2.5	84
○ 15108	3" x .131 RG BS	-	-	2.5	84
○ 15109	3" x .131 SM BS	-	-	2.5	84
○ 15107	3-1/4" x .120 SM BS	-	-	2.5	84
○ 15110	3-1/4" x .131 SM BS	-	-	2.5	84
○ 15126	3-1/2" x .131 SM BS	-	-	2.5	84
● 15130M	2" x .113 RG HDG	-	-	2	120
● 15131M	2" x .113 SM HDG	-	-	2	120
● 15132	2-3/8" x .120 SM HDG	-	-	4.8	80
● 15133	2-3/8" x .120 RG HDG	-	-	4.8	80
● 25133S	2-3/8" x .120 RG HDG	4	1	4	60
● 15136	3" x .120 SM HDG	-	-	2.5	84
● 15137	3" x .120 RG HDG	-	-	2.5	84
● 25137S	3" x .120 RG HDG	4	1	4	60
● 15138	3" x .131 SM HDG	-	-	2.5	84
● 15139	3" x .131 RG HDG	-	-	2.5	84
● 15140	3-1/4" x .120 SM HDG	-	-	2.5	84
● 15141	3-1/4" x .120 RG HDG	-	-	2.5	84
● 15142	3-1/4" x .131 SM HDG	-	-	2.5	84
● 15143	3-1/4" x .131 RG HDG	-	-	2.5	84
● 15144	3-1/2" x .131 SM HDG	-	-	2.5	84
● 15145	3-1/2" x .131 RG HDG	-	-	2.5	84

36° (+/- 1°) PAPER TAPE STRAP TITE NAILS

Item Code	Description	Boxes Per Ctn	M's Per Box	M's Per Ctn	Ctns/Skid
● 17121	1-1/2" x .131 SM HT BS	-	-	4	96
● 17124	1-1/2" x .148 SM HT BS	-	-	3	96
● 17126	2-1/2" x .131 SM HT BS	-	-	2.5	96
● 17127	2-1/2" x .148 SM HT BS	-	-	2.5	96
● 17130	2-1/2" x .162 SM HT BS	-	-	2	96
● 17100	1-1/2" x .131 SM HT EG	-	-	4	96
● 17104	1-1/2" x .148 SM HT EG	-	-	3	96
● 17131	1-1/2" x .131 SM HT HDG	-	-	4	96
● 17134	1-1/2" x .148 SM HT HDG	-	-	3	96
● 17136	2-1/2" x .131 SM HT HDG	-	-	2.5	96
● 17137	2-1/2" x .148 SM HT HDG	-	-	2.5	96
● 17140	2-1/2" x .162 SM HT HDG	-	-	2	96



NR65AK2
2-1/2" Strap-Tite System Strip Nailer

ALSO FITS:
Hitachi NR65AK2(S)
Hitachi NR38AK



35° (+/- 2°) OFFSET ROUND HEAD PAPER TAPE NAILS


Item Code	Description	Boxes Per Ctn	M's Per Box	M's Per Ctn	Ctns/Skid
○ 15202M	2-3/8" x .113 SM BS	-	-	2	96
○ 15203M	2-3/8" x .113 RG BS	-	-	2	96
○ 15200	2-3/8" x .120 SM BS	-	-	4.8	80
○ 15201	2-3/8" x .120 RG BS	-	-	4.8	80
○ 15205	3" x .120 SM BS	-	-	2.5	84
○ 15209	3" x .131 SM BS	-	-	2.5	84
○ 15210	3-1/4" x .131 SM BS	-	-	2.5	84
● 15230M	2" x .113 RG HDG	-	-	2	96
● 15231M	2-3/8" x .113 RG HDG	-	-	2	96
● 15233	2-3/8" x .120 RG HDG	-	-	4.8	80
● 15237	3" x .120 RG HDG	-	-	2.5	84
● 15238	3" x .131 SM HDG	-	-	2.5	84
● 15242	3-1/4" x .131 SM HDG	-	-	2.5	84



NR83AA5
3-1/4" Paper Collated Framing Nailer

ALSO FITS:
Hitachi NR83AA4
Hitachi NR90AD(S1)
Hitachi NR1890DC

Fits most
clipped head
paper collated
framing nailers

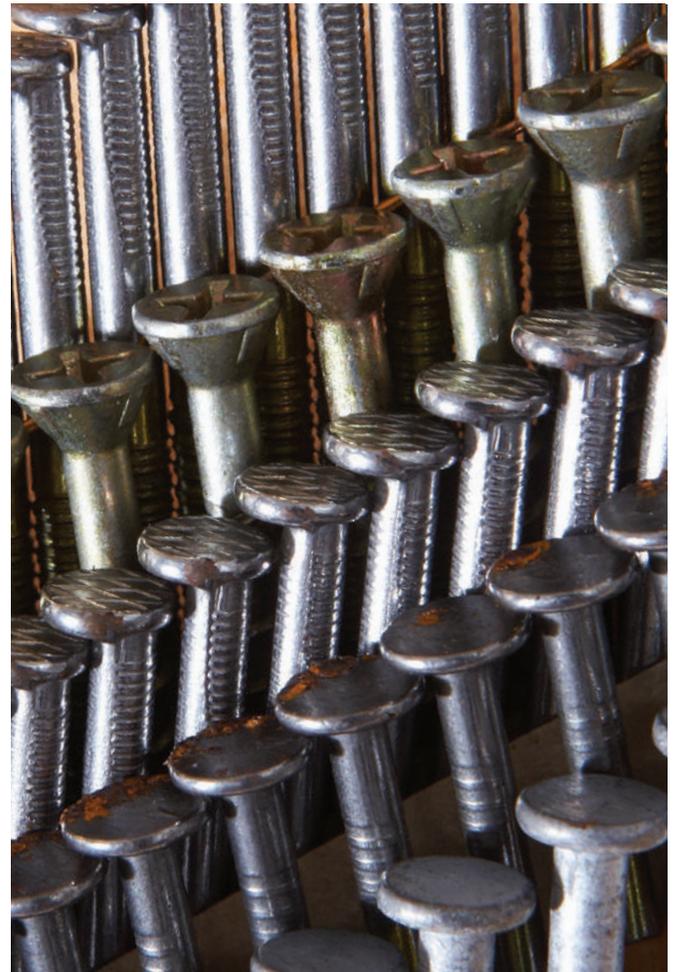

Fastener Coating Key:

- Basic Bright
- Hot Dipped Galvanized
- Heat Treated / Hardened
- Stainless Steel
- Electro Galvanized

Fastener Description Key:

- AL = Aluminum
- BS = Basic Bright
- EG = Electro Galvanized
- HDG = Hot Dipped Galvanized
- HT = Heat Treated or Hardened
- SS = Stainless Steel
- SM = Smooth Shank
- RG = Ring Shank
- SC = Screw Shank
- FC = Fiber Cement Nail
- BL = Blunt Point
- DP = Diamond Point

16° (+/- 1°) ROUND HEAD WIRE COIL ROOFING NAILS

Item Code	Description	Boxes Per Ctn	M's Per Box	M's Per Ctn	Ctns/Skid
● 12108	7/8" x .120 SM EG	-	-	7.2	56
● 12100	1" x .120 SM EG	-	-	7.2	56
● 12101	1-1/4" x .120 SM EG	-	-	7.2	48
● 12111	1-1/4" x .120 SM EG, High Wire	-	-	7.2	48
● 12102	1-1/2" x .120 SM EG	-	-	7.2	40
● 12103	1-3/4" x .120 SM EG	-	-	7.2	40



NV45AB2
1-3/4" Coil Roofing Nail

Fits most full round head wire coil roofing nailers

16° (+/- 1°) ROUND HEAD MINI WIRE COIL NAILS

● 12301	1-1/4" x .083 RG BS	-	-	16	40
● 12305	1-1/2" x .083 SM BS	-	-	16	40
● 12306	1-1/2" x .083 RG BS	-	-	16	40
● 12311	1-3/4" x .083 RG BS	-	-	16	40
● 12315	2" x .083 SM BS	-	-	12	40
● 12316	2" x .083 RG BS	-	-	12	40
● 12302	1-1/4" x .083 RG EG	-	-	16	40
● 12307	1-1/2" x .083 RG EG	-	-	16	40
● 12312	1-3/4" x .083 RG EG	-	-	16	40
● 12317	2" x .083 RG EG	-	-	12	40
● 12322	1-1/2" x .083 RG 304 SS	4	1.4	5.6	36
● 12321	2" x .083 RG 304 SS	4	1.4	5.6	36



NV50A1
2" Coil Utility Nail

Fits most round head mini wire coil nailers

16° (+/- 1°) PLASTIC-CAP ROUND HEAD WIRE COIL NAILS

● 12359	7/8" x .083 RG EG	-	-	2.8	75
● 12343	1-1/4" x .083 RG EG	-	-	2.8	75
● 12358	2" x .083 RG EG	-	-	2.8	75

16° (+/- 1°) METAL-CAP ROUND HEAD WIRE COIL NAILS

● 12346	7/8" x .083 RG EG	-	-	2.8	75
● 12344	1-1/4" x .083 RG EG	-	-	2.8	75
● 12345	2" x .083 RG EG	-	-	2.8	75

FITS:

Hitachi NV50AP2
Hitachi NV50AP3

18 GA 7/16" PLASTIC-CAP STAPLES

● 31102S	7/16" x 7/8" x 18GA	-	-	2	24
● 31105S	7/16" x 1-1/4" x 18GA	-	-	2	24
● 31107S	7/16" x 1-1/2" x 18GA	-	-	2	24



N3808AP
1-1/2" Cap Stapler

Fits most cap staplers

15° (+/- 1°) ROUND HEAD PLASTIC SHEET COIL NAILS

Item Code	Description	Boxes Per Ctn	M's Per Box	M's Per Ctn	Ctns/Skid
● 13310	1-7/8" x .092 RG AL	-	-	6	30
● 13304	1-3/4" x .086 RG EG	-	-	6	30
● 13306	1-7/8" x .099 SM EG	-	-	6	30
● 13313	2" x .092 RG EG	-	-	6	30
● 13321	2-1/4" x .092 SM EG	-	-	4.8	30
● 13320	2-1/4" x .092 RG EG	-	-	4.8	30
● 13305	1-3/4" x .092 RG HDG	-	-	6	30
● 13375	2" x .092 SM HDG FC	-	-	6	30
● 13376	2" x .092 RG HDG FC	-	-	6	30
● 13385	2-1/4" x .092 RG HDG FC	-	-	4.8	30
● 13388	2-1/4" x .092 SM HDG FC	-	-	4.8	30
● 13389	2-1/2" x .092 SM HDG FC	-	-	4.8	30
● 13390	2-1/2" x .092 RG HDG FC	-	-	4.8	30
● 13391	3" x .113 SM HDG FC	-	-	4.8	30
● 13392	3" x .113 SM HDG FC	-	-	3.6	30
● 13386	2-1/4" x .092 SM 304 SS FC	2	2.4	4.8	30
● 13387	2-1/4" x .092 RG 304 SS FC	2	2.4	4.8	30

16° (+/- 1°) ROUND HEAD WIRE COIL SIDING NAILS

● 13334	1-3/4" x .092 RG EG	-	-	3.6	60
● 13333	2" x .092 SM EG	-	-	3.6	60
● 13335	2" x .092 RG EG	-	-	3.6	60
● 13338	2-1/4" x .092 RG EG	-	-	3.6	60
● 13339	2-1/4" x .092 SM EG	-	-	3.6	60
● 13340	2-1/2" x .092 RG EG	-	-	3.6	60
● 13361	1-1/4" x .092 RG HDG	-	-	3.6	60
● 13362	1-1/2" x .092 RG HDG	-	-	3.6	60
● 13363	1-3/4" x .092 RG HDG	-	-	3.6	60
● 13364	2" x .092 SM HDG	-	-	3.6	60
● 13365H	2" x .092 RG HDG	-	-	3.6	60
● 13366	2-1/4" x .092 SM HDG	-	-	3.6	60
● 13367	2-1/4" x .092 RG HDG	-	-	3.6	60
● 13369	2-1/2" x .092 RG HDG	-	-	3.6	60
● 13348	1-1/4" x .090 RG 304 SS	4	0.9	3.6	48
● 13349	1-1/2" x .090 RG 304 SS	4	0.9	3.6	48
● 13350	1-3/4" x .090 RG 304 SS	4	0.9	3.6	48
● 13355	2" x .090 RG 304 SS	4	0.9	3.6	48
● 13352	2-1/4" x .090 RG 304 SS	4	0.9	3.6	48
● 13356	2-1/2" x .090 RG 304 SS	4	0.9	3.6	48



NV65AH2
2-1/2" Coil Siding Nail

ALSO FITS:

Hitachi NV65AH
Hitachi NV75AG

Fits most round head coil siding nailers

Fastener Coating Key:

- Basic Bright
- Heat Treated / Hardened
- Electro Galvanized
- Hot Dipped Galvanized
- Stainless Steel

Fastener Description Key:

- BS = Basic Bright
- EG = Electro Galvanized
- HDG = Hot Dipped Galvanized
- HT = Heat Treated or Hardened
- SS = Stainless Steel
- SM = Smooth Shank
- RG = Ring Shank
- SC = Screw Shank
- BL = Blunt Point
- DP = Diamond Point

16° (+/- 1°) ROUND HEAD WIRE COIL NAILS

Item Code	Description	Boxes Per Ctn	M's Per Box	M's Per Ctn	Ctns/Skid
○ 12200	2" x .099 SM BS	-	-	9	40
○ 12201	2" x .099 RG BS	-	-	9	40
○ 12209	2" x .099 SC BL DP BS	-	-	9	40
○ 12205	2" x .099 SC BL CHS BS	-	-	9	40
○ 12203	2" x .113 SM BS	-	-	5	56
○ 12226	2" x .113 RG BS	-	-	5	56
○ 12206	2-1/4" x .099 SC BL CHS BS	-	-	9	40
○ 12210	2-1/4" x .099 SC BL DP BS	-	-	9	40
○ 12210D	2-1/4" x .099 SC DP BS	-	-	9	40
○ 12210H	2-1/4" x .099 SC BL DP BS	-	-	9	40
○ 12219	2-3/8" x .099 RG BS	-	-	9	40
○ 12221	2-3/8" x .113 SM BS	-	-	5	48
○ 12211	2-3/8" x .113 RG BS	-	-	5	48
○ 12211H	2-3/8" x .113 RG BS	-	-	2.7	72
○ 12218	2-1/2" x .099 SC BL CHS BS	-	-	9	40
○ 12236	2-1/2" x .131 SM BS	-	-	4.5	48
○ 12236H	2-1/2" x .131 SM BS	-	-	2.4	72
○ 12213	3" x .120 SM BS	-	-	4	45
○ 12213H	3" x .120 SM BS	-	-	2.4	60
○ 12231	3" x .120 SC BS	-	-	4	45
○ 12216	3" x .131 SM BS	-	-	4	45
○ 12216H	3" x .131 SM BS	-	-	2.4	60
○ 12246	3" x .131 RG BS	-	-	4	45
○ 12215	3-1/4" x .120 SM BS	-	-	4	45
○ 12214	3-1/4" x .120 SC BS	-	-	4	45
○ 12217	3-1/4" x .131 SM BS	-	-	4	45
○ 12217H	3-1/4" x .131 SM BS	-	-	2.4	60
● 12400	1-1/2" x .099 SM BS HT	-	-	4.5	48
● 12400H	1-1/2" x .099 SM BS HT	-	-	3	96
● 12410	1-1/2" x .113 SM BS HT	-	-	4.5	48
● 12406	2-1/4" x .099 SM BS HT	-	-	4.5	48
● 12406H	2-1/4" x .099 SM BS HT	-	-	3	72
● 12416	2-1/4" x .113 SM BS HT	-	-	4.5	48
● 12202	2" x .099 RG EG	-	-	9	40
● 12227	2" x .113 RG EG	-	-	5	56
● 12207	2-3/8" x .099 RG EG	-	-	9	40
● 12228	2-3/8" x .113 RG EG	-	-	5	48
● 12249	2-1/2" x .099 SM EG	-	-	9	40
● 12233	2-1/2" x .131 RG EG	-	-	4.5	48
● 12232	3" x .120 SC EG	-	-	4	45
● 12235	3" x .120 RG EG	-	-	4	45
● 12229	3" x .131 SM EG	-	-	4	45
● 12222	3-1/4" x .120 SC EG	-	-	4	45
● 12230	3-1/4" x .131 SM EG	-	-	4	45
● 12239	3-1/4" x .131 RG EG	-	-	4	45
● 12700	2" x .099 RG HDG	-	-	5	48
● 12703	2" x .113 RG HDG	-	-	4	56
● 12703H	2" x .113 RG HDG	-	-	2.7	96
● 12701	2-3/8" x .099 RG HDG	-	-	5	48
● 12705	2-3/8" x .113 RG HDG	-	-	4	48
● 12705H	2-3/8" x .113 RG HDG	-	-	2.7	72
● 12711	2-1/2" x .131 SM HDG	-	-	4	48
● 12712	2-1/2" x .131 RG HDG	-	-	4	48
● 12707	3" x .120 RG HDG	-	-	4	45
● 12707H	3" x .120 RG HDG	-	-	2.4	60
● 12708	3" x .120 SC HDG	-	-	4	45
● 12713	3" x .131 SM HDG	-	-	4	45

Screw Coating Key:

- Clear Zinc
- Phosphate
- Yellow Zinc
- GrabberGuard
- Stainless Steel

Screw Description Key:

- BH = Bugle Head
- SVH = Scavenger Head
- FH = Flat Head
- TH = Trim Head
- SP = Sharp Type Point
- DW = Drywall
- SD = Self Drilling
- FT = Fine Thread
- CT = Coarse Thread
- CZ = Clear Zinc
- PHOS = Phosphate
- YZ = Yellow Zinc
- STL = Steel
- SS = Stainless Steel
- GG = Grabber Guard

16° (+/- 1°) ROUND HEAD WIRE COIL NAILS (CONT.)

Item Code	Description	Boxes Per Ctn	M's Per Box	M's Per Ctn	Ctns/Skid
● 12709	3-1/4" x .120 SM HDG	-	-	4	45
● 12710	3-1/4" x .120 SC HDG	-	-	4	45
● 12714	3-1/4" x .131 SM HDG	-	-	4	45
● 12714H	3-1/4" x .131 SM HDG	-	-	2.4	60
● 12605S	2-3/8" x .113 RG 304 SS	2	1	2	60
● 12607	3" x .120 RG 304 SS	4	1	4	45



NV83A5
3-1/4" Plastic Strip Coiling Framing Nailer

ALSO FITS:
Hitachi NV83A4
Hitachi NV90AG
Hitachi NV90AG(S)

Fits most round head wire coil framing nailers

SUPER DRIVE PLASTIC COLLATED SCREWS

Item Code	Description	Recess	M's Per Box	M's Per Ctn
● 17251S	8 x 1-3/4" Wood to Wood SP CT YZ	#3 Lox	1	6
● 17252S	8 x 2" Wood to Wood SP CT YZ	#3 Lox	1	6
● 17314S	8 x 2" Wood to Wood or 16-25 GA Stl. SP FT YZ	#2 Lox	1	6
● 17316S	8 x 2-1/2" Wood to Wood or 16-25 GA Stl. SP FT YZ	#2 Lox	1	4
● 17802B	6 x 1-1/4" BH FT Drywall to Metal Collated, Phos	#2 Phil	1M	Bucket
● 17812B	6 x 1-1/4" BH CT Drywall to Wood Collated, Phos	#2 Phil	1M	Bucket
● 17813B	6 x 1-5/8" BH CT Drywall to Wood Collated, Phos	#2 Phil	1M	Bucket
● 17817B	8 x 1-3/4" FH CT Subfloor Collated, YZ	#2 Sq	1M	Bucket
● 17820B	8 x 2" FH CT Decking Collated, Exterior	#2 Sq	1M	Bucket
● 17825B	8 x 2-1/2" FH CT Decking Collated, Exterior	#2 Sq	.8M	Bucket
● 17830B	8 x 3" FH CT Decking Collated, Exterior	#2 Sq	.8M	Bucket



W6VB3SD2
SuperDrive Collated Screw System (2,600 RPM)

ALSO FITS:
W6V4SD2
SuperDrive Collated Screw System (4,500 RPM)

SuperDrive®

Fastener Coating Key:

- Basic Bright
- Hot Dipped Galvanized
- Heat Treated / Hardened
- Stainless Steel
- Electro Galvanized

Fastener Description Key:

- AL** = Aluminum
- BS** = Basic Bright
- EG** = Electro Galvanized
- HDG** = Hot Dipped Galvanized
- HT** = Heat Treated or Hardened
- SS** = Stainless Steel
- SM** = Smooth Shank
- RG** = Ring Shank
- SC** = Screw Shank
- FC** = Fiber Cement Nail
- BL** = Blunt Point
- DP** = Diamond Point

23 GA HEADLESS PINS

Item Code	Description	Blisters Per Ctn	M's Per Blister	M's Per Ctn	Ctns/Skid
● 22999S	1/2" x 23 GA EG	10	2	20	350
● 23000S	5/8" x 23 GA EG	10	2	20	350
● 23001S	3/4" x 23 GA EG	10	2	20	300
● 23002S	1" x 23 GA EG	10	2	20	300
● 23003S	1-3/16" x 23 GA EG	10	2	20	250
● 23004S	1-3/8" x 23 GA EG	10	2	20	250



NP35A
1-3/8" 23 GA Pin Nailer



NP18DSAL
1-3/8" 18V Lithium Ion
23 GA Pin Nailer

Fits most 23 gauge headless pin nailers

18 GA BRAD NAILS

● 14100S	5/8" x 18 GA EG	20	5	100	48
● 24100T	5/8" x 18 GA EG	10	1	10	400
● 14101M	3/4" x 18 GA EG	20	5	100	48
● 24101T	3/4" x 18 GA EG	10	1	10	400
● 14102S	1" x 18 GA EG	20	5	100	48
● 24102T	1" x 18 GA EG	10	1	10	400
● 14106S	1-1/4" x 18 GA EG	20	5	100	48
● 24106T	1-1/4" x 18 GA EG	10	1	10	280
● 14107S	1-1/2" x 18 GA EG	10	5	50	48
● 24107T	1-1/2" x 18 GA EG	10	1	10	280
● 14103S	1-5/8" x 18 GA EG	10	5	50	48
● 14105S	1-3/4" x 18 GA EG	10	5	50	48
● 24105T	1-3/4" x 18 GA EG	10	1	10	180
● 14108S	2" x 18 GA EG	10	5	50	48
● 24108T	2" x 18 GA EG	10	1	10	180



NT50AE2
2" 18 GA Brad Nailer



NT1850DE
2" 18 GA
Cordless Brad Nailer

ALSO FITS:
NT50GSP9

Fits most 18 gauge brad nailers

16 GA STRAIGHT FINISH NAILS

● 14200	1" x 16 GA EG	12	5	60	48
● 14201	1-1/4" x 16 GA EG	8	5	40	48
● 44201S	1-1/4" x 16 GA EG	10	1	10	175
● 14202	1-1/2" x 16 GA EG	12	2.5	30	48
● 44202S	1-1/2" x 16 GA EG	10	1	10	175
● 14203	1-3/4" x 16 GA EG	12	2.5	30	48
● 44203S	1-3/4" x 16 GA EG	10	1	10	120
● 14204	2" x 16 GA EG	12	2.5	30	48
● 44204S	2" x 16 GA EG	10	1	10	120
● 14206	2-1/2" x 16 GA EG	8	2.5	20	48
● 44206S	2-1/2" x 16 GA EG	10	1	10	100



NT65M2S
2-1/2" 16 GA Finish Nailer



NT1865DM
2-1/2" 16 GA
Cordless Finish Nailer

ALSO FITS:
NT65GSP9

Fits most 16 gauge straight finish nailers

20° (+/- 1°) 16 GA ANGLED FINISH NAILS

Item Code	Description	Boxes Per Ctn	M's Per Box	M's Per Ctn	Ctns/Skid
● 14412	1-1/4" x 16 GA EG	6	2	12	126
● 14413	1-1/2" x 16 GA EG	6	2	12	126
● 14418	2-1/2" x 16 GA EG	6	2	12	84



NT65GBP9
2-1/2" Gas Powered 16 GA
Angled Finish Nailer

Fits most 16 gauge angled finish nailers

15 GA "DA" ANGLE FINISH NAILS (33°-36°)

● 14302	1-1/4" x 15 GA BS	4	4	16	80
● 14303	1-1/2" x 15 GA BS	4	4	16	80
● 14304	1-3/4" x 15 GA BS	4	4	16	60
● 14305	2" x 15 GA BS	4	4	16	60
● 14306	2-1/4" x 15 GA BS	4	4	16	60
● 14308	2-1/2" x 15 GA BS	4	3	12	60
● 14307	2-1/2" x 14 GA BS	4	3	12	60
● 24201S	1-1/4" x 15 GA EG	10	1	10	105
● 14313	1-1/2" x 15 GA EG	4	4	16	60
● 24202S	1-1/2" x 15 GA EG	10	1	10	105
● 24203S	1-3/4" x 15 GA EG	10	1	10	104
● 14315	2" x 15 GA EG	4	4	16	60
● 24204S	2" x 15 GA EG	10	1	10	104
● 14318	2-1/2" x 15 GA EG	4	3	12	60
● 24206S	2-1/2" x 15 GA EG	10	1	10	78
● 14334	2" x 15 GA 304 SS	4	4	16	60
● 14335	2-1/4" x 15 GA 304 SS	4	4	16	60
● 14336	2-1/2" x 15 GA 304 SS	4	3	12	60



NT65MA4
2-1/2" 15 GA
Angled Finish Nailer



NT1865DMA
2-1/2" 15 GA Cordless
Angled Finish Nailer

ALSO FITS:
NT65GAP9

Fits most 15 gauge "DA" style angled finish nailers

Fastener Coating Key:

- Basic Bright
- Heat Treated / Hardened
- Electro Galvanized
- Hot Dipped Galvanized
- Stainless Steel

Fastener Description Key:

- AL = Aluminum
- BS = Basic Bright
- EG = Electro Galvanized
- HDG = Hot Dipped Galvanized
- HT = Heat Treated or Hardened
- SS = Stainless Steel
- SM = Smooth Shank
- RG = Ring Shank
- SC = Screw Shank
- FC = Fiber Cement Nail
- BL = Blunt Point
- DP = Diamond Point

18 GA 1/4" NARROW CROWN FINISH STAPLES

Item Code	Description	Boxes Per Ctn	M's Per Box	M's Per Ctn	Ctns/Skid
11099S	1/4" x 1/2" x 18 GA EG	10	5	50	69
11100S	1/4" x 5/8" x 18 GA EG	10	5	50	60
21100S	1/4" x 5/8" x 18 GA EG	10	1	10	240
11101S	1/4" x 3/4" x 18 GA EG	6	5	30	84
21101S	1/4" x 3/4" x 18 GA EG	10	1	10	240
11102S	1/4" x 7/8" x 18 GA EG	10	5	50	43
11103S	1/4" x 1" x 18 GA EG	6	5	30	69
21103S	1/4" x 1" x 18 GA EG	10	1	10	150
11104S	1/4" x 1-1/8" x 18 GA EG	6	5	30	60
11105S	1/4" x 1-1/4" x 18 GA EG	10	5	50	36
21105S	1/4" x 1-1/4" x 18 GA EG	10	1	10	150
11107S	1/4" x 1-1/2" x 18 GA EG	6	5	30	48
21107S	1/4" x 1-1/2" x 18 GA EG	10	1	10	150



N3804AB3
1/4" 18 GA Narrow Crown Stapler

Fits most 1/4 inch narrow crown staplers

16 GA 7/16" STANDARD CROWN STAPLES

11200	7/16" x 1" x 16 GA EG	-	-	10	60
11201	7/16" x 1-1/4" x 16 GA EG	-	-	10	60
11203H	7/16" x 1-1/2" x 16 GA EG	-	-	10	60
11205H	7/16" x 1-3/4" x 16 GA EG	-	-	10	60
11206	7/16" x 2" x 16 GA EG	-	-	10	60



N5008AC2
7/16" Standard Crown Stapler

Fits most 7/16 inch standard crown staplers

16 GA 1/2" MEDIUM CROWN STAPLES

11501	1/2" x 7/8" x 16 GA EG	-	-	10	60
11503	1/2" x 1" x 16 GA EG	-	-	10	60
11506	1/2" x 1-1/4" x 16 GA EG	-	-	10	60
11504	1/2" x 1-1/2" x 16 GA EG	-	-	10	60
11508	1/2" x 2" x 16 GA EG	-	-	10	60



N5010A
1/2" Medium Crown Stapler

Fits most 1/2 inch wide crown staplers

16 GA 15/16" WIDE CROWN STAPLES

Item Code	Description	Boxes Per Ctn	M's Per Box	M's Per Ctn	Ctns/Skid
11401	15/16" x 7/8" x 16 GA EG	-	-	10	60
11402	15/16" x 1" x 16 GA EG	-	-	10	60
11403	15/16" x 1-1/4" x 16 GA EG	-	-	10	60
11404	15/16" x 1-1/2" x 16 GA EG	-	-	10	60
11406	15/16" x 2" x 16 GA EG	-	-	5	75



N5021A
15/16" Wide Crown Stapler

Fits most 15/16 inch wide crown staplers

16 GA 1" WIDE CROWN STAPLES

11300	1" x 5/8" x 16 GA EG	-	-	10	60
11301	1" x 7/8" x 16 GA EG	-	-	10	60
11305H	1" x 3/4" x 16 GA EG	-	-	10	60
11315S	1" x 3/4" x 16 GA EG	8	1	8	100
11302H	1" x 1" x 16 GA EG	-	-	10	60
11303H	1" x 1-1/4" x 16 GA EG	-	-	10	60
11313S	1" x 1-1/4" x 16 GA EG	8	1	8	72
11304H	1" x 1-1/2" x 16 GA EG	-	-	10	60
11306	1" x 1-3/4" x 16 GA EG	-	-	5	75
11316S	1" x 1-3/4" x 16 GA EG	4	1	4	100
11307	1" x 2" x 16 GA EG	-	-	5	75



N5024A2
1" Wide Crown Stapler

Fits most 1 inch wide crown staplers

20 GA 7/16" CROWN HAMMER TACKER STAPLES

11801	7/16" x 5/16" x 20 GA EG	20	5	100	60
11802	7/16" x 3/8" x 20 GA EG	20	5	100	60
11803	7/16" x 1/2" x 20 GA EG	20	5	100	60

Fits most 7/16" crown A11 staplers

20 GA 1/2" CROWN HAMMER TACKER STAPLES

11699	1/2" x 5/16" x 20 GA EG	20	5	100	60
-------	-------------------------	----	---	-----	----

Fits most 1/2" crown DF-5000 staplers

HITACHI

**Follow. Tweet. Subscribe.
Review. Watch.**

Connect with Hitachi Power Tools



facebook.com/hitachipowertools



www.instagram.com/hitachipowertoolsusa/



@HitachiTools



youtube.com/hitachitoolcorner1



www.linkedin.com/company/hitachi-power-tools



[Read + Write
Tool Reviews](#)

www.hitachipowertools.com

Please visit our website at
www.hitachipowertools.com

For the dealer nearest you, call
1.800.546.1666

For more information, call or email
1.800.706.7337
reachcustomerservice@hitachi-powertools.com

For technical service, call
1.866.775.9429

Hitachi Koki, USA, Ltd.
1111 Broadway Avenue
Braselton, GA 30517

Hitachi Koki, Ltd.
Shinagawa Intercity Tower A
15-1, Konan 2-chome
Minato-ku, Tokyo 108-6020, Japan



7 54005 09018 3