

MAKE YOUR MARK

PRODUCT CATALOG



Our grandfather and Keson's founder, Roy Nosek, often said:

"If a job is worth doing, it's worth doing right."

We know he didn't say it first, but he said it first to our fathers who said it first to us. He showed us what it means through the way he lived his life and the way he treated people.

Be Positive.

Work Hard.

Respect Others.

Have Fun.

Act Ethically.

Do Good.

Make your mark.

We believe in these principles.

We strive to practice them in all that we do.

Keson products are for people who are passionate about their work and getting it done right.

We think this might be just about everyone.

Aaron Nosek
President

Jude Nosek Marketing Dave Nosek

TABLE OF CONTENTS MEASURING 2 **MEASURING WHEELS** 3 **SUMMARY HEAVY-DUTY** 8 **MEDIUM-DUTY** 11 LIGHT-DUTY 13 LONG TAPES 13 STEEL OPEN HOUSE STEEL CLOSED HOUSE 16 17 **FIBERGLASS OPEN HOUSE** FIBERGLASS CLOSED HOUSE 20 21 **MEASURING TAPES** 21 **PRO SERIES** 21 STANDARD SERIES **RUBBER GRIP SERIES** 22 22 **ECONOMY SERIES** 23 **SPECIALTY MEASURES** 23 POCKET RODS 23 DIAMETER TAPES 24 **SURVEYOR ROPES DEPTH GUAGES** 24 25 SQUARES **WOOD RULERS** 26 26 TALLY METERS 27 LEVELS **MARKING** 28 29 **CHALK LINE REELS** 29 **BIG MOUTH** STANDARD 30 31 CHALK **TWINE** 33 34 **PAINT** 35 **SPECIALTY MARKING** 35 **CRAYONS** PENCILS 35 35 HALF MOON CHALL 36 RAILROAD CHALL 36 37 **TAPE** 38 **FLAGS** 39 INDEX

PSCRIZ G


MEASURING WHEELS

LONG **TAPES**

POCKET TAPES

SPECIALTY

LEVELS

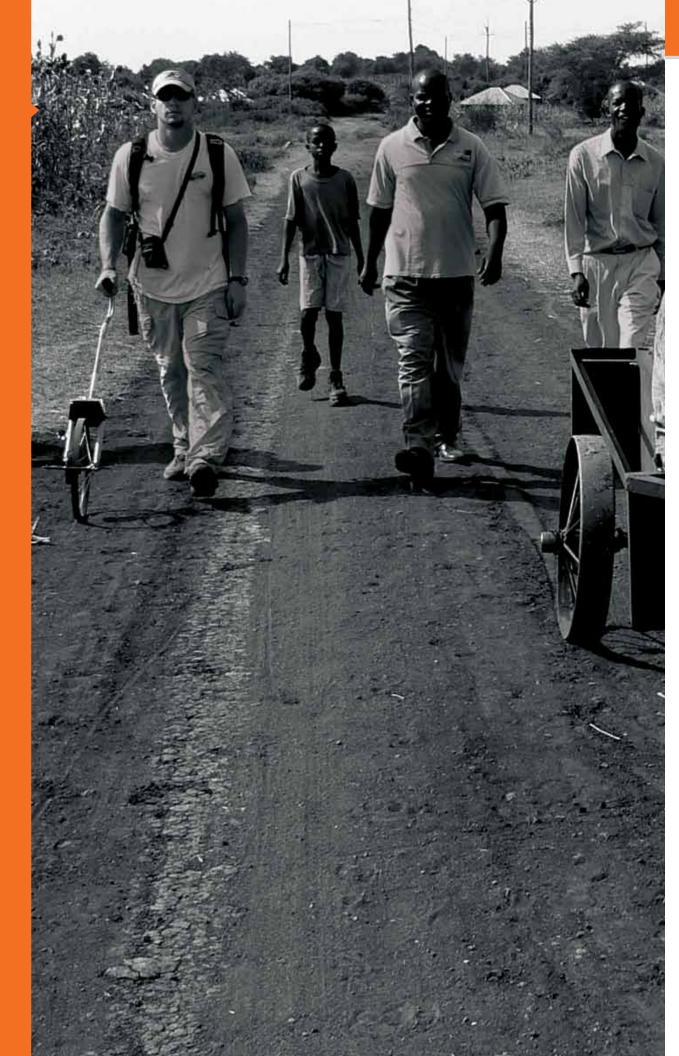

MEASURING WHEELS

BEST VALUE AND BIGGEST VARIETY



We work hard to make sure our measuring wheels are the best in the world. We are the new standard, leading the industry in the development of wheels with better features and more valuable benefits.

- Our counters are the sturdiest and the most reliable. Our wheels are designed to protect the counter, the most valuable component of the wheel.
- With the industry's strongest frames, the MP wheels have become the professional's choice.
- Longest Warranties Limited Lifetime Warranty on all but 3 models (2-year limited wheel warranty for MP401E, RRT6 and RRT12).
- Safety All of our large wheels come with a reflector to help keep you safe while you work.

ACCURACY

99.7% accurate on a flat, even track.

VARIETY

MP SERIES Metal Professional Series of highend durable wheels. We even have Steel Frame Electronic and Decimeter wheels, the only ones of their kind.

RRT SERIES New models with a trigger brake and a counter reset on the pistol grip handle.

RR KESONITE SERIES Our metal/resin compound wheels with the durability and shape memory of molded composite and the weight of metal.

RR SERIES LARGE Original RoadRunner Series of more economically priced wheels.

RR SERIES SMALL Original RoadRunner Series of more economically priced wheels.

PAINT APPLICATORS Various upside down spray paint applicators for any job.

Available in English, 10ths and Metric.

MADE IN THE USA





(except the RRT12 and RRT6) are assembled and tested in Aurora, IL.

DESIGN

We listen. We create new products and improve current models based on your feedback and our own expertise. We're continuously improving our products and processes to provide a better service.



METAL PROFESSIONAL WHEELS

These Metal Professional (MP) wheels are durable enough to stand up to the harshest field conditions. All feature the industry's best counters with the best counter protection.

FEATURES

- Innovative design simple, center-line functionality.
 Great balance.
- Huge numbers make for easy reading. Superior protection and placement of the counter the metal shelf keeps dirt and debris from coming into contact with the critical counter (5 digits, up to 99,999).
- Rugged 3/4 in. steel frame tough enough to handle any terrain.
- Compact fold-down easily folds in half for storage and portability.

Limited lifetime warranty / MP401E: 2-year limited wheel warranty.

MODEL	UNITS	DIA.	CIRC.	SPECIAL FEATURES
MP401E	ft. in. & ft. 10ths metric continous in.	15-1/2 in.	4 ft.	Steel frame Electronic brain: area, add radius, memory and more
MP401	ft.	15-1/2 in.	4 ft.	Best seller!
MP415	ft. & in. & 10ths	15-1/2 in.	4 ft.	Solid plastic wheel, dual scale
MP401P	ft.	15-1/2 in.	4 ft.	Plastic spoked wheel
MP301	ft.	11-1/2 in.	3 ft.	Best seller!
MP315M	m	.318 m	1 m	Solid wheel, metric
MP301M	m	.318 m	1 m	Steel spoked Metric wheel
MP301DM	m & dm	.318 m	1 m	Steel, decimeter
MP201	ft.	7-1/2 in.	2 ft.	Solid molded wheel



TOP READING, CENTER-LINE WHEELS

These innovative wheels feature a gear shaft driven counter placed above the wheel. This results in better balanced wheels.

FEATURES

- Enhanced grip pistol-type handle increases control and comfort.
- Re-set on the handle AND on the unit housing

 no more bending over, lifting the wheel or stepping on it to reset to zero. And the re-set on the housing is reinforced to protect it when re-setting with foot.
- Brake on pistol grip stops counting instantly. Stop adding lengths accidentally by putting the brake on exactly when you need it.
- Collapsing hinge snaps into extended lock with the flick of the wrist and it disconnects, rather than break, if you forget to press the unlock trigger.

2-year limited wheel warranty.

MODEL	UNITS	DIA.	CIRC.	SPECIAL FEATURES
RRT6 RRT12	ft. & in. ft. & in.	6 in. 12 in.	18 in. 3 ft.	Re-set trigger Re-set trigger



ROADRUNNER® LARGE

Measuring is quick and easy with Keson RoadRunner Series Measuring Wheels.

FEATURES

- Time-proven designs with over 20 years of improvement.
- 5-digit, easy-read, magnified counter (9,999 ft., or meters; 11 in., 10ths or dm) subtract in reverse.
- New 3-piece, pistol grip handle with quick-snap cam locks.

RR318N is the Keson Best Seller.

Limited lifetime warranty.

MODEL	UNITS	DIA.	CIRC.	SPECIAL FEATURES
RR318N RR310 RR3M	ft. & in. ft & 10ths metric	12-1/2 in. 12-1/2 in. .318 m	3 ft. 3 ft. 1 m	Best seller!
RR418 RR410	ft. & in. ft. & 10ths	15-1/2 in. 15-1/2 in.	4 ft. 4 ft.	Great for rough terrain Great for rough terrain
RR30 RR40	ft. & in.	12-1/2 in. 15-1/2 in.	3 ft. 4 ft.	Kesonite™ metal/resin composite! Kesonite™ metal/resin composite!



ROADRUNNER® SMALL

Measuring is quick and easy with Keson RoadRunner Series Measuring Wheels.

FEATURES

- These wheels are compact and often used for short runs and indoors.
- Popular with realtors, appraisers, roofers, police officers and homeowners.
- 5-digit, easy-read, magnified counter (9,999 ft., or meters; 11 in., 10ths or dm) subtract in reverse.

RR112, RR110 & RR10M — Weigh less than 2 pounds. The handle telescopes from 17 inches (fits into a toolbox or briefcase) up to 38 inches to measure without bending.

RR182 & RR102 — Greater stability when measuring.

	inie warranty.			
MODEL	UNITS	DIA.	CIRC.	SPECIAL FEATURES
RR112	ft. & in.	4 in.	1 ft.	Best seller!
RR110	ft. & 10ths	4 in.	1 ft.	
RR10M	metric	.097 m	.305 m	
RR182	ft. & in.	4 in.	1 ft.	Dual-wheel stability Dual-wheel stability
RR102	ft. & 10ths	4 in.	1 ft.	
RRPA182	ft. & in.	6 in.	18 in.	Paint applicator Paint applicator
RRPA18	ft. & in.	4 in.	1 ft.	

MP401E

WORLD'S STURDIEST MEASURING WHEEL

The MP401E is Keson's only electronic wheel with a steel frame. It is the world's sturdiest electronic measuring wheel and the easiest and most comfortable to use. It will stand up to the harshest conditions.

SWAN-NECK ERGONOMIC HANDLE

Our patent-pending "thumb-up" grip ensures less wrist strain and superior control.

RELIABLE INPUT SYSTEM: MAGNETIC SENSORS

Dust, dirt and other particles can disrupt a light beam used in competitive units. Our magnetic pick-up avoids these problems.

SEALED COUNTER ENCASEMENT

Designed to NEMA Class II standards, our counter housing ensures that it will not be damaged by rain. What's more, you can safely clean the entire wheel with a damp cloth.

COUNTER SIZE AND PLACEMENT

Our easy-to-read digital counter is in the most protected spot on the wheel. With the handle up, it is nearly impossible for the counter to come into contact with the ground. With the handle down, the roll bar offers solid protection. Counter requires 2 AA batteries (not included).

DISPLAY



Backlit 7 Digit LCD display for low-light usage. Up to 99,999 ft., 11 in. or 99,999.9 in tenths and metric.

MOLDED, ASSEMBLED AND TESTED IN THE U.S.A.

2-year limited wheel warranty.

MODEL	UPC (052837)	UNITS	DIA.	CIRC.	SPECIAL FEATURES
MP401E	026715	ft. in. & ft. 10ths metric continous in.	15-1/2 in.	4 ft.	Steel frame Electronic brain: area, add radius, memory and more



MP SERIES SPOKED WHEELS

MP401

Our best selling metal wheel. The 4-foot circumference wheel levels out uneven ground by spanning divets that smaller wheels would dip into. The wheel's size enables it to roll and register feet clicks at the best pace in the industry.

ADVANCED COUNTER TECHNOLOGY



Our geared Mechanical Clicker Counter features easy-to-read numbers.

MP301

Not far behind the MP401 in popularity, this slightly more compact wheel is a little lower in price without compromising any durability.

MP301M

Our 1 meter circumference wheel registers a single meter click per revolution. It's about the same size as the MP301.

MP301DM

This is an industry first — we have 10 evenly spaced pins around the 1 meter circumference of this wheel. The result is a metal wheel that registers in decimeters. It works perfectly fine for a brisk walking pace, however, it cannot be used at higher speeds as the counter does not have time to reset between pins.

MP401P

We mold 4-foot wheels for our RR series and for a less expensive alternative to the spoked wheels, we offer this model.

MODEL	UPC (052837)	UNITS	DIA.	CIRC.	SPECIAL FEATURES
MP301 MP301M MP301DM MP401 MP401P	026128 025763 026265 025756 026128	ft. m m, dm ft. ft.	11-1/2 in. .318 m .318 m 15-1/2 in. 5-1/2 in.	1 m 1 m	Best seller! Steel metric wheel Most accurate decimeter whee Best seller! Plastic wheel, metal frame



MP SERIES SOLID WHEELS

There are advantages to solid wheels. A sliding tool box or a shovel in the back of a truck has destroyed the precision of many a spoked wheel. Solid plastic wheels are not nearly as susceptible to these impacts. Also, solid Keson wheels do not go "out of round." You cannot bend them or flatten a portion of them. Lastly, twigs, sticks, tall grasses and other brush do not get caught up in the spokes or lock these wheels up. If your job takes you through fields or trails, consider a solid wheel option.

FEATURES

- No spokes to catch grass or sticks.
- No spokes to bend or snap.
- Solid molded wheels do not bend or go "out of round."

ADVANCED COUNTER TECHNOLOGY



Our geared Mechanical Clicker Counter features

easy-to-read numbers.

The counter measures feet and there are two scales molded into the hub of the wheel itself: inches on one side and 10ths on the other.

MP315M

MP415

On our metric version, decimeter graduations are molded into the hub of the wheel

MP201

Strong, rigid, 1-piece steel handle — strongest in the industry. Without a collapsing point in the handle, there is no weak point on this frame. This solid wheel is two inches wide, giving it better traction on sand, loose gravel and wet ground; a favorite among landscapers.

Limited life	etime warr	anty.		UISIAI V	
MODEL	UPC (052837)	UNITS	DIA.	CIRC.	SPECIAL FEATURES
MP201 MP315M MP415	008315 027040 026449	ft. m ft., in & ft., 10ths	7-1/2 in. 11-1/2 in. 15-1/2 in.	3 ft.	Solid molded wheel Solid, metric Solid, two scales wheel









RRT6 / RRT12

FEATURES

- Enhanced grip pistol-type handle increases control and comfort.
- Re-set on the handle AND on the unit housing no more bending over, lifting the wheel or stepping on it to reset to zero. Additionally, the re-set on the housing is reinforced to protect it when re-setting the counter with your foot.



Pistol grip handle and center line balance



Folds down to 1/2 its size

- Brake on pistol grip stops counting instantly. Stop adding lengths accidentally by putting the brake on exactly when you need it.
- Collapsing hinge snaps into extended lock with the flick of the wrist and it disconnects if you forget to press the unlock trigger.
- Center-line handle design with counter on top of wheel center of gravity aligned for perfect balance. This makes measuring easier and more accurate. The raised counter makes reading it
- Compact fold-down easily reduces to 1/2 its size for storage and portability. Storage is a snap.



5-digit, easy-read, magnified counter (measures 9,999 ft., 11 in.). That's almost two miles.

- Flip-down kickstand (Model RRT12) keeps the wheel upright when you need your hands free to perform other tasks and stays out of the way as you measure.
- Gear & shaft transmission for highest measurement accuracy and strength. No belts to stretch or fail.
- Handle lock lock your handle in place when you're not using the wheel. Our clamp protects the extension hinge from breaking.

2-vear limited wheel warranty

MODEL	UPC (052837)	UNITS	DIA.	CIRC.	SPECIAL FEATURES
RRT6	027415	in. & ft.	4"	1 ft.	Flip-down kickstand
RRT12	027412	in. & ft.	11-1/2"	3 ft.	

MOLDED, ASSEMBLED AND TESTED IN THE

KESONITE™ WHEELS

MADE OF KESONITE™

There are inherent vulnerabilities of die cast and metal spoked wheels. Everyday use requires that a wheel handle some rough treatment without dents and without bending.

Not all wheels are up to this. Our solution? Invent a new material. Kesonite is a strong, dense metal/resin composite. It holds its shape better than metal and it's stronger than a spoked or die cast wheel. The weight of the wheel makes it easier to use and more accurate on rough terrain.

Based on the design of the RR Series Large, a model with over 20 years of continuous improvement. Includes a NEW wheel design, material and safety reflector!

EASY-READ, MAGNIFIED COUNTER



5-digit, easy-read, magnified counter measures 9,999 feet, 11 inches (9999.9 ft on engineers' model and 999.9 meters on metric).

NOW WITH A 3-PC. PISTOL GRIP HANDLE!

The same outstanding features, benefits and reliability of our previous 2-piece handle version with the added convenience of our **new 3-piece**, **pistol grip handle**. **The twist locks have been replaced with quick-snap cam locks**. The new handle telescopes down to a **more compact 23 inches** for ease of transport and more compact storage.





RR318N

Over 20 years of continuous improvement — such as the new wheel design, kickstand and safety reflector! Extremely popular — tens of thousands sold every year.

HEAVY-DUTY

Heavy-duty, polycast wheel with improved, clean three-spoke design.

EASY-READ, MAGNIFIED COUNTER



5-digit, easy-read, magnified counter measures 9,999 feet, 11 inches (9999.9 ft. on the engineers' models and 9999.9 meters on metric).

NOW WITH A 3-PC. PISTOL GRIP HANDLE!

The same outstanding features, benefits and reliability of our previous 2-piece handle version with the added convenience of our **new 3-piece**, **pistol grip handle. The twist locks have been replaced with quick-snap cam locks.** The new handle telescopes down to a **more compact 23 inches** for ease of transport and more compact storage.

Limited lifetime warranty.

Lilling a mic	ciiiic waii	arrey.			
MODEL	UPC (052837)	UNITS	DIA.	CIRC.	SPECIAL FEATURES
RR30 RR3010 RR30M	026425 026524 026500	ft., in. ft., 10ths m, dm	11-1/2 in. 11-1/2 in. .318 m	3 ft. 3 ft. 1 m	Increased strength & weight Increased strength & weight Increased strength & weight
RR40	026463	ft., in.	15-1/2 in.	4 ft.	Increased strength & weight

MODEL	UPC (052837)	UNITS	DIA.	CIRC.	SPECIAL FEATURES
RR318N	008506	ft., in.	12-1/2 in.	3 ft.	Best seller!
RR310	010172	ft., 10ths	12-1/2 in.	3 ft.	
RR3M	010189	m, dm	.318 m	1 m	
RR418	010196	ft., in.	15-1/2 in.	4 ft.	Great for rough terrain
RR410	010202	ft., 10ths	15-1/2 in.	4 ft.	Great for rough terrain

ROADRUNNER INDOOR/SHORT RUN WHEELS

Smaller 1-foot wheels combine Keson quality and reliability with convenient size and light weight. Typically used in short run and indoor applications these products are compact and very reliable. It's easy to measure curved, horizontal and asymmetrical surfaces.

These products are popular with realtors, appraisers, police officers and homeowners. You can measure alone, and you can measure faster than two people with a tape measure. Many of our customers keep one of these wheels as an emergency backup to their regular wheels.

EASY-READ, MAGNIFIED COUNTER



The single wheel and dual wheel both have a 5-digit, easy-read, magnified counter that measures 9,999 feet, 11 inches without resetting. That's almost two miles.

SINGLE WHEEL

FEATURES

- Weighs less than 2 pounds.
- The handle telescopes from 17 inches (fits into a toolbox or briefcase) up to 38 inches.

Limited lifetime warranty.


Emilica metime warranty.					
MODEL	UPC (052837)	UNITS	DIA.	CIRC.	SPECIAL FEATURES
RR112 RR110 RR10M	020058 020065 020072	ft., in. ft., 10ths m, dm	4 in. 4 in. .097 m	1 ft. 1 ft. .305 m	Best seller!

DUAL WHEEL

Keson has patented a raised reset button that enables you to re-set the counter with your foot. We have improved the supporting structure around the reset so that it can handle foot taps to zero the counter.

The dual wheel provides greater stability when measuring, making it easier to maintain a straight line as you walk.

The handle telescopes from 20 inches (fits into a toolbox or briefcase) up to 42 inches.



MODEL	UPC (052837)	UNITS	DIA.	CIRC.	SPECIAL FEATURES	
RR182	010592	ft., in.	4 in.	1 ft.	Dual-wheel stability	
RR102	010608	ft., 10ths	4 in.	1 ft.	Dual-wheel stability	





PAINT APPLICATORS

Measure and mark simultaneously with **RRPA18** and **RRPA182**. These lightweight tools feature a trigger just under the pistol grip. Engaging the trigger fires off a burst of upside-down spray paint precisely where it's needed.

You can measure and mark alone, and you can work more quickly than 2 or 3 people with a tape measure and spray gun.

FEATURES



5-digit, easy-read, magnified counter that measures 9,999 feet, 11 inches without resetting. That's almost two miles.

- Pistol grip and trigger to spray paint exactly where you want it.
- Weather resistant housing protects the counter.
- Precision wheels molded from high-grade ABS, providing a lifetime of accurate measuring.
- Paint can sleeve fits all standard US-style inverted aerosol paint cans.



Limited lifetime warranty.

MODEL	UPC (052837)	SPECIAL FEATURES	
PA14	010066	Handheld applicator	
PA35	010059	Spray as you walk applicator	

Limited lifetime warranty.

MODEL	UPC (052837)	UNITS	CIRC.	SPECIAL FEATURES	
RRPA18	022298	ft. & in.	12 in.	Single wheel with applicator	
RRPA182	020768	ft. & in.	17-5/8 in.	Dual wheel with applicator	

800.345.3766 • FAX 800.345.8849 • WWW.KESON.COM • SALESORDERS@KESON.COM

OPEN HOUSE STEEL TAPES

MEASURING TAPES THAT ARE MADE TO LAST



DOUBLE NYLON-COATED STEEL LONG TAPES

For over 40 years, Keson steel tapes have met the highest standards of accuracy for surveyor quality measurements. They resist breakage and damage under the toughest field conditions. We understand that these tapes are critical to your profession. That's something we take very seriously, which is why we supply the best possible tapes we can.

BLADES

Keson nylon-coated steel tapes are constructed with a double layered .2mm nylon, permanently bonded over a center core of 13mm steel. Our multi-layer construction assures corrosion resistance (even to salt water) and provides at least three times the usual tape life.

HOUSINGS


We have designed a variety of housing types for our customers: Stainless Steel (SNR), 3X High-Speed Rewind (NRS) and standard 1X rewind (NR). Double riveted or screwed cases, metal reinforced handles and shovel-style, rubber grips are standard on all of our offerings.

BLADE WIDTH

3/8-inch wide blades are about 10-20% lighter than 1/2-inch wide blades, without sacrificing durability. The thinner blades are also less likely to drift if the wind kicks up.

PRODUCT SELECTION

Keson offers the widest product selection of double nylon-coated blades. Units, attachments and zero points vary because of the precise needs of our many customers.

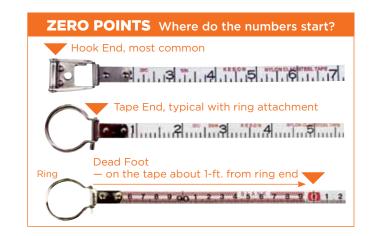



SNR SERIES STAINLESS STEEL HOUSING, NYLON-REINFORCED STEEL BLADE

The world's best steel long tape in a housing that's built to last!

FEATURES

- The strongest housing (stainless steel) on the market!
- Tough, double nylon-coated steel blade assures long life under field abuse
- Rubber-grip shovel handle for comfortable, rapid reeling.
- Metal crank handle for durability.
- Housing reinforced with rivets for superior strength.

Limited lifetime warranty.

Limited metime warranty.							
MODEL	UPC (052837)	LENGTH	UNITS	ZERO PT.	ATTACHMENT		
SNR18100	025986	100 ft.	ft., in., 1/8	hook end	hook		
SNR10100	026057	100 ft.	ft., 1/10, 1/100	tape end + 1 ft	ring		
SNR10100H	026190	100 ft.	ft., 1/10, 1/100	hook end	hook		
SNR18200	025997	200 ft.	ft., in., 1/8	hook end	hook		
SNR10200	026067	200 ft.	ft., 1/10, 1/100	tape end + 1 ft	ring		
SNR10200H	026259	200 ft.	ft., 1/10, 1/100	hook end	hook		
SNR18300	003501	300 ft.	ft., in., 1/8	hook end	hook		
SNR10300	003600	300 ft.	ft., 1/10, 1/100	tape end + 1 ft	ring		
SNR10300E	022854	300 ft.	ft., 1/10, 1/100	tape end	ring		
SNR10300H	003624	300 ft.	ft., 1/10, 1/100	hook end	hook		
SNR100M	003808	100 m	metric (2 mm)	tape end + 1 ft.	ring		
SNR100ME	003907	100 m	metric (2 mm)	tape end	ring		
SNR100MH	022779	100 m	metric (2 mm)	tape end	hook		



NRS SERIES NYLON-REINFORCED STEEL BLADE, SPEED REWIND

3X rewind, high-visibility housing!

FEATURES

- Metal, planetary gearing for super-fast rewind & no more stripped gears.
- High-visibility orange polycarbonate case.
- Tough, double nylon-coated steel blade assures long life under field use.
- Rubber-grip shovel handle for comfortable, rapid reeling.
- Wide base crank with metal reinforcement for increased durability.

Limited inetime	warranty.				
MODEL	UPC (052837)	LENGTH	UNITS	ZERO PT.	ATTACHMENT
NRS18100	020980	100 ft.	ft., in., 1/8	hook end	hook
NRS10100H	022687	100 ft.	ft., 1/10, 1/100	hook end	hook
NRS18200	021000	200 ft.	ft., in., 1/8	hook end	hook
NRS10200H	022694	200 ft.	ft., 1/10, 1/100	hook end	hook
NRS18300	021017	300 ft.	ft., in., 1/8	hook end	hook
NRS10300H	022670	300 ft.	ft., 1/10, 1/100	hook end	hook
NRS30M	027484	30 m	m, dm, cm	hook end	hook
NRS50M	027491	50 m	m, dm, cm	hook end	hook
NRS100M	027507	100 m	m, dm, cm	hook end	hook

NR SERIES NYLON-REINFORCED STEEL BLADE

A Keson best seller! Since 1968 this style of Keson steel tape has been providing customers with accurate measurements. They are used in the harshest conditions in which people measure, and they stand to the only test that matters: field performance.

We have made modifications to the housing over the years:

- Better plastic and molding shapes for increased durability.
- Double screws to hold the housing together in the event of a drop.
- Better blade axle to reduce breakage due to the weight of the tape if dropped.

For years we've been honoring warranty dates long past a single year, so we are now proud to offer a limited lifetime warranty on these products.

FEATURES

- Tough, double nylon-coated steel blades.
- Break-resistant under severe use in the field.
- 3/8-inch wide blade reduces wind drift and tape weight.
- Metal-reinforced crank handle for durability.



Limited lifetime warranty.

MODEL	UPC (052837)	LENGTH	UNITS	ZERO PT.	ATTACHMENT
NR18100	001903	100 ft.	ft., in., 1/8	hook end	hook
NR10100	002207	100 ft.	ft., 1/10, 1/100	tape end + 1 ft.	ring
NR10100E	022823	100 ft.	ft., 1/10, 1/100	tape end	ring
NR10100H	002504	100 ft.	ft., 1/10, 1/100	hook end	hook
NR18165	009910	165 ft.	ft., in., 1/8	hook end	hook
NR10165	002211	165 ft.	ft., 1/10, 1/100	tape end + 1 ft.	ring
NR10165E	022630	165 ft.	ft., 1/10, 1/100	tape end	ring
NR10165H	002511	165 ft.	ft., 1/10, 1/100	hook end	hook
NR18200	001927	200 ft.	ft., in., 1/8	hook end	hook
NR10200	002221	200 ft.	ft., 1/10, 1/100	tape end + 1 ft.	ring
NR10200E	022847	200 ft.	ft., 1/10, 1/100	tape end	ring
NR10200H	002528	200 ft.	ft., 1/10, 1/100	hook end	hook
NR30M	002801	30 m	metric (2 mm)	tape end + 1 ft.	ring
NR30ME	003105	30 m	metric (2 mm)	tape end	ring
NR30MH	022748	30 m	metric (2 mm)	hook end	hook
NR50M	002825	50 m	metric (2 mm)	tape end + 1 ft.	ring
NR50ME	003129	50 m	metric (2 mm)	tape end	ring
NR50MH	022755	50 m	metric (2 mm)	hook end	hook
NR60M	002818	60 m	metric (2 mm)	tape end + 1 ft.	ring
NR60ME	003112	60 m	metric (2 mm)	tape end	ring
NR60MH	022762	60 m	metric (2 mm)	hook end	hook

CLOSED HOUSE STEEL TAPES



ST_3X & ST_Y SERIES

This Steel Tape (ST_3X and ST_Y) series is great for those who need a longer tape but like the blade protection that a closed house offers. They slip easily into a pocket, purse, tool pouch or tool belt. The ST_Y versions come with a belt clip. The cases are protected by an impact reducing rubber grip that makes it easier to hang on to them.

FEATURES

- Nylon-coated blade for superior durability and rust resistance.
- 3X gearing for quick rewind (part numbers that end in 3X).
- High-impact resistant case with full-rubber, non-slip grip.
- Ideal for real estate agents, general surveying, civil engineering, building construction, highway and road construction, home building, mining, etc.
- 3/8-inch wide blade bends easily but not affected by wind like wider tapes.

Limited lifetime warranty.

MODEL	UPC (052837)	LENGTH	UNITS	ZERO PT.	ATTACHMENT	SPECIAL FEATURES
ST18503X	027248	50 ft.	ft. & in.	hook end	hook	3X high-speed rewind 3X high-speed rewind
ST10503X	026531	50 ft.	ft. & 10ths	hook end	hook	
ST181003X	026531	100 ft.	ft. & in.	hook end	hook	3X high-speed rewind 3X high-speed rewind
ST101003X	027118	100 ft.	ft. & 10ths	hook end	hook	
ST1850Y	023509	50 ft.	ft. & in.	hook end	hook	Standard rewind
ST18100Y	023516	100 ft.	ft. & in.	hook end	hook	Standard rewind

ST SERIES Our standard Steel Ta most durable metal h



ST10018

Our standard Steel Tape (ST) series tapes come in the industry's most durable metal housing. These long, steel tapes have a compact, closed, metal case that fits nicely in your hand. The flush-folding crank pops up for easy rewinding. If you're measuring alone, the metal catch hook is set at zero, so there's no need for a correction. The graduations are painted black on a durable, bright-yellow steel blade.

FEATURES

- Closed, metal housing protects the tape.
- Compact, fits easily into briefcase or even a pocket.
- Rewind handle folds flush.

MODEL	UPC (052837)	LENGTH	UNITS	ZERO PT.	ATTACHMENT
ST5018	010394	50 ft.	ft., in., 1/8	hook end	hook
ST5010	010721	50 ft.	ft., 1/10, 1/100		hook
ST10018	010387	100 ft.	ft., in., 1/8	hook end	hook
ST10010	010738	100 ft.	ft., 1/10, 1/100	hook end	hook

OPEN HOUSE FIBERGLASS TAPES





FIBERGLASS LONG TAPES

For over 40 years, Keson fiberglass tapes have met the highest standards of accuracy for quality measurements. They resist breakage and damage under the toughest field conditions. We understand that these tapes are critical to your profession. That's something we take very seriously, and that is why we supply the best possible tapes we can. We cover each blade with two coats of PVC, one to bind the fiberglass strands and a second over the printed units, so the numbers don't wear away.

"This product is used by many cavers as the number one measuring tool for underground survey of caves. We have taken these tapes well over 500ft underground and have dragged them through some of the worst mud, grit and grime you can imagine. We have gone to the point of completely covering the tape with mud—so much mud you cannot even see the numbers. We just washed the tape in water and it's like new again. Nowhere above ground are you ever going to encounter conditions like what we put these tapes through. You get what you pay for and Keson tapes are just that indestructible!" Cave Surveyor, Kelly

BLADES

Keson fiberglass reinforced tapes are designed to withstand more wear and tear than any other type of fiberglass measuring tape. They contain 40,000 fiberglass strands for greater tensile strength and superior accuracy when tension is applied. Two coats of PVC protect the tapes from breaking, and a blade shield adds strength to the attachment (the point at which most fiberglass tapes break). These tapes have proven dielectric strength of 200,000 V/M to assure your safety from electrical hazards.

FIBER COUNT & TAPE WEIGHT

The weight of a tape is a factor to consider if you do a great deal of measuring. With our heavy-duty fiberglass tapes, we pack the strongest possible fibers—and the greatest number—into the thinnest possible tapes to keep the weights down while keeping the blades strong.

ELONGATION

Tapes elongate (stretch) when excessive pulling force is applied. Keson heavy-duty fiberglass always returns to its proper length after the pulling stops. The reason is our high fiberglass strand count. To keep your fiberglass measurements as accurate as possible, don't pull too hard when making your measurements.

HOUSINGS

We have designed a variety of housing types for our customers: Freewheeling Long Tape (FLT), 3X High-Speed Rewind (OTRS) and Standard 1X Rewind (OTR). Double riveted or screwed cases, metal reinforced handles and shovel-style, rubber grips are standard on all of our offerings.

PRODUCT SELECTION

Keson offers the widest product selection of fiberglass blades. Units, attachments and zero points vary because of the precise needs of our many customers.





FLT SERIES

FEATURES

- Ergonomically designed housing handle with tactile rubber grip for balance and comfort.
- Freewheeling hub for fast pay out of blade without spinning crank. No more busted knuckles! Re-engage with the push of a button.
- Massive crank arm with large, easy-grip knob for comfort and reliability. Knob folds down for storage.
- Locking pawl enables proper blade tension during measurement.
- Rubber no-slip foot for steady placement during measurement.

Limited lifetime warranty.

MODEL	UPC (052837)	LENGTH	UNITS.	ZERO PT.	ATTACHMENT
FLT18M165 FLT18165 FLT10165	O27163 O27170 O27187	165 ft./50m 165 ft. 165 ft.	2-sided, ft., in. & metric ft., in. ft., 10ths	tape end tape end tape end	hook hook hook
FLT50MM	027194	50 m	2-sided, metric 2mm & 5mm	tape end	hook
FLT18200 FLT10200 FLT1810200 FLT18M200	027156 027132 027316 027149	200 ft. 200 ft. 200 ft. 200 ft./60m	ft., In. ft., 10ths 2-sided, ft., in. & ft., 10ths 2-sided, ft., in. & metric	tape end tape end tape end tape end	hook hook hook hook

200_k Files Fig. 13.5 Substitution of the control of the control

OTRS18200

OTRS SERIES 3X HIGH-SPEED REWIND

Our best offering in the fiberglass housings. The OTRS series pairs an incredibly durable housing with our excellent blades. The housing features double rivets that provide added strength. End caps on the arms further protect the housing. The shovel handle with rubber over-mold keeps your grip sure and comfortable.

The 3X high-speed rewind gearing is made up of metal, strip-proof gearing.

FEATURES

- Metal, strip-proof, gearing.
- Blade and housing are rust & break-resistant.
- Rubber shovel handle for a comfortable, "no-slip" grip.
- Metal-reinforced crank handle lasts longer.
- Double-throat rollers guide the blade return and prevent the tape from twisting.
- Double-riveted housing for durability.

MODEL	UPC (052837)	LENGTH	UNITS.	ZERO PT.	ATTACHMENT
OTRS18100	027214	100 ft.	ft., in., 1/8	hook end	hook
OTRS10100H	026746	100 ft.	ft., 1/10, 1/100	tape end	hook
OTRS18200	027221	200 ft.	ft., in., 1/8	hook end	hook
OTRS10200H	026753	200 ft.	ft., 1/10, 1/100	tape end	hook
OTRS1810200E	026005	200 ft.	ft., in., 1/8 & ft., 1/10, 1/100	tape end	ring
OTRS18300	027238	300 ft.	ft., in., 1/8	hook end	hook
OTRS10300H	026760	300 ft.	ft., 1/10, 1/100	tape end	hook
OTRS1810300E	026012	300 ft.	ft., in., 1/8 & ft., 1/10, 1/100	tape end	ring

OTR SERIESOPEN-TYPE REEL, ULTRA-GLASS BLADE

THE WORLD'S PREMIER FIBERGLASS LONG TAPE IN A BUILT-FOR-DURABILITY HOUSING!

A Keson best seller! Since 1968 this style of Keson fiberglass tape has been providing customers with accurate measurements. They are used in the harshest conditions in which people measure, and they stand to the only test that matters: field performance.

We have made modifications to the housing over the years:

- Better plastic and molding shapes for increased durability.
- Double screws to hold the housing together in the event of a drop.
- Better blade axle to reduce breakage due to the weight of the tape if dropped.

We've been honoring warranty dates long past a single year and we are now proud to offer a limited lifetime warranty on these products.

FEATURES

- Tough, molded handle is easy to grasp.
- The crank handle is reinforced with metal to provide years of rugged use.
- Double-throat rollers guide the blade return and prevent the tape from twisting.
- The shovel handle is ideal for rapid reeling.

Limited lifetime warranty.

Limited lifetime warranty.						
MODEL	UPC (052837)	LENGTH	UNITS.	ZERO PT.	ATTACHMENT	
OTR1850 OTR181050 OTR18M50 OTR1050 OTR10M50	000203 000807 000500 001408 001101	50 ft. 50 ft. 50 ft. 50 ft. 50 ft.	ft., in., 1/8 ft., in., 1/8 & ft., 1/10, 1/100 ft., in., 1/8 & metric (2 mm) ft., 1/10, 1/100 ft., 1/10, 1/100 & metric (2 mm)	hook end hook end hook end hook end	hook hook hook hook hook	
OTR18100 OTR1810100 OTR18M100 OTR10100 OTR10M100	000210 000814 000517 001415 001118	100 ft. 100 ft. 100 ft. 100 ft. 100 ft.	ft., in., 1/8 ft., in., 1/8 & ft., 1/10, 1/100 ft., in., 1/8 & metric (2 mm) ft., 1/10, 1/100 ft., 1/10, 1/100 & metric (2 mm)	hook end hook end hook end hook end	hook hook hook hook hook	
OTR18165 OTR1810165 OTR18M165 OTR10165 OTR10M165	000227 000821 000524 001422 001125	165 ft. 165 ft. 165 ft. 165 ft. 165 ft.	ft., in., 1/8 ft., in., 1/8 & ft., 1/10, 1/100 ft., in., 1/8 & metric (2 mm) ft., 1/10, 1/100 ft., 1/10, 1/100 & metric (2 mm)	hook end hook end hook end hook end	hook hook hook hook hook	
OTR18200 OTR1810200 OTR18M200 OTR10200 OTR10M200	000234 000838 000531 001439 001132	200 ft. 200 ft. 200 ft. 200 ft. 200 ft.	ft., in., 1/8 ft., in., 1/8 & ft., 1/10, 1/100 ft., in., 1/8 & metric (2 mm) ft., 1/10, 1/100 ft., 1/10, 1/100 & metric (2 mm)	hook end hook end hook end hook end	hook hook hook hook hook	
OTR18300 OTR1810300 OTR18M300 OTR10300 OTR10M300	000241 000845 000548 001446 001149	300 ft. 300 ft. 300 ft. 300 ft. 300 ft.	ft., in., 1/8 ft., in., 1/8 & ft., 1/10, 1/100 ft., in., 1/8 & metric (2 mm) ft., 1/10, 1/100 ft., 1/10, 1/100 & metric (2 mm)	hook end hook end hook end hook end	hook hook hook hook hook	
OTR15M OTR30M OTR30MM	001040 010417 010455	15 m 30 m 30 m	metric (2 mm) metric (2 mm) & metric (5 mm)	hook end hook end hook end	hook hook hook	
OTRSOMM OTRSOMM	010455 010424 010462	50 m 50 m	metric (2 mm) & metric (5 mm) metric (2 mm) metric (2 mm) & metric (5 mm)	hook end hook end	hook hook	
OTR100M OTR100MM	010431 020027	100 m 100 m	metric (2 mm) metric (2 mm) & metric (5 mm)	hook end hook end	hook hook	



CLOSED HOUSE FIBERGLASS TAPES



Harris Lands and State of the Lands and the

MC SERIES

"This is it! If you work with a tape measure every day, this is the tape. It's accurate and reliable. I have been working with one for the past 12 years." Appraiser, Scott

We know that blade protection is key to a long tape life. Our metal case (MC) keeps the blades safe. These long, fiberglass tapes have a compact, closed metal case that fits nicely in your hand. The flush-folding crank pops up for easy rewinding. If you're measuring alone, the metal catch hook is set at zero, so there's no need for a correction. These are very popular with users that primarily do interior measurements.

FEATURES

- Heavy-duty blades with 40,000 strands of fiberglass ensures a long life under the most demanding field use.
- Stretch-resistant, extremely resilient.
- Closed, metal housing protects the tape.
- Blade is 1/2-inch.
- The crank handle is metal to provide years of rugged use.
- Double-throat rollers guide the blade return and prevent the tape from twisting.

MC18100

	warrancy.				
MODEL	UPC (052837)	LENGTH	UNITS.	ZERO PT.	ATTACHMENT
MC1850 MC181050 MC18M50 MC1050 MC10M50	000104 000708 000401 001309 001002	50 ft. 50 ft. 50 ft. 50 ft. 50 ft.	ft., in., 1/8 ft., in., 1/8 & ft., 1/10, 1/100 ft., in., 1/8 & metric (2 mm) ft., 1/10, 1/100 ft., 1/10, 1/100 & metric (2 mm)	hook end hook end hook end hook end	hook hook hook hook hook
MC18100 MC1810100 MC18M100 MC10100 MC10M100	000111 000715 000418 001316 001019	100 ft. 100 ft. 100 ft. 100 ft. 100 ft.	ft., in., 1/8 ft., in., 1/8 & ft., 1/10, 1/100 ft., in., 1/8 & metric (2 mm) ft., 1/10, 1/100 ft., 1/10, 1/100 & metric (2 mm)	hook end hook end hook end hook end	hook hook hook hook hook
MC18165 MC10165 MC10M165	000128 001323 001026	165 ft. 165 ft. 165 ft.	ft., in., 1/8 ft., 1/10, 1/100 ft., 1/10, 1/100 & metric (2 mm)	hook end hook end	hook hook hook

MEASURING TAPES

PRO SERIES

Keson PG Pro Series tapes are built to last. They feature a stainless-steel housing for increased durability, high-impact resistance and better blade protection. The nylon-coated blades provide extended blade life. These blades are white for increased readability. The true-zero, 4-riveted hook offers superior strength. The positive blade lock and reverse button are standard. All have a handy belt-clip. Tapes are printed with 16 inch center and 19.3 inch rafter markings. All 18 series tapes feature continuous inches.

FEATURES

- Stainless Steel Housing adds strength.
- Nylon-coated, no-glare white blade.
- Rubber grip prevents slips and protects the tape if it does happen to fall.
- Belt clip.

- Positive lock and reverse—the most common and practical lock mechanism.
- "Bumper" blade return cushions the impact of the hook upon return.
- Blade width is a standard 1 inch.
- Continuous inches.



Limited warranty.

MODEL	UPC (052837)	LENGTH	UNITS	WIDTH	STAND OUT
PGPRO1825	027545	25 ft.	ft., in., 1/8, 1/16	1 in.	8-9 ft.
PGPRO1830	027552	30 ft.	ft., in., 1/8, 1/16	1 in.	8-9 ft.

STANDARD SERIES

FANTASTIC TAPES AT A REASONABLE PRICE

Keson PG tapes are built to last. The nylon-coated blades provide extended blade life. The true-zero, 3-riveted hook offers superior strength. The positive blade lock and reverse button are standard. All have a handy belt-clip. Tapes are printed with 16-in, center and 19.3-in, rafter markings, All 18 series tapes feature continuous inches.

FEATURES

- Rubber grip prevents slips and protects the tape if it does happen to fall.
- Nylon-coated, no-glare yellow blade.
- Chrome-plated tape armor adds strength. Continuous inches.
- Positive lock and reverse the most common and practical lock mechanism.
- "Bumper" blade return cushions the impact of the hook upon return.
- Blade width is a standard 1 inch.
- 16 inch studs labeled.
- 19.2 inch truss labeled.

Limited warranty.

MODEL	UPC (052837)	LENGTH	UNITS	WIDTH	STAND OUT	SPECIAL FEATURES
PG1816	004102	16 ft.	ft., in., 1/8, 1/16	1 in.	8-9 ft.	
PG1016	004300	16 ft.	ft., 1/10, 1/100	1 in.	8-9 ft.	
PG1825	004010	25 ft.	ft., in., 1/8, 1/16	1 in.	8-9 ft.	
PG181025	010349	25 ft.	ft., in., 1/8, 1/16 & ft., 1/10, 1/100	1 in.	8-9 ft.	
PG18M25	004706	25 ft.	ft., in., 1/8, 1/16 & metric	1 in.	8-9 ft.	
PG1025	004201	25 ft.	ft., 1/10, 1/100	1 in.	8-9 ft.	
PG10M25	010356	25 ft.	ft., 1/10, 1/100 & metric	1 in.	8-9 ft.	
PG1830	004355	30 ft.	ft., in., 1/8, 1/16	1 in.	8-9 ft.	
PG1835	021994	35 ft.	ft., in., 1/8, 1/16	1 in.	8-9 ft.	
PG1825SS	027514	25 ft.	ft., in. & ft	1 in.	8-9 ft.	100% stainless steel
PG181025SS	026043	25 ft.	ft., in. & ft., 10ths	1 in.	8-9 ft.	100% stainless steel
PG1825MAG	027521	25 ft.	ft., in. & ft	1 in.	8-9 ft.	Magnetic tip
PG1825WIDE	027538	25 ft.	ft., in. & ft	1 in.	9+ ft.	1-3/16 in. width blade



PG181025



RUBBER GRIP SERIES

Our Rubber Grip tapes offer a different feel from our Standard and Pro offering. The rubber boot protects the tape blade and housing from accidental drops. The RG series comes with lacquer-coated blades.

FEATURES

- Rubber boot provides high impact resistance and comfortable grip.
- Belt clip.
- Positive lock and reverse the most common and practical lock mechanism.
- "Bumper" blade return cushions the impact of the hook upon return.
- Blade width is a standard 1 inch.
- Continuous inches.
- 16 inch studs labeled.
- 19.2 inch truss labeled

Limited warranty.

MODEL	UPC LENGTH UNITS (052837)		WIDTH	STAND OUT	
PG1825RG	020850	25 ft.	ft., in., 1/8, 1/16	1 in.	6 - 8 ft.
PG18M25RG	022045	25 ft.	ft., in., 1/8, 1/16 & metric	1 in.	6 - 8 ft.
PG1830RG	020867	30 ft.	ft., in., 1/8, 1/16	1 in.	6 - 8 ft.
PG1835RG	022007	35 ft.	ft., in., 1/8, 1/16	1 in.	6 - 8 ft.

PG25

ECONOMY SERIES

Co-molded grip on a plastic housing, this series comes with lacquer-coated blades. They also have a side brake for slowing the blade return or stopping it cold during retraction. Good tapes at a great price.

FEATURES

- Side brake for slowing or stopping blade retraction
- Belt clip
- Positive lock and reverse—the most common and practical lock mechanism.
- "Bumper" blade return cushions the impact of the hook upon return.
- Blade width is a standard 1 inch.
- Continuous inches.
- 16 inch studs labeled
- 19.2 inch truss labeled

Limited warranty.

MODEL	UPC (052837)	LENGTH	UNITS	WIDTH	STAND OUT
PG25	022076	25 ft.	ft., in., 1/8, 1/16	1 in	6 - 8 ft.
PG2510	026371	25 ft.	ft., 1/10, 1/100	1 in	6 - 8 ft.
PG7.5M	026739	7.5 ft.	cm, mm	1 in	2 - 2.3 m

SPECIALTY MEASURES

POCKET RODS

This unique grading rod is compact like a tape measure. Simply remove the nylon-coated steel blade from the case and you have a convenient 6-1/2 foot vertical-reading leveling rod. Each case has a built-in target. When finished, just slide back into the case. It's ideal for checking a grade without having to carry a full-size rod.

The Pocket Rod is ideal for foundation work, grading, swimming pools and construction photo records. The nylon-coated blade protects the graduations from moisture and wear. Easy-to-read numbers are printed on both sides, and the blade also features a built-in target for sighting. Also, it has a heavy-duty end hook. When you're through, the blade stores in its own sturdy case. Perfect for photographs that require scale. A police and insurance adjuster favorite!

FEATURES

- Built-in target on 2 sides.
- Nylon coated facing not affected by moisture.
- Non-glare surface.
- Convenient surveyors pole.
- Heavy-duty end hook.

"Markings are clearly visible for photographing. I use it for appraisal work for damaged vehicles. No other product can be seen clearly in pictures while capturing the object behind it."

Damage Appraiser, David

Limited warranty.

MODEL	UPC (052837)	LENGTH	UNITS	ZERO PT.
PR610 PR618	005208 005307	6 ft. 6 ft.	ft. & 10ths ft. & in.	hook end hook end
PR2M	020416	2 m	metric	hook end

DIAMETER TAPES

The diameter of a circular object, like a tree or a pipe, is easily measured using a Keson diameter tape. The tape is calibrated in units of 3.14(pi) inches. The tape is actually measuring the tree or pipe's circumference, but the units on the tape are adjusted by pi enabling you to get a diameter by wrapping this tape around a circular object.

FEATURES

- Automatic rewind.
- Lacquer-coated white blades with black printing.

Limited warranty.

MODEL	UPC (052837)	LENGTH	WIDTH	UNITS	CASE TYPE	BLADE MATERIAL
D18646	005703	6 ft.	1/4 in.	ft. & in. First foot: inches to 32nds One side: diameter inches to 100ths Other side: blank space before zero	closed	steel







SR18300

SURVEYORS ROPE

Makes an ideal drag chain for rough surveying measurements. Numbers are graduated from the strap handle upward to the end of the rope.

FEATURES

- Tough, flexible and lightweight with graduations printed on both sides
- White with black and red markings.
- Coating: Clear Coat.
- Tensile Strength: 100kg / 200 lbs.

Limited warranty.

MODEL	UPC (052837)	LENGTH	WIDTH	UNITS	BLADE MATERIAL
SR18100	005505	100 ft.	1/4 in.	ft. & in.	fiberglass
SR10100	005604	100 ft.	1/4 in.	ft. & 10ths	fiberglass
SR18200	005512	200 ft.	1/4 in.	ft. & in.	fiberglass
SR10200	005611	200 ft.	1/4 in.	ft. & 10ths	fiberglass
SR18300	005529	300 ft.	1/4 in.	ft. & in.	fiberglass
SR10300	005628	300 ft.	1/4 in.	ft. & 10ths	fiberglass
SR30M	021772	30 m	1/4 in.	metric	fiberglass
SR50M	021789	50 m	1/4 in.	metric	fiberglass
SR100M	021802	100 m	1/4 in.	metric	fiberglass

DEPTH GAUGES

Developed for seismographic measuring, these tough fiberglass tapes are used by a variety of industries to measure depth. Attach any weight to the snap ring and lower to measure depth. The depth gauges are incredibly durable, flexible and lightweight with graduations printed on both sides.

FEATURES

- Numbers are graduated from the weighted end of the tape strap.
- Tough, flexible and lightweight with graduations printed on both sides.
- White with black and red markings.
- Coating: Clear Coat.
- Tensile Strength: 100kg / 200 lbs.

Limited warranty.


MODEL	UPC (052837)	LENGTH	WIDTH	UNITS	BLADE MATERIAL
DG5018	005406	50 ft.	1/4 in.	ft. & in.	fiberglass
DG10018	005413	100 ft.	1/4 in.	ft. & in.	fiberglass
DG20018	005420	200 ft.	1/4 in.	ft. & in.	fiberglass
DG15M	026081	15 m	1/4 in.	m, dm, cm	fiberglass
DG30M	026098	30 m	1/4 in.	m, dm, cm	fiberglass
DG50M	026104	50 m	1/4 in.	m, dm, cm	fiberglass



SPECIALTY MEASURES SPECIALTY MEASURES

KSYS36

SQUARES

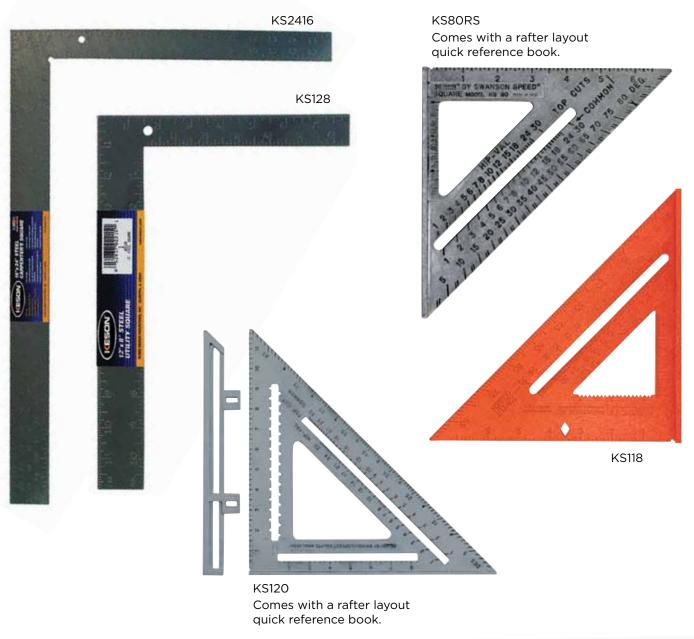



Limited warranty.

Liiiiiica wa	irrairey.		
MODEL	UPC SPECIAL FEATURES (052837)		
KS80RS KS118 KS120 KS128 KS2416 KSYS36	009459 020539 009466 022151 022168 022229	7-inch square, with stair and rafter book 7-inch square, plastic 12-inch square, with stair and rafter book 8-inch x 12-inch, steel 16-inch x 24-inch, steel Aluminum yard stick. English and metric (.910m) with additional English/metric conversion information.	



արան 1 2 3

english

Serimie diminimient		шилиц	шен шер	
1 2 2 3	40005	6 7	8	9 1 1
Antonia di La Landa	and and and and and	tandan tanda		1 10

metric

WOOD RULERS

Keson wood rulers have long been an essential tool for carpenters, mason's, plumbers and all types of tradespeople. They extend to over 6 feet (2m). They enable you to draw straight lines up to these lengths without the use of a chalk line or mason's line. Folds up to 9-1/2 inches.

FEATURES

- Steel springs have a precision lock action for extra strength when extended.
- Cleanly machined edges allow the rule to be snapped together easily and hold it stiff while measuring.
- Weather resistant markings have tough, clear protective coating.

Limited warranty.

MODEL	DEL UPC LENGTH (052837)		UNITS
WR18M	025169	6 1/2 ft.	ft. & in. / metric
WR1018	025404	6 1/2 ft.	ft. & in. / ft. & 10ths







KDT3M

TALLY METERS

Record and count instantly with this precision counter. Keep an accurate count whether it's of traffic counts, livestock counts or

Easy action lever changes count with slight thumb pressure and a single side knob turn resets counter to zero. Features a 4-digit register that records up to 9999.

Keson's high-quality tally meters are built to last.

Limited warranty.

MODEL	ODEL UPC BASE (052837)		NUMBER OF COUNTERS		
TM100	010233	no	1		
TM200	010370	yes	1		
KDT3M	007066	yes	3		
KDT5M	007073	yes	5		
KDT7M	007080	yes	7		

LEVELS



LVLP PROFESSIONAL, ORANGE

- Aluminum alloy reinforced frame.
- Three, fixed, unbreakable, plumb, magnified, fog-proof acrylic vials.
- Guaranteed to 0.5 mm/m in the standard position, and 0.75 mm/m inverted.
- Cushioned end caps to guard against shocks in the job site environment.
- Comfortable, cushioned grips for a firm grasp and steady level placement.

Available in four sizes: 24", 36", 48" and 78".



LVL HH HAND HOLD SERIES

- Lightweight, top-reading, aluminum box beam levels can stand up to any job.
- Solid-set acrylic, barrel-shaped vials enable an accurate level reading, regardless of the horizontal orientation of the level — a full 360° read.
- Shock-absorbing end caps and ribbed-wall design, along with large easy-grip hand holds that provide reliable, professional results every time.

Available in five sizes: 24", 36", 48", 72" and 78".

SPECIALTY LVL3

Professional accuracy line level with an easy-to-read bubble housed in a sturdy aluminum body.

Small profile, magnetic base, lightweight torpedo level. Great for home projects.

TL16 & TL24

These tile levels are cast for strength and durability. The low profile design can be used as a straight edge and screed. The waterproof body is easy to clean and fits under toe kicks and behind fixtures.



LVL_FV PROFESSIONAL, ALUMINUM

Superior strength — profile weight is 890 g/m and no hand holes to compromise integrity.

- Unbreakable magnified acrylic vials. Shock-absorbing end caps. Machined edges.
- Measuring tolerance is .3 mm per 1 meter in standard position. The period at the end of this sentence is .3 mm tall.
- The inverted measuring tolerance is .75 mm per meter.

Available in four sizes: 24", 36", 48" and 78".



LVL IB I-BEAM SERIES

- Extruded aluminum with barrel-shaped vials that enable an accurate level reading, regardless of the horizontal orientation of the level — a full 360° read.
- Shock-absorbing, protective end caps.
- Great for the budget minded.

Available in two sizes: 24" and 48".



LVL9

MAGNETIC V-GROOVE 3-VIAL TORPEDO LEVEL

9 inches, 3-vials, Small profile, magnetic base. lightweight torpedo level. Great for home projects. Cushioned end caps protect your level from abuse even in the toughest environments. Glow-in-the-dark reflector base improves reading in low-light areas.



MAR N Z

CHALK LINE REELS

CHALK

TWINE

PAINT

SPECIALTY MARKING

TAPE

CHALK LINE REELS



GIANT® CHALK LINE REELS

Our GIANT® brand is big — so it can hold a lot of string and a lot of chalk. If you're snapping dozens of lines, or need big bold lines, grab a GIANT® and make your mark.

G3X100

FEATURES

- Ergonomic design to reduce wrist strain.
- Chalk Catcher reduces waste and keeps chalk from ending up on your clothes.
- "Glovable" grip for cold weather.
- Huge Big Mouth™ opening to ease fill-up and no-leak stopper to keep it shut.

G130 / G150

FEATURES

- 130 feet or 150 feet, heavy-duty cord and pull ring.
- Holds over a pound of chalk for fewer refills.
- One-piece steel crank for long life.

G100 / G110 / G140FL

FEATURES

- 100 feet or 110 feet, heavy-duty cord and pull ring.
- Hooks easily onto tool belt and holds almost a pound of chalk.
- One-piece steel crank for long life.
- **G140FL** features 140 feet of thinner line traditionally associated with a small chalk line reel in a GIANT®.
- **G110D** features two chalk lines reels that share a common string and no pull ring. Hold two reels on opposite sides of a concrete slab or roof and chalk up the line by winding from one box to the other.
- *Most reels are available as combos with 3 pounds of Keson Chalk.

Limited warranty.

MODEL	UPC (052837)	HOUSING	HANDLE	CAPACITY	STRING	SPECIAL FEATURES
G3X100	026432	ABS	ABS	12 oz.	100 ft., thick	3x 1 rewind
G100 G100C G1003B G1003R	020089 026418 026241 020508	ABS ABS ABS ABS	metal metal metal metal	15 oz. 15 oz. w/3 lbs. blue chalk w/3 lbs. red chalk	100 ft., thick	Best seller! Cotton string Best seller!
G110 G1103B G1103R	021895 026258 020171	ABS ABS ABS	metal metal metal	12 oz. w/3 lbs. blue chalk w/3 lbs. red chalk	110 ft., thick	
G130 G1303B G1303R	005864 027002 010080	ABS ABS ABS	metal metal metal	27 oz. w/3 lbs. blue chalk w/3 lbs. red chalk	130 ft., thick	Best seller! Best seller!
G140FL	026647	ABS	metal	16 oz.	140 ft., thin	
G150 G150C G1503B G1503R	021901 026777 026211 020188	ABS ABS ABS ABS	metal metal metal metal	24 oz. 24 oz. w/3 lbs. blue chalk w/3 lbs. red chalk	150 ft., thick	Cotton string













STANDARD CHALK LINE REELS

They fit in your hand, tool belt, or tool bag. Thin lines wherever and whenever you need them. Geared rewinds are a time saver. Braided lines are stronger and require fewer replacements. These chalk line reels come with thin multi-material (cotton and polyethylene) lines for pinpoint accuracy and increased strength.

RWM1

METAL, 3X HIGH-SPEED REWIND

Great feel, geared rewind, tear-drop shaped, metal reel.

- Rubber grip, tear-drop shape.
- Heavy-duty metal case with rubber side grips for sure hold.
- Metal handle.

P100

UNIQUE SHAPE AND SPECIAL LINE

A great reel for corner work.

- Holds 100 feet of heavy-duty polycord, braided line for superior strength
- Hook end to allow one person operation.
- Heavy-duty steel crank handle for longer life.

GB1* / GB1NEON*

PLASTIC, 3X HIGH-SPEED REWIND

- High-speed, 3X rewind will re-chalk your line quickly.
- Sturdy case will take the abuse any job site can dish out.
- Clutch lets you pull the string out without knuckle-busting on a whirly handle.
- No-Spill grommet keeps refills clean and easy.

FB2*

A standard, cost effective chalk line reel. This reel has been in our line since the beginning.

- Self-sealing grommet for spill-free refills.
- Great little reel at a great price.
- Doubles as a plumb bob.

K1

The basic metal chalk reel. Solid construction, consistent performance at a great price.

- Compact and super light.
- Doubles as a plumb bob.
- Self-sealing grommet for spill-free refills.

Limited warranty

MODEL	UPC (052837)		HANDLE	CAPACITY	STRING	SPECIAL FEATURES
RWM1 P100 GB1	021543 023486 005802	metal plastic plastic	metal metal plastic	3 oz. 3 oz. 3 oz.	100 ft., thin 100 ft., thin 100 ft., thin	3 x 1 rewind Braided line 3 x 1 rewind, chrome plated
GB1NEON FB2 K1	010684 005819 022656	plastic plastic metal	plastic plastic metal	3 oz. 3 oz. 2 oz.	100 ft., thin 100 ft., thin 100 ft., thin	3 x 1 rewind, Economic option All metal design

CHALK



A LITTLE ABOUT PROCHALK®


ALL MARKING CHALK IS NOT CREATED EQUAL

The color and the amount of the pigment determines the vividness and permanence of the line. The pictures below give a basic idea of how marking chalk works and why Keson chalk is the best marking chalk in the world. It sticks to your line until you decide you want it to stick to something else. Over the years, we've fine tuned our formulas to produce chalk that performs with consistent excellence, batch after batch.



We've engineered a range of colors with three basic variations of intensity. ProChalk for your basic chalk line needs. Glo-Orange and Glo-Lime are highly visible versions of ProChalk that will wear or wash away naturally. ProChalk Plus, for lines that hit and stick for a long, long time; and standard ProChalk Ultimate is chalk dye, almost 100%






PROCHALK® & PROCHALK® GLO STANDARD MARKING CHALKS

ProChalk is formulated to achieve a perfect line every time. Brilliant color tones provide strong, sharp lines. From the brightest pigments in the industry, we produce standard colors plus our unique, fluorescent Glo-Orange and Glo-Lime for improved visibility.

- Standard grade marking chalk.
- Brilliant color.
- 4-5 strikes usual line yield.
- Great flow for easy reel fill-up.



PROCHALK® PLUS PROFESSIONAL MARKING CHALK

There is a delicate balance that needs to be maintained with higher grade chalk: you need enough pigment to slap down a line that's not going anywhere and enough carrier to keep the chalk flowing. ProChalk Plus is formulated to achieve a perfect, lasting line every time.

- Professional grade marking chalk. Water-resistant lines hold your mark.
- 8-10 strikes usual line yield.
- Great flow for easy reel fill-up.

- Brilliant weather-proof color.

PROCHALK® ULTIMATE PROFESSIONAL MARKING DYE

Sometimes called chalk dye, this product lays down a mark that stays. Our red and blue dyes are souped up even more than the ProChalk Plus grades.

- Premium grade marking dye.
- Great flow for easy reel fill-up.
- 12-15 strikes usual line vield. - Brilliant weather-proof color.
- Eliminates the need for chalk line saver in most environments.
- Water-resistant lines hold your mark.

These are concentrated marking products. Lines snapped with ProChalk Plus & Ultimate grades may be visible as long as one year after striking. The colors also may bleed through light-colored paint



PROCHALK® & PROCHALK® GLO

STRIKE ONCE, STRIKE BOLD!

MODEL	UPC (052837)	COLOR	WEIGHT	SPECIAL FEATURES
4B 4R	006021	blue red	4 oz. 4 oz.	
4W	006014	white	4 oz.	
4Y	006038	yellow	4 oz.	
8BLACK	25954	black	8 oz.	best seller! best seller! glo-color
8B	006120	blue	8 oz.	
8R	006106	red	8 oz.	
8W	006113	white	8 oz.	
8Y	006137	yellow	8 oz.	
8GL	006427	glo-lime	8 oz.	
8GO	006403	glo-orange	8 oz.	
12B	006226	blue	12 oz.	
12R	006205	red	12 oz.	
12W	006212	white	12 oz.	
12Y	006236	yellow	12 oz.	

MODEL	UPC (052837)	COLOR	WEIGHT	SPECIAL FEATURES
102B	239120	blue	2 lbs.	
102R	239290	red	2 lbs.	
102GO	239360	glo-orange	2 lbs.	glo color!
103B	020584	blue	3 lbs.	best seller!
103BLACK	026203	black	3 lbs.	
103R	020577	red	3 lbs.	best seller!
103W	026180	white	3 lbs.	
103GO	020591	glo-orange	3 lbs.	glo color!
105B	006328	blue	5 lbs.	best seller!
105BLACK	206210	black	5 lbs.	
105R	006304	red	5 lbs.	best seller!
105W	006311	white	5 lbs.	
105Y	006335	yellow	5 lbs.	
105GL	020188	glo-lime	5 lbs.	glo color!
105GO	006410	glo-orange	5 lbs.	glo color!
125B	006526	blue	25 lbs.	
125R	006502	red	25 lbs.	
125W	006519	white	25 lbs.	best seller!
125Y	006533	yellow	25 lbs.	
125GO	006540	glo-orange	25 lbs.	glo color!
148B	006625	blue	48 lbs.	
148R	006601	red	48 lbs.	
148W	006618	white	48 lbs.	best seller!
148Y	006632	yellow	48 lbs.	
148GO	006649	glo-orange	48 lbs.	glo color!



PROCHALK® PLUS

CONCENTRATED COLOR

MODEL	UPC (052837)	COLOR	WEIGHT	SPECIAL FEATURES
PM8BLACK	021482	black	8 oz.	
PM8BLUE	021505	blue	8 oz.	
PM8RED	021529	red	8 oz.	
PM103BLACK	O21499	black	3 lbs.	
PM103BLUE	O21512	blue	3 lbs.	
PM103RED	O21536	red	3 lbs.	

PROCHALK® ULTIMATE

SUPER CONCENTRATED COLOR

MODEL	UPC (052837)	COLOR	WEIGHT	SPECIAL FEATURES
5BD	025916	blue	5 oz.	chalk-dye
5RD	026838	red	5 oz.	chalk-dye
102BD	025909	blue	2 lbs.	chalk-dye
102RD	026845	red	2 lbs.	chalk-dye
103BD	026036	blue	3 lbs.	chalk-dye
103RD	026856	red	3 lbs.	chalk-dye

PAINT

BRAIDED MASON TWINE

Braided twine doesn't come apart even when reused. It is perfect for large jobs and everyday use. You can also nick it with a trowel and it won't unwind. Another benefit is that braided twine does not spin as much as a twisted line, bringing plumb bobs to rest sooner.

FEATURES

- 18-gauge line with an approximate tensile strength of 155 pounds.
- 250 feet = 1/4 pound, 500 feet = 1/2 pound, 1000 feet = 1 pound.

MODEL	UPC (052837)	COLOR	LENGTH
BWB250	020478	black & white	250 ft.
BWB500	020485	black & white	500 ft.
BWB1000	020492	black & white	1000 ft.
GB250	008278	green	250 ft.
GB500	008285	green	500 ft.
GB1000	008292	green	1000 ft.
OB250	008216	orange	250 ft.
OB500	008223	orange	500 ft.
OB1000	008230	orange	1000 ft.



MODEL	UPC (052837)	COLOR	LENGTH
PB250 PB500 PB1000 WB250 WB500 WB1000 YB250 YB500 YB1000	008247 008254 008261 108152 108169 108176 108183 008193 008209	pink pink pink white white yellow yellow yellow	250 ft. 500 ft. 1000 ft. 250 ft. 500 ft. 1000 ft. 250 ft. 500 ft. 1000 ft.

TWISTED MASON TWINE

Twisted line is a fine choice for mason line and other marking needs. Choosing twisted line is often an economical choice. You get 10% more line per spool.

FEATURES

- 18-gauge line with an approximate tensile strength of 160 pounds.
- 275 feet = 1/4 pound, 545 feet = 1/2 pound, 1090 feet = 1 pound.

	TWISTED MASON TWINE
00	TWISTED MASON TWINE
	TWISTED MASON TWINE

MODEL	UPC (052837)	COLOR	LENGTH
GT275	108121	green	275 ft.
GT545	008131	green	545 ft.
GT1090	108145	green	1090 ft.
OT275	008063	orange	275 ft.
OT545	008070	orange	545 ft.
OT1090	008087	orange	1090 ft.
PT275	008094	pink	275 ft.
PT545	108107	pink	545 ft.
PT1090	008117	pink	1090 ft.

MODEL	UPC (052837)	COLOR	LENGTH
WT275 WT545 WT1090 YT275 YT545 YT1090	008001 008018 008025 008032 008049 008056	white white white yellow yellow yellow	275 ft. 545 ft. 1090 ft. 275 ft. 545 ft. 1090 ft.

ULTRA-MARK® PAINT

Formulated to generate superior brilliance for long-range visibility. Before marking a dark surface, spray a coat of white to enhance the brightness of the paint. The Ultra-Mark spray paint contains no fluorocarbons, making it non-toxic after drying. Top discharge valve for ease of use. All Keson paint is water based.

Use with PA14, PA35, RRPA18 and RRPA182 applicators (see page 15).

HOW MUCH IS ENOUGH?

A 16-ounce can provides approx. 250 feet of a 4-inch wide line. A 20-ounce can covers approx. 300 feet with the same 4-inch line.

How much Paint is in the can? Compare the Net Weights.

Federal law requires that the cans clearly label the net weight of paint.

20 ounce cans =

Keson: 17 oz. of paint + 3 oz. of propellant (for 16 oz. cans it's 14:2) **Most Competitors:** 15 - 16 oz. of paint + 4 or 5 oz. of propellant (for their 16 oz. cans it's 13:3)

100% of Keson paint is made in the USA.

Shelf life of a can of paint is approximately 1 year.



KESON	KESON
FLUORESCENT SPRAY MARKER	FLUORESCENT SPRAY MARKER
BUE	PHEO
The Day of the Control of the Contro	The first state of

MODEL UPC (052837	WEIGHT	COLOR
SP16B 00905: SP16G 00904i SP16R 00902: SP16RO 009015: SP16W 009176 SP16Y 00903: TY16 00906i	16 oz. 16 oz. 16 oz. 16 oz. 16 oz. 16 oz.	blue green red red-orange white yellow traffic yellow

MODEL	UPC (052837)	WEIGHT	COLOR
SP20B SP20BK SP20G SP20GO SP20GP SP20R SP20RO SP20W SP20Y	009145 021970 009169 021963 009121 009138 009114 021956 009152	20 oz. 20 oz. 20 oz. 20 oz. 20 oz. 20 oz. 20 oz. 20 oz. 20 oz. 20 oz.	blue black green glo-orange glo-pink red red orange white yellow

20 oz.

MODEL	UPC (052837)	WEIGHT	COLOR
CS16	009077	16 oz.	clear
CS20	020553	20 oz.	clear

CHALK LINE SAVER CLEAR SPRAY WITH INVERTED TIP

WHY CHALK LINE SAVER?

Clear spray protects chalk line from wind, rain and shuffling feet. Save hours of rework by protecting your layout!

SPECIALTY MARKING

PAINT CRAYONS, VALVE PAINT MARKERS (PAINT PENS) & MARKERS

WHY PAINT CRAYONS?

- Marks through oil and water.
- Lead-free, non-toxic.

WHY VALVE PAINT **MARKERS (aka PAINT** PENS)?

- Marks on all surfaces: metal, wood, glass, plastic, rubber, cardboard and paper.



resistant, fast drying.

- WHY GIANT MARKERS? - Water resistant, fade resistant, high intensity ink.
- Mark large on cardboard, ceramic, wood, metal and



MODEL	UPC (052837)	COLOR	ТҮРЕ
PCB PCR PCW PCY VPMB VPMR VPMW VPMY TPB TPBK TPR GMB GMBK GMR	023622 023639 023615 023608 023660 023677 023684 023653 023646 023691 023707 023714 023721 023738 023745	blue red white yellow blue black red white yellow blue black red blue black red	paint crayon paint crayon paint crayon paint crayon paint crayon valve paint marker/paint pen point marker point marker giant chisel marker giant chisel marker giant chisel marker

HARD LUMBER CRAYONS

Ideal for warmer climates, and for marking on dry and wet wood, paper, cartons, stone, concrete, tiles, and plastic. Weather and wear resistant.



MODEL	UPC (052837)	COLOR
LCBlack	009237	black
LCBlue	009220	blue
LCGreen	021420	green
LCGPink	021314	pink
LCRed	009206	red
LCWhite	009213	white
LCYellow	009251	vellow

SOFT LUMBER CRAYONS

Ideal for cooler climates, and for marking on almost any surface, especially tire, glass, bricks, rubber, ceramics, dry and wet wood, paper, cartons, stone, concrete, tiles and plastic. Weather and wear resistant.



MODEL	UPC (052837)	COLOR
BSCBlack	010097	black
BSCBlue	010103	blue
BSCRed	010110	red
BSCYellow	010127	yellow

LUMBER CRAYON HOLDERS

Keep your crayons from breaking.





MODEL	UPC (052837)	SPECIAL FEATURES
LCHolder	008100	Aluminum
LCH100	008179	Aluminum, carded with crayon
PS100	008124	Wood
DS100C	007028	Wood carded

MODEL	UPC (052837)	SPECIAL FEATURES
LP72	007905	Natural wood, black lead
LP72R	020560	Natural wood, red lead
LP72WHITE	007905	White wood, black lead

CARPENTER PENCIL SHARPENER

Gives you a clean, solid square tip instantly!











MODEL	UPC (052837)	SPECIAL FEATURES
CP2	022663	Blister of 1 CP2
CP26	022731	Blister of 1 CP2 and 6 pencils
CP2MER	022670	Counter display of 20 CP2s



TMP

HMBULKB HMBULKRED



RCYBULK

CHINA MARKERS

MODEL	UPC (052837)	COLOR	SPECIAL FEATURES	
CMB	023790	blue	Carded 2-pk — 12 card standard pack	
CMBK	023806	black	Carded 2-pk — 12 card standard pack	
CMR	023813	red	Carded 2-pk — 12 card standard pack	
CMW	023783	white	Carded 2-pk — 12 card standard pack	
CMY	023776	yellow	Carded 2-pk — 12 card standard pack	

Bulk packs are available

TRIANGLE MARKING PENS

WHY TRIANGLE PENS?

- Water-resistant high intensity wax lead
- Perfect for marking different thicknesses
- Always have a sharp tip!

MODEL	UPC (052837)	ТҮРЕ	
TMP	024803	holder with 4 color inserts: yellow, red, black, white	
TMPB TMPG TMPR TMPW TMPY	024810 025619 024827 024834 024841	4 black refills 4 graphite refills 4 red refills 4 white refills 4 yellow refills	

HALF-MOON MARKING CHALK

Used on rail cars, concrete, asphalt, wood and other surfaces, this chalk is ideal for layout work and marking for estimating.

MODEL	UPC (052837)	COLOR	SPECIAL FEATURES
HMBULKB	024209	blue	Half-moon
HMBULKRED	024216	red	Half-moon
HMBULKW	024223	white	Half-moon

SOAPSTONE

Keson soapstone is primarily used by welders for metal marking or by plumbers for pipe marking.

Use Keson Chalk Line Saver (p. 37) to make the mark last.

MODEL	UPC (052837)	COLOR	SPECIAL FEATURES	
SS144BULK	024230	white	Soapstone	
SH500	024247	NA	Soapstone holder	
SS3H	023592	white	3 pieces of soapstone with holder	

RAILROAD CHALK

MODEL	UPC (052837)	COLOR	
RCBBULK	024179	Blue	
RCWBULK	024186	White	
RCYBULK	024193	Yellow	
CH400	026456	Railroad Chalk holder	

FLAGGING TAPE

1-3/16" WIDE

1" WIDE

MODEL	UPC (052837)	LENGTH	COLOR
FTGL FTGO FTGP FTGR FTB FTG FTO FTP FTR FTW FTY	006823 006809 006830 006816 006731 010646 006717 010653 006700 006748	150 ft. 150 ft. 150 ft. 150 ft. 300 ft. 300 ft. 300 ft. 300 ft. 300 ft. 300 ft.	glo-lime glo-orange glo-pink glo-red blue green orange pink red white yellow

MODEL	UPC (052837)	LENGTH	COLOR
FTOIGL FTOIGO FTOIGP FTOIGR FTOIB FTOIO FTOIO FTOIO FTOIP FTOIR FTOIW FTOIY	024285 024254 024261 024278 024315 024346 024322 024353 024292 024308 024339	150 ft. 150 ft. 150 ft. 150 ft. 300 ft. 300 ft. 300 ft. 300 ft. 300 ft. 300 ft. 300 ft.	glo-lime glo-orange glo-pink glo-red blue green orange pink red white yellow



STANDARD

Bulk Flagging Tape also available

BARRICADE TAPE PROFESSIONAL - 1" WIDE

High-strength, high-visibility barricade tape is manufactured with a superior quality, virgin, yellow opaque poly-material. It is printed with ultra-bond, jet black ink that penetrates the plastic surface. It is scratch-proof and weather-resistant.



MODEL	UPC (052837)		LENGTH	LEGEND
BT300	007660	yellow	300 ft.	caution, caution, caution
BT310	007721	yellow	300 ft.	caution, caution (economy)
BT304	007707	yellow	300 ft.	caution: open trench
BT210	007486	yellow	200 ft.	caution, caution (economy) caution: open trench caution: cuidado
BT204	007400	yellow	200 ft.	
BT211	007493	yellow	200 ft.	

FOIL UNDERGROUND DETECTABLE TAPE

PERMANENT MESSAGE

Color band and black ink imprint are encapsulated in the tape. Ink does not extend to edges, giving maximum bond between plies.

ALUMINUM CORE

A solid detectable core makes it the choice for locating nonmetalic lines.

DURABLE

Constructed with prime resin, it's durable. Tolerates -94° F to 200° F. temperature range.

ENDORSED


Meets OSHA regulation 1926-956 (C) (I) covering location of underground utility lines.



MODEL	UPC (052837)	COLOR	LEGEND: BURIED	WIDTH
FDT2BEL	022939	red	electric line	2 in.
FDT2BFOL	023080	orange	fiber optic line	2 in.
FDT2BGL	022991	yellow	gas line	2 in.
FDT2BSL	023110	green	sewer line	2 in.
FDT2BWL	023059	blue	water line	2 in.
FDT3BCL	023035	yellow	communications line	3 in.
FDT3BEL	022946	red	electric line	3 in.
FDT3BFOL	023080	orange	fiber optic line	3 in.
FDT3BGL	023004	yellow	gas line	3 in.
FDT3BSL	023127	green	sewer line	3 in.
FDT3BWL	023066	blue	water line	3 in.
FDT6BEL	022953	red	electric line	6 in.
FDT6BSL	023134	green	sewer line	6 in.
FDT6BWL	023073	blue	water line	6 in.

SURVEYOR STAKE FLAGS

2-1/2" x 3-1/2" FLAGS ON A 21" STAKE



MODEL	UPC (052837)	COLOR
STK21B	010288	blue
STK21G	010301	green
STK21GL	010264	glo-lime
STK21GO	010240	glo-orange
STK21GP	010271	glo-pink
STK21GR	010257	glo-red
STK21W	006977	white
STK21Y	010295	yellow

.35

.33

INDEX

102B32
102BD32
102GO32
102R32
102RD32
103B32
103BD32
103BLACK32
103GO32
103R32
103RD32
103W32
105B32
105BLACK32
105GL32
105GO32
105R32
105W32
105Y32
125B32
125GO32
125R32
125W32
125Y32
12B32
12R32
12W32
12Y32
148B32
148GO32
148R32
148W32
148Y32
4B32
4R32
4W32
4Y32
5BD32
5RD32
8B32
8BLACK32
8GL32
8GO32
8R32
8W32
8Y32
DCCDI ACI/
BSCBLACK35
BSCBLUE35
BSCRED35
BSCYELLOW35
BT1200E37
BT120137
BT121037
BT121137

BT1213 37
BT121437
BT1215 37
BT1218 37
BT1218RED37
BT121937
BT122137
BT122237
BT122837
BT162937
BT20437
BT21037
BT21137
BT30037
BT30437
BT31037
BWB100033
BWB25033
BWB50033
CH40036
CP235
CP2635
CP2MER35
CMB36
CMBK36 CMR36
CMW36
CMY36
CS1634
CS2034
D18646
DG1001824
DG15M24
DG2001824
DG30M24
DG501824
DG50M24
FB230
FD2BGL37
FD3BEL37
FDT2BEL37
FDT2BFOL 37
FDT2BSL37
FDT2BWL37
FDT3BCL37
FDT3BFOL37
FDT3BGL37
FDT3BSL37
FDT3BWL37
FDT6BEL37
FDT6BSL37
FDT6BWL37
FLT1016518
FLT1020018

FLT181020018
FLT1816518
FLT1820018
FLT18M16518
FLT18M20018
FLT50MM18
FT01B37
FT01G37
FT01GL37
FT01GO37
FT01GP37
FT01GR37
FT01037
FT01P37
FT01R37
FT01W37
FT01Y37
FTB37
FTG37
FTGL37
FTGO37
FTGP37
FTGR37
FTO37
FTP37
FTR37
FTW37
FTY37
G10029
G1003B29
G1003R29
G100C29
G11029
G1103B29
G1103R29
G13029
G1303B29
G1303R29
G140FL29
G15029
G1503B29
G1503R29
G150C29
G3X10029
GB130
GB1NEON30
GB100033
GB25033
GB50033
GMB35
GMBK35
GMR35
GT109033
GT109033

GT545	33
HMBULKB	36
HMBULKRED	36
HMBULKW	
K1	30
KDT3M	26
KDT5M	
KDT7M	
KS118	
KS120	
KS128	
KS2416	
KS80RS	
KSYS36	
LCBLACK	
LCBLUE	
LCGPINK	
LCGREEN	
LCH100	
LCHolder	
LCRED	
LCWHITE	33
LCYELLOW	33
LP72	
LP72 LP72R	
LP72WHITE	
LVL_FV LVL HH	
LVL_HH LVL IB	
-	
LVL3	
LVL8	
LVL9	
LVLP	
MC10100	
MC10165	
MC1050	
MC10M100	
MC10M165	20
MC10M50	
MC18100	
MC1810100	
MC181050	
MC18165	20
MC1850	20
MC18M100	20
MC18M50	20
MP201	
MP301	
MP301DM	
MP301M	3, 6
MP315M	
MP401	3, 6
MP401E	3, 5
MDAO1D	7 6

MP4153, 6	OTR1850
NR1010015	OTR18M1
NR10100E15	OTR18M1
NR10100H15	OTR18M2
NR1016515	OTRIBM3
NR10165E15	OTRIBMS
NR10165H15	
	OTR30M
NR1020015	OTR30M
NR10200E15	OTR50M
NR10200H15	OTR50M
NR1810015	OTRS1010
NR1816515	OTRS102
NR1820015	OTRS103
NR30M15	OTRS1810
NR30ME15	OTRS182
NR30MH15	OTRS183
NR50M15	OTRS1810
NR50ME15	OTRS1810
NR50MH15	P100
NR60M15	PB1000
NR60ME15	PB250
NR60MH15	PB500
NRS100M14	PCB
NRS10100H14	PCR
NRS10200H14	PCW
NRS10300H14	PCY
NRS1810014	PG1016
NRS1820014	PG1025
NRS1830014	PG10M25
NRS30M14	PG181025
NRS50M14	PG181025
OB100033	PG1816
OB25033	PG1825
OB50033	PG1825M
OT109033	PG1825R
OT27533	PG1825S
OT54533	PG1825W
OTR100M19	PG1830
OTR100MM19	PG1830R
	PG1835
OTR1010019	
OTR1016519	PG1835R
OTR1020019	PG18M25
OTR1030019	PG18M25
OTR105019	PG25
OTR10M10019	PG2510
OTR10M16519	PG7.5M
OTR10M20019	PGPRO18
OTR10M30019	PGPRO18
OTR10M5019	PM103BL
OTR15M19	PM103BL
OTR1810019	PM103RE
OTR181010019	PM8BLA
OTR181016519	PM8BLUI
OTR181020019	PM8RED
OTR181030019	PR2M
OTR181050019	PR2M PR610
OTR1816519	PR618
OTR1820019	PS100
OTR1830019	PS100C

OTD1050 1	^
OTR18501	
OTR18M1001	
OTR18M1651	
OTR18M2001	9
OTR18M3001	9
OTR18M501	
OTR30M1	
OTR30MM1	
OTR50M1	
OTR50MM1	
OTRS10100H1	
OTRS10200H1	8
OTRS10300H1	8
OTRS181001	
OTRS182001	
OTRS183001	
OTRS1810200E1	
OTRS1810300E1	
P1003	
PB10003	3
PB2503	3
PB5003	3
PCB3	
PCR3	
PCW3	
PCY3	
PG10162	
PG10252	
PG10M252	
PG1810252	21
PG181025SS2	21
PG18162	
PG18252	
PG1825MAG2	
PG1825RG2	
PG1825SS2	
PG1825WIDE2	
PG18302	
PG1830RG2	2
PG18352	21
PG1835RG2	2
PG18M252	
PG18M25RG2	
PG252	
PG25102	
PG7.5M2	
PGPRO18252	
PGPRO18302	
PM103BLACK3	
PM103BLUE3	2
PM103RED3	2
PM8BLACK3	2
PM8BLUE3	2
PM8RED3	
PR2M2	
PR6102	
PR6182	
PS1003	5

PT109033	SR18200
PT27533	SR18300
	SR30M
PT54533	
RCBBULK36	SR50M
RCWBULK36	SS144BUL
RCYBULK36	SS3H
RR1024, 11	ST10010
RR10M4, 11	ST10018
RR1104, 11	ST101003
RR1124, 11	ST10503X
RR1824, 11	ST181003)
RR30 4, 9	ST181003/
RR30109	ST18503X
RR30M9	ST1850Y
RR3104. 10	ST5010
RR318N4, 10	ST5018
RR3M4, 10	STK21B
RR404, 9	STK21G
RR41010	STK21GL
RR4184, 10	STK21GO.
RRPA184, 12	STK21GP
RRPA1824, 12	STK21GR.
RRT123, 8	STK21W
	STK21W
RRT63, 8	
RWM130	TL16
SH50036	TL24
SNR100M14	TM100
SNR100ME14	TM200
SNR100MH14	TMP
SNR1010014	TMPB
SNR10100H14	TMPG
SNR1020014	TMPR
SNR10200H14	TMPW
SNR1030014	TMPY
SNR10300E14	TPB
SNR10300H14	TPBK
SNR1810014	TRP
SNR1820014	TY16
SNR1830014	VPMB
SP16B34	VPMBK
SP16G34	VPMR
SP16R34	VPMW
SP16RO34	VPMY
SP16W34	WB1000
SP16Y34	WB250
SP20B34	WB500
SP20BK34	WR1018
SP20G34	WR18M
SP20G034	
	WT1090
SP20GP34	WT275
SP20R34	WT545
SP20RO34	YB1000
SP20W34	YB250
SP20Y34	YB500
SR100M24	YT1090
SR1010024	YT275
SR1020024	YT545
SR1030024	

SR18100...

..35



810 COMMERCE STREET AURORA, ILLINOIS 60504