

Catalog Number
Notes
Type

FEATURES & SPECIFICATIONS

INTENDED USE

Provides general illumination in residential and light commercial applications. Ideal for use in workshops, utility rooms and garages

CONSTRUCTION

The spotlight's 5-1/2" white reflector provides a wide spread illumination. Fully assembled, ready-to-install. Comes with 5' power cord - no wiring required. Supplied with (2) "S" hooks and (2) 9-1/2" chains for no-hassle installation.

Minimum Starting Temperature:
 1233 CW – 0 degrees (-18 degrees C)
 1233 RE – 0 degrees (-18 degrees C)
 1233 – 60 degrees (20 degrees C)

OPTICS

Utilizes (2) 40W, 34W or 25W linear T12 fluorescent lamps for energy efficiency. (not included)

ELECTRICAL

Standard with low-power factor magnetic ballast (120 volt, 60Hz).

LISTINGS

CUL listed to US and Canadian safety standards and suitable for damp locations.

WARRANTY

2-year limited warranty. Complete warranty terms located at www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

NOTE: Actual performance may differ as a result of end-user environment and application. Specifications subject to change without notice.

Indoor General Purpose


Shop Light Utility

Linear T12 Fluorescent



Dimensions

All dimensions are inches (centimeters)

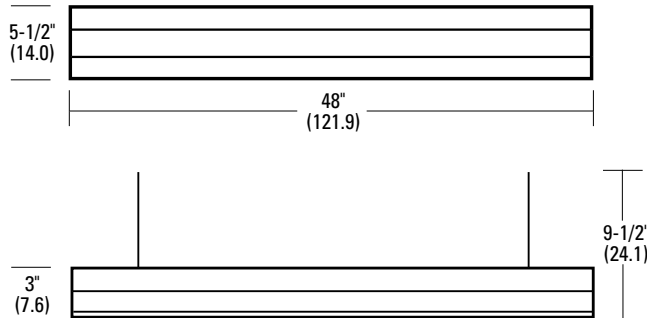

ORDERING INFORMATION

For shortest lead times, configure products using **bolded options**.

Example: 1233

1233	
Series ^{1,2,3,4}	Ballast/voltage
1233 (2) 40W, 34W or 25W linear T12 fluorescent lamps required (2) T8 32W fluorescent lamps for RE and CW 232	(blank) 120V magnetic ballast (standard) 1233 RE Residential Electronic Ballast 1233 CW 232 Electronic Cold Weather Ballast Other voltage and ballast types (consult factory)

Notes

- Lamps not included.
- Use with non-dimmable switches only.
- Not designed to be mounted flush to the ceiling.
- Must be plugged into three pronged outlets to avoid electrical shock and to ensure reliable starting.