



NUMBER ONE IN TOWING

**TOWING &  
TRAILERING**

PRODUCT CATALOG



REESE®, a Cequent brand, is the market leader in automotive and recreational product solutions, engineered and designed to meet the demands for work as well as active lifestyles.

Since 1952, REESE® has been a leader in the trailer towing industry with proven designs that exceed the industry standards; the “Brand of Choice” when performance is the expectation.

Our solutions include a wide variety of high-quality towing, trailering, cargo management and related accessory products for agricultural, automotive, construction, industrial, marine, military, RV, trailer and utility applications.

The REESE® family of sub-brands includes:



**NUMBER ONE IN TOWING**  
A complete line of quality product solutions for light- to heavy-duty towing and trailering systems.



**FOR EVERY ADVENTURE**  
Rooftop and hitch-mounted cargo carriers and interior organizers to safely and securely transport your gear to their destination.



**PERFORMANCE DRIVEN**  
Innovative, solution driven products for securing, hauling and protecting all your consumer and professional essentials.



**PERFORMANCE ON AND OFF THE ROAD**  
Providing enthusiasts with innovative products to match their passion for performance both on- and off-road.

## REESE® TOWPOWER



**RECEIVER HITCHES ..... 6-20**

Multi-Fit Receiver Hitches ..... 6-9	Fifth Wheel Hitches ..... 17
Custom-Fit Receiver Hitches ..... 10-14	Front Mounted Hitch Receivers ..... 18
Special Order Hitches ..... 15	Receiver Adapters & Tubes ..... 19
Goosenecks ..... 15-16	



**BALL MOUNTS & HITCH BALLS ..... 20-42**

Weather Resistant Finishes ..... 20-21	Dual & Triple Ball Mounts ..... 34
Carbon Forged Ball Mounts ..... 22-23	Rotating Tri-Ball ..... 35
InterLock® Ball Mounts ..... 24-25	Towing Starter Kits ..... 36
Standard Ball Mounts ..... 26-27	Towing Kits -InterLock® ..... 37
Heavy Duty, Class V Ball Mounts ..... 28-29	Pintle Hooks & Accessories ..... 38-39
Forged Ball Mounts ..... 30	Receiver Mount Pintles, Tow Hook
Adjustable Ball Mount ..... 30	Tow Eye, & Tow Ring ..... 40-41
InterLock® Hitch Balls ..... 31	Clevis Mount ..... 41
Standard Hitch Balls ..... 32	Ball/Hook Mounts ..... 42
Interchangeable Hitch Ball Systems ..... 33	



**SECURITY ..... 43-53**

Reese Professional Locks ..... 43	Bent Pin Lock ..... 49
Easy Access Locks ..... 44-45	Cable Locks ..... 50
Elite Receiver Locks ..... 45	Coupler Locks ..... 51
Spare Tire Carriers ..... 45	Safety Chains ..... 52
Barrel Style Receiver Locks ..... 46	Towing Safety Cables ..... 52
Receiver Pins ..... 47-48	Tow Hook ..... 52
Ball Mount Bar Locks ..... 49	Adjustable Tow Bar ..... 53



**COUPLERS, JACKS & WINCHES ..... 54-69**

Fas-Lok® Class I, II, III Couplers ..... 54	Top Wind Jacks ..... 62
Key-Lok™ Couplers ..... 55	Powered Jack ..... 62
Dual-Fit™ Couplers ..... 55	Reese Power Sports Marine ..... 63-65
Bull Dog Couplers ..... 56-57	Single Speed Winches ..... 66-67
Bull Dog Jacks ..... 58-60	Two Speed Winches ..... 68
Swing Away Jacks ..... 61	Electric Winch ..... 69



**TOWING ACCESSORIES ..... 70-81**

Vehicle Recovery ..... 70	Single Dose Hitch Ball Lubricant ..... 77
ATV Accessories ..... 71	Wheel Bearing Protectors & Kits ..... 77
Dual Hitch Extension ..... 72	Step Bumper Receiver ..... 77
Hitch Steps ..... 73	Towing Mirrors ..... 78
Hitch Covers ..... 74-75	SoloHitch™ ..... 78
Dock Chock ..... 76	Chain Hoists ..... 79
Wheel Chocks ..... 76	Farm Jacks ..... 80
Hitch Ball Wrench ..... 76	Cable Pullers ..... 81
Hitch Ball Bushings ..... 76	



# TESTED TOUGH!



THE #1 OEM SUPPLIER TO:




**1 1/4 in**  
RECEIVER  
OPENING

**Class I & II**  
Light to Medium Duty  
2,000 to 3,500 lb  
Gross Towing Capacity



**2 in**  
RECEIVER  
OPENING

**Class III & IV**  
Heavy Duty  
5,000 to 8,000 lb  
Gross Towing Capacity

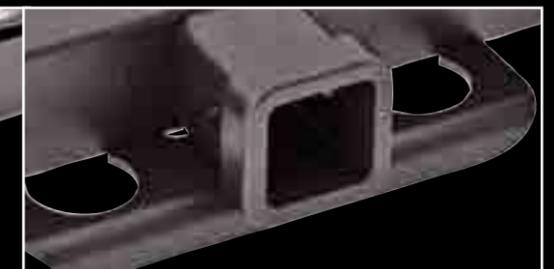

**2 in**  
RECEIVER  
OPENING

**2 1/2 in**  
RECEIVER  
OPENING

**Class V**  
Extra Heavy Duty  
Up to 18,000 lb  
Gross Towing Capacity

**COLOR CODE GUIDE** - Look for Reese Towpower's exclusive color code system to find the right Ball Mount, Hitch Ball, Coupler and other accessories for your new hitch.

**WATCH  
HOW-TO  
VIDEOS**

Each Reese® Towpower Hitch is American engineered & "Tested Tough" to deliver the absolute highest quality Trailer Hitch available anywhere!

Custom built according to manufacturer vehicle weight specifications and model year to ensure a perfect fit and top towing performance!



1 1/4 in RECEIVER OPENING

MULTI-FIT HITCHES

MULTI-FIT HITCHES



METAL SHIELD®  
RESISTS RUST & CORROSION

[Click Here to Go to Our Application Guide](#)

		COMPACT CARS	MID-SIZE CARS	FULL-SIZE CARS, MINI-VANS & TRUCKS	FULL-SIZE VANS, TRUCKS, SUVs
<b>CLASS I</b>	<b>LIGHT DUTY</b> WC GTW – Up to 2,000 lb WC TW – Up to 200 lb				
<b>CLASS II</b>	<b>MEDIUM DUTY</b> WC GTW – Up to 3,500 lb WC TW – Up to 350 lb	—			
<b>CLASS III</b>	<b>HEAVY DUTY</b> WC GTW – Up to 5,000 lb WC TW – Up to 500 lb	—	—		
<b>CLASS IV</b>	<b>HEAVY DUTY</b> WC GTW – Up to 8,000 lb WD GTW – Up to 12,000 lb	—	—		
<b>CLASS V</b>	<b>EXTRA HEAVY DUTY 2-in Square Receiver</b> WC GTW – Up to 15,000 lb WD GTW – Up to 16,000 lb	—	—		
	<b>EXTRA HEAVY DUTY 2 1/2-in Square Receiver</b> WC GTW – Up to 18,000 lb WD GTW – Up to 18,000 lb	—	—		



**CLASS II  
MULTI-FIT RECEIVER HITCH**

- 1-1/4-in Square Receiver Tube Opening
- Passenger Car, SUV, Van & Light Truck Applications
- Hitch Box Cover Included
- 3500 lb** Maximum Gross Trailer Weight
- 350 lb** Maximum Tongue Weight
- 88001**



2 in RECEIVER OPENING

MULTI-FIT HITCHES

MULTI-FIT HITCHES



METAL SHIELD®  
RESISTS RUST & CORROSION



**CLASS III  
MULTI-FIT RECEIVER HITCH**

2-in Square Receiver Tube Opening

- Passenger Car, SUV, Van & Light Truck Applications

**5000 lb** Maximum Gross Trailer Weight  
**500 lb** Maximum Tongue Weight  
**37041**



**CLASS III/IV  
MULTI-FIT RECEIVER HITCH**

2-in Square Receiver Tube Opening

- Pickup Truck Applications

**5000 lb** Maximum Gross Trailer Weight  
**500 lb** Maximum Tongue Weight  
**37096**



**CLASS III/IV  
MULTI-FIT RECEIVER HITCH**

2-in Square Receiver Tube Opening

- Passenger Car, SUV, Van & Light Truck Applications

**5000 lb** Maximum Gross Trailer Weight  
**500 lb** Maximum Tongue Weight  
**37042**



**CLASS IV  
MULTI-FIT RECEIVER HITCH**

2-in Square Receiver Tube Opening

- Passenger Car, SUV, Van & Light Truck Applications

**7000 lb** Maximum Gross Trailer Weight  
 12000 lb with Weight Distribution  
**700 lb** Maximum Tongue Weight  
 1200 lb with Weight Distribution  
**37094**

1 1/4 in  
RECEIVER  
OPENING

CLASS I CUSTOM-FIT HITCHES

[Click Here to Go to Our Application Guide](#)

Designed for a Perfect Fit and a Great Look! Many *NO DRILL* Applications



**CLASS I  
CUSTOM-FIT  
INSTA-HITCH**



- 1-1/4-in Square Receiver Tube Opening
- Economical Class I Receiver Tube Hitch
- Attaches to Vehicle Frame and/or Bumper
- Resists Rust and Corrosion
- 2000 lb** Maximum Gross Trailer Weight
- 200 lb** Maximum Tongue Weight
- 77 SERIES**



**CLASS I  
CUSTOM-FIT INSTA-HITCH**

- 1-1/4-in Square Receiver Tube Opening
- Economical Class I Receiver Tube Hitch
- Attaches To Vehicle Frame and/or Bumper
- Resists Rust and Corrosion
- 2000 lb** Maximum Gross Trailer Weight
- 200 lb** Maximum Tongue Weight
- 51 & 97 SERIES**

CLASS II CUSTOM-FIT HITCHES

1 1/4 in  
RECEIVER  
OPENING



All Hitches Meet or Exceed V5, VS, CSA and SAE J684 Standards

**CLASS II  
CUSTOM-FIT  
INSTA-HITCH**



- 1-1/4-in Square Receiver Tube Opening
- Economical Class I Receiver Tube Hitch
- Attaches To Vehicle Frame and/or Bumper
- Resists Rust and Corrosion
- 3500 lb** Maximum Gross Trailer Weight
- 350 lb** Maximum Tongue Weight
- 06 SERIES**



**CLASS II  
CUSTOM-FIT INSTA-HITCH**

- 1-1/4-in Square Receiver Tube Opening
- Economical Class I Receiver Tube Hitch
- Attaches to Vehicle Frame and/or Bumper
- Resists Rust and Corrosion
- 3500 lb** Maximum Gross Trailer Weight
- 350 lb** Maximum Tongue Weight
- 51 & 97 SERIES**



Click Here to Go to Our Application Guide



OEM Quality Black Powder Coat over E-Coat Finish for TWO Layers of Protection



**CLASS III-IV CUSTOM-FIT HITCH** TESTED TOUGH

- 2-in Square Receiver Tube Opening
  - Round Tubes Available on Some Models
  - Ball Mount, Pin and Clip Sold Separately
  - Attaches to Vehicle Frame and/or Bumper
  - Includes Distinctive Collar and Plug
- 8000 lb** Maximum Gross Trailer Weight  
12000 lb with Weight Distribution
- 800 lb** Maximum Tongue Weight  
1200 lb with Weight Distribution

**33 SERIES**



**CLASS III-IV CUSTOM-FIT HITCH** TESTED TOUGH

- 2-in Square Receiver Tube Opening
  - Round Tubes Available on Some Models
  - Ball Mount, Pin and Clip Sold Separately
  - Attaches to Vehicle Frame and/or Bumper
  - Includes Distinctive Collar and Plug
- 5000 lb** Maximum Gross Trailer Weight
- 500 lb** Maximum Tongue Weight

**35 SERIES**



**CLASS III-IV CUSTOM-FIT HITCH** TESTED TOUGH

- 2-in Square Receiver Tube Opening
  - Round Tubes Available on Some Models
  - Ball Mount, Pin and Clip Sold Separately
  - Attaches to Vehicle Frame and/or Bumper
  - Includes Distinctive Collar and Plug
- 5000 lb** Maximum Gross Trailer Weight
- 500 lb** Maximum Tongue Weight

**36 SERIES**



Backed By a Limited Lifetime Warranty

**CLASS III-IV CUSTOM-FIT HITCH** TESTED TOUGH

- 2-in Square Receiver Tube Opening
  - Round Tubes Available on Some Models
  - Ball Mount, Pin and Clip Sold Separately
  - Attaches to Vehicle Frame and/or Bumper
  - Includes Distinctive Collar and Plug
- 7500 lb** Maximum Gross Trailer Weight  
12000 lb with Weight Distribution
- 750 lb** Maximum Tongue Weight  
1200 lb with Weight Distribution

**37 SERIES**



**CLASS III-IV CUSTOM-FIT HITCH** TESTED TOUGH

- 2-in Square Receiver Tube Opening
  - Round Tubes Available on Some Models
  - Ball Mount, Pin and Clip Sold Separately
  - Attaches to Vehicle Frame and/or Bumper
  - Includes Distinctive Collar and Plug
- 8000 lb** Maximum Gross Trailer Weight  
12000 lb with Weight Distribution
- 800 lb** Maximum Tongue Weight  
1200 lb with Weight Distribution

**44 SERIES**



**CLASS III CUSTOM-FIT HITCH**

- 2-in Square Receiver Tube Opening
  - Round Tubes Available on Some Models
  - Ball Mount, Pin and Clip Sold Separately
  - Attaches to Vehicle Frame and/or Bumper
- 6000 lb** Maximum Gross Trailer Weight  
10500 lb with Weight Distribution
- 600 lb** Maximum Tongue Weight  
1050 lb with Weight Distribution

**51 & 97 SERIES**



J Pin® Ready

**CLASS V CUSTOM-FIT HITCH**



2-in Square Receiver Tube Opening

- Designed for Full-Sized Long Wheelbase Trucks, Vans and Utility Vehicles with Full Frames and Heavy-Duty Suspensions
- Ideal for High Tongue Weight Applications
- Strong, Secure Heavy-Duty Side Bracket Design
- All Frame Attachments, J-Pin® Ready
- Black Powder Coat Finish Over E-Coat

Redesign of Ultra Frame® Receiver Includes Cast Center Section

- New Rugged Appearance
- Cast Steel Material
- Bigger Chain Loops and Reinforced Pin Hole
- Up Rated - More Tongue Weight

**15000 lb** Maximum Gross Trailer Weight  
16000 lb with Weight Distribution

**1500 lb** Maximum Tongue Weight  
1600 lb with Weight Distribution

**96 SERIES**



METAL SHIELD®  
RESTS RUST & CORROSION

Click Here to Go to Our Application Guide

**CLASS V CUSTOM-FIT HITCH**



2-1/2-in Square Receiver Tube Opening

- Designed for Full-Sized Long Wheelbase Trucks, Vans and Utility Vehicles with Full Frames and Heavy-Duty Suspensions
- Ideal for High Tongue Weight Applications (Toy Hauler & Commercial)
- Strong, Secure Heavy-Duty Side Bracket Design
- All Frame Attachments, J-Pin® Ready
- Pin, Clip, Receiver Tube Cover and Welded Electrical Bracket Included

**18000 lb** Maximum Gross Trailer Weight  
18000 lb with Weight Distribution

**2000 lb** Maximum Tongue Weight  
1800 lb with Weight Distribution

**45 SERIES**



METAL SHIELD®  
RESTS RUST & CORROSION




A Complete Line of Towing Products and Vehicle Accessories Available by Special Order

**25K FOLD-DOWN GOOSENECK HITCHES**

- Above Bed, Below Bed or Fold Down Hitches Available
- 25000 To 30000 lb Rating
- Easy Installation and Removal
- Rail Kits Available For Most Applications

8339

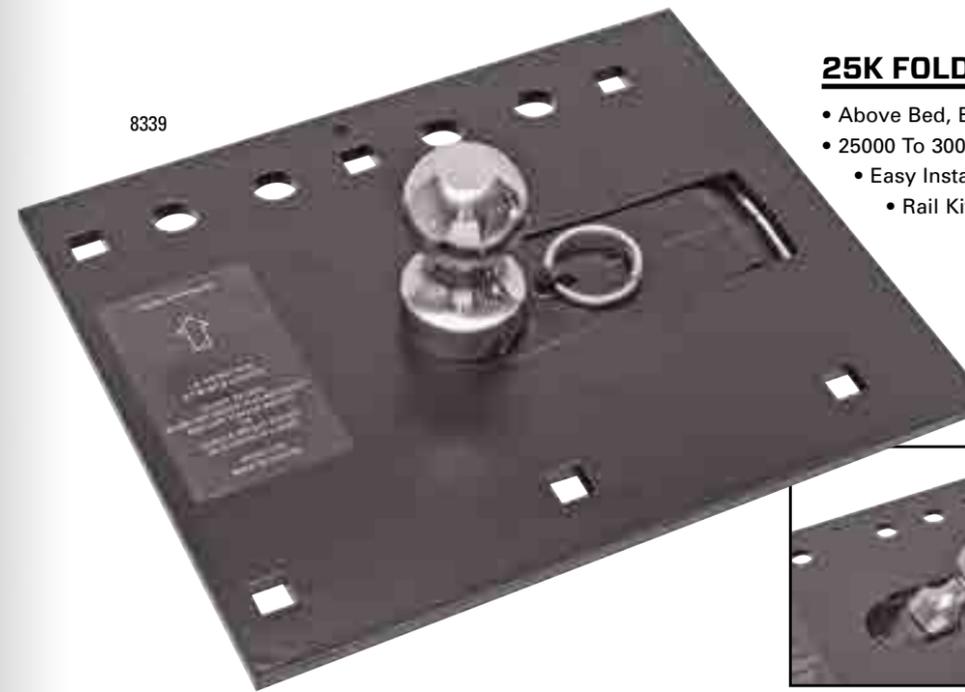

Takes only seconds to raise or lower the ball into positions

**SPECIAL ORDER PROGRAM**

Can't find the Reese Towpower product that you're looking for on the shelf? There is a complete line of towing products and vehicle accessories available by special order.

Special Ordering products is quick and easy. Simply find the name and part number of the Reese Towpower product that you would like and ask your in-store customer service specialist for assistance. They will give you an approximate shipping time and cost for your desired item.

**CALL 800-234-6992 TO ORDER**

Special Order Items Include:

- Custom Fit Hitches for Class I, II, & III Towing Applications
- Class IV/V Hitches for heavy duty towing
- Weight Distributing Systems
- Front Mount Receivers
- Fifth Wheel Towing Solutions
- Electrical Products
- Bike Carriers, Cargo Management Products & Accessories
- Ramps and Jacks

Items are shipped ground via common carrier and typically takes 3-5 business days to arrive. Your in-store customer service specialist will contact you to pick up the product when it arrives.



**ROUND GOOSENECK  
ADJUSTABLE COUPLER**

- Easy-Grip Locking Handle Is Accessible From Any Position, Even With Gloves
- Self-Centering Locking Plate Lets You Miss The Ball by More Than an Inch
- Tight Ball Fit Reduces Jamming When Changing Speeds or on Rough Roads
- Heavy-Duty Construction Provides Unmatched Strength
- User-Friendly Design is Simple to Use
- Quick To Hook Up and Disconnect
- Easy Vertical 8-in Adjustment
- Overall Retracted Height: 29.2-in
- Primer Finish
- 2-5/16-in Ball Size

**0287640300** 20000 lb  
**0289340317** 25000 lb, with cable release.

0287640300

0289340317



Over Half the Fifth Wheels on the Road Today are Towed by REESE Fifth Wheel Hitches



30056

**FIFTH WHEEL HITCHES**

- 4-Way Pivoting Head
  - Full 5 Degrees Of Side-To-Side Pivot for Easy Hook-Ups On Uneven Ground
  - Rounded Slide Bar Jaw Mechanism; Designed for Automatic Self-Latching
  - One-Piece Formed Legs; Provides a Wider Footprint for Superior Stability
  - Universal Mounting Kit Included (#30035)
  - 15000 lb Capacity; 3750 lb Pin Weight Capacity
- Available by Special Order



30035

5th Wheel Rails and Installation Kit

**FRONT MOUNT RECEIVERS**



- 2-in** Square Receiver Tube Opening
- Up to 9000 lb Line Pull / 500 lb TW
  - Front Mounted Receivers Offer A Secure And Useful Attachment Point
  - All Frame Attachments, J-Pin® Ready

[Click Here to Go to Our Application Guide](#)



**WINCH MOUNTING PLATE**

An Easily Removable Platform for Mounting Your Winch

**80409**



**HANDLE KIT**

Handle Kit for 6495 Winch Mounting Plate

**6980**



**SPARE TIRE CARRIER**

Provides Up Front Carriage of Spare, Universal Bolt Pattern

**6980**



**WORK STEP**

Provides Easy Access to Engine, Can Be Used on Rear Class III/IV Receivers

**6758**

**RECEIVER TUBE SKID SHIELD**

Recommended for Use with Receivers Mounted Below the Bumper

**6980**



**LICENSE PLATE ADAPTER**

Solves the Problem of the Front Hitch Interfering with the License Plate

**5443**



**FOLD DOWN LICENSE PLATE HOLDER**

**49802**

**1-1/4 TO 2-IN RECEIVER ADAPTERS**

- Enables 1-1/4-in Receiver to Fit Popular 2-In Accessories Such as Bike and Cargo Carriers
- 7020500** 6-in length  
**7022900** 10-in length



**2 TO 1-1/4-IN RECEIVER ADAPTER**

- Use 1-1/4-in Accessories with 2-in Hitches
  - 300/3500 lb Capacity
  - Ideal for Bike Racks & Cargo Carriers
- 7052500** 7-in length



**2-1/2 TO 2-IN RECEIVER ADAPTER**

- Use 2-in Accessories with 2-1/2-in Hitches
  - Ideal for Bike Racks and Cargo Carriers
- 7028700**



**RECEIVER TUBES, SIZED WITH COLLARS**

- For 2-in Hitch bars
- 11021** 12-in long  
**11080** 6-in long



**HITCH BOX EXTENSIONS - 2 X 2-IN RECEIVER**

- Weight Carrying Capacity - 400/4000 lb
  - Weight Distribution Capacity - 650/6500 lb
- 11003** 14-in length  
**11004** 18-in length  
**11006** 18-in length, with Step






**BRIGHT ZINC**  
 Provides extreme corrosion resistance.  
 Maintenance-free finish.  
 Increases durability.



**METAL SHIELD®**  
**RESISTS RUST & CORROSION**  
 A specialized OEM coating process for a superior look and finish.  
 Products are dipped in a Zinc-Phosphate base, a rust resistant coating that provides unmatched coverage in hard to fill-in areas.  
 A secondary powder coat layer is applied for TWO layers of superior protection.



**STAINLESS STEEL**  
 Completely resistant against rust and corrosion.  
 Attractive polished stainless finish.  
 A lifetime of protection from rust and corrosion.

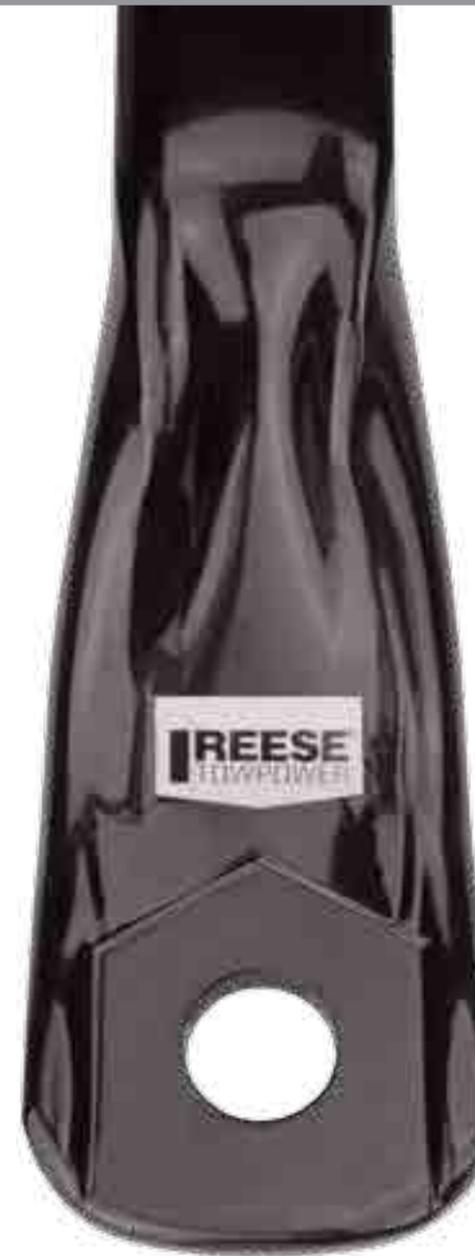

**O.E.M. POWDER COAT**  
 Applied over e-coat finish = two layers of superior protection.  
 Increased corrosion resistance.  
 Protects against UV rays, high humidity & extreme temperatures.  
 Provides excellent abrasion, scuffing, scratching & impact resistance.



**CHROME PLATED**  
 Chrome plated steel with high gloss finish.  
 Prevents rust and corrosion.  
 Wear resistant.



**BLACK NICKEL**  
 Enhanced corrosion protection.  
 Enhanced appearance.  
 Unique look.

**SUPERIOR PROTECTION - SECOND TO NONE**  
 Many competitive Hitches and Ball Mounts have only a single layer of paint which is inadequate protection against rust and corrosion. REESE® Towpower Hitches and Ball Mounts are available in a number of finishes that provide a weather-resistant secondary layer of enhanced protection.

# CARBON FORGED

## TECHNOLOGY

WATCH HOW-TO VIDEOS

REESE®, the market leader in towing, has fundamentally changed the approach to ball mounts with an innovative and patented line of products. CarbonFORGED ball mounts offer users greater towing capacity through its innovative one-piece construction providing unequalled quality and performance in a unique weld-free design and quality finish.



### CARBON FORGED BALL MOUNTS

Part No	Finish	Drop	Rise	Box Opening	Hitch Ball Hole Size	Capacity
7067900	O.E.M. BLACK	1-1/4-in	3/4-in	1-1/4-in	3/4-in	350/3500 lb
7068000	O.E.M. BLACK	2-in	1-1/2-in	1-1/4-in	3/4-in	350/3500 lb
7068300	O.E.M. BLACK	3-in	2-1/2-in	1-1/4-in	3/4-in	350/3500 lb
7060700	BLACK NICKEL	2-in	1/2-in	2-in	1-in	700/7000 lb
7060800	BLACK NICKEL	3-in	1-1/2-in	2-in	1-in	600/6000 lb
7060500	CHROME	2-in	1/2-in	2-in	1-in	700/7000 lb
7060600	CHROME	3-in	1-1/2-in	2-in	1-in	600/6000 lb
7062800	O.E.M. BLACK	2-in	1/2-in	2-in	1-in	700/7000 lb
7062900	O.E.M. BLACK	3-in	1-1/2-in	2-in	1-in	600/6000 lb
7065700	O.E.M. BLACK	4-in	2-1/2-in	2-in	1-in	500/5000 lb
7068100	O.E.M. BLACK	5-in	3-1/2-in	2-in	1-in	500/5000 lb

### CARBON FORGED HITCH BALLS

Part No	Finish	Ball Diameter	Shank Diameter	Shank Length	Capacity
7060400	BLACK NICKEL	2-in	1-in	2-in	7500 lb
7071100	CHROME	1-7/8-in	3/4-in	1-1/2-in	3500 lb
7071200	CHROME	1-7/8-in	1-in	2-in	3500 lb
7061200	CHROME	2-in	1-in	2-in	7500 lb
7071000	CHROME	2-5/16-in	1-in	2-in	7500 lb
7071400	STAINLESS STEEL	2-in	1-in	2-in	7500 lb

- Unique One Piece Formed Design
- 100,000 Mile Road Tested Simulated enhanced fatigue test
- Easy Load Taper
- Weld Free Construction
- Quality Finish
- Patented and Patents Pending
- Up-rated Towing Capacity up to 7000 lb
- InterLock® Tightening System





InterLock® One Wrench Tightening System



**ONE BALL MOUNT  
ONE BALL  
ONE WRENCH!**

Our Patented One Wrench Tightening System -  
Fast, Easy, Accurate and Secure!



Easy Load Angle

**EASY LOAD TAPER**

Our Tapered Ball Mounts ensure a fast smooth assembly of your new towing system.

METAL SHIELD®



21900

21901

FITS **1 1/4** in  
RECEIVER  
OPENING

**CLASS II  
INTERLOCK BALL MOUNTS**

Part No	Finish	Drop	Box Opening	Hitch Ball Hole Size	Capacity
<b>21901</b>	METAL SHIELD	1-1/4-in	1-1/4-in	3/4-in	3500/300 lb
<b>21900</b>	METAL SHIELD	2-1/2-in	1-1/4-in	3/4-in	3500/300 lb



21794

21793

21792

FITS **2** in  
RECEIVER  
OPENING

**CLASS III  
INTERLOCK BALL MOUNTS**

Part No	Finish	Drop	Box Opening	Hitch Ball Hole Size	Capacity
<b>21792</b>	METAL SHIELD	2-in	2-in	1-in	6000/600 lb
<b>21793</b>	METAL SHIELD	3-1/4-in	2-in	1-in	5000/500 lb
<b>21794</b>	METAL SHIELD	5-1/4-in	2-in	1-in	5000/500 lb

CHROME



7034400

7034300

FITS **2** in  
RECEIVER  
OPENING

**CLASS II & III  
INTERLOCK BALL MOUNTS**

Part No	Finish	Drop	Box Opening	Hitch Ball Hole Size	Capacity
<b>7034300</b>	CHROME	2-in	2-in	1-in	6000/600 lb
<b>7034400</b>	CHROME	3-1/4-in	2-in	1-in	5000/500 lb

STAINLESS STEEL




21791

21790

FITS **2** in  
RECEIVER  
OPENING

**CLASS II & III  
INTERLOCK BALL MOUNTS**

Part No	Finish	Drop	Box Opening	Hitch Ball Hole Size	Capacity
<b>21790</b>	STAINLESS STEEL	2-in	2-in	1-in	6000/600 lb
<b>21791</b>	STAINLESS STEEL	3-1/4-in	2-in	1-in	5000/500 lb

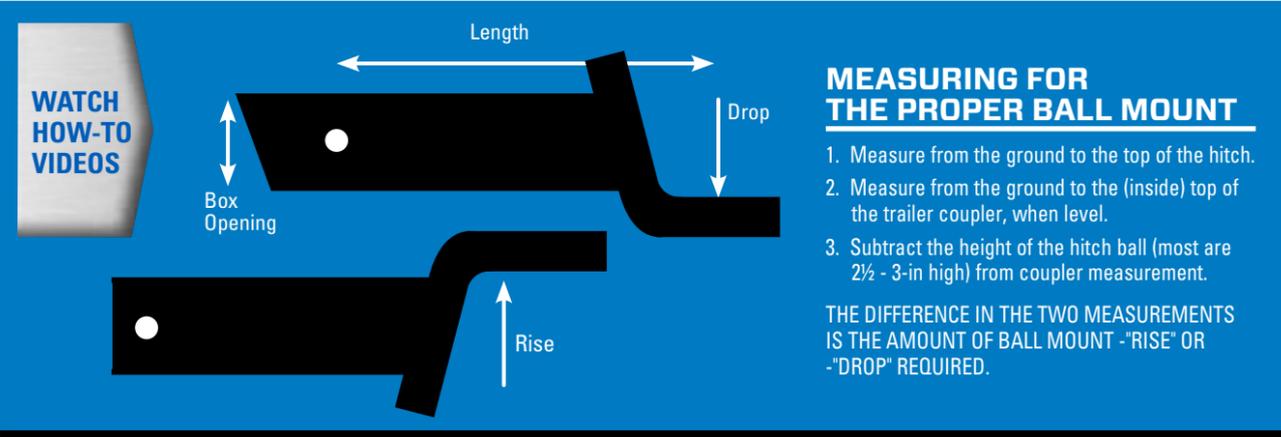

**Selecting The Right Ball Mount**

**BRIGHT ZINC**



**FITS 1/4 in RECEIVER OPENING**

**CLASS II STANDARD BALL MOUNTS**

Part No	Finish	Drop	Box Opening	Hitch Ball Hole Size	Capacity
<b>06280</b>	<b>ZINC</b>	1-1/4-in	1-1/4-in	3/4-in	3500/300 lb
<b>06474</b>	<b>ZINC</b>	2-1/2-in	1-1/4-in	3/4-in	3500/300 lb

**CHROME**



**FITS 2 in RECEIVER OPENING**

**CLASS III STANDARD BALL MOUNTS**

Part No	Finish	Drop	Box Opening	Hitch Ball Hole Size	Capacity
<b>21287</b>	<b>CHROME</b>	2-in	2-in	1-in	6000/600 lb
<b>21288</b>	<b>CHROME</b>	3-1/4-in	2-in	1-in	5000/500 lb
<b>21289</b>	<b>CHROME</b>	5-1/4-in	2-in	1-in	5000/500 lb

**STANDARD BALL MOUNTS**

**WATCH HOW-TO VIDEOS**

**1/4 in RECEIVER OPENING** **Class I & II** Light to Medium Duty 2,000 to 3,500 lb Gross Towing Capacity

**2 in RECEIVER OPENING** **Class III & IV** Heavy Duty 5,000 to 8,000 lb Gross Towing Capacity

**2 1/2 in RECEIVER OPENING** **Class V** Extra Heavy Duty Up to 18,000 lb Gross Towing Capacity

**Color Code Guide** Look for Reese Towpower's exclusive color code system to find the right Ball Mount, Hitch Ball, Coupler and security for your new hitch.

**METAL SHIELD®**



**FITS 2 in RECEIVER OPENING**

**CLASS III STANDARD BALL MOUNTS**

Part No	Finish	Drop	Box Opening	Hitch Ball Hole Size	Length	Capacity
<b>21171</b>	<b>METAL SHIELD</b>	2-in	2-in	1-in	8-in	6000/600 lb
<b>21175</b>	<b>METAL SHIELD</b>	3-1/4-in	2-in	1-in	8-1/2-in	6000/600 lb
<b>21344</b>	<b>METAL SHIELD</b>	4-in	2-in	1-in	9-in	5000/500 lb
<b>21345</b>	<b>METAL SHIELD</b>	4-in	2-in	1-in	11-in	6000/600 lb
<b>21186</b>	<b>METAL SHIELD</b>	5-1/4-in	2-in	1-in	10-in	5000/500 lb
<b>21347</b>	<b>METAL SHIELD</b>	8-in	2-in	1-in	10-in	5000/500 lb



CHROME

METAL SHIELD®



FITS 2 1/2 in RECEIVER OPENING

**CLASS V - HEAVY DUTY STANDARD BALL MOUNTS**

Part No	Finish	Drop	Opening	Hitch Ball Hole Size	Capacity
<b>7028100</b>	METAL SHIELD	3-in	2-1/2-in	1-1/4-in	14000/1400 lb
<b>7028200</b>	METAL SHIELD	5-in	2-1/2-in	1-1/4-in	13000/1300 lb
<b>7028300</b>	METAL SHIELD	7-3/4-in	2-1/2-in	1-1/4-in	13000/1300 lb

**2-1/2-in to 2-in ADAPTER**  
**7028700**



1 1/4 in SHANK DIAMETER

**CLASS V - 1-1/4-IN STANDARD HITCH BALL**

Part No	Finish	Ball Dia.	Shank Dia.	Shank Length	Capacity
<b>7028400</b>	CHROME	2-5/16-in	1-1/4-in	2-3/4-in	12000 lb
<b>7028500</b>	CHROME	2-5/16-in	1-1/4-in	2-3/4-in	14000 lb
<b>7028600</b>	CHROME	2-5/16-in	1-1/4-in	2-3/4-in	17000 lb



A Towing Product Line for the New, Popular, Heavy Duty Towing Gross Trailer Weights

CHROME

METAL SHIELD®



1 1/4 in SHANK DIAMETER

**CLASS V - 1-1/4-IN INTERLOCK HITCH BALL**



Part No	Finish	Ball Dia.	Shank Dia.	Lift	Capacity
<b>7063400</b>	CHROME	2-5/16-in	1-1/4-in	Standard	14000 lb

FITS 2 1/2 in RECEIVER OPENING

**CLASS V - HEAVY DUTY INTERLOCK BALL MOUNTS**



Part No	Finish	Drop	Box Opening	Hitch Ball Hole Size	Capacity
<b>7063200</b>	METAL SHIELD	3-in	2-1/2-in	1-1/4-in	14000/1400 lb
<b>7063300</b>	METAL SHIELD	5-in	2-1/2-in	1-1/4-in	13000/1300 lb



FITS 2 in RECEIVER OPENING

METAL SHIELD®

**CLASS III/IV - FORGED STANDARD 16000 LB BALL MOUNTS**

Part No	Finish	Drop	Box Opening	Hitch Ball Hole Size	Length	Capacity
21330	METAL SHIELD	2-in	2-in	1-1/4-in	9-1/2-in	16000/1600 lb
21331	METAL SHIELD	4-in	2-in	1-1/4-in	10-in	13000/1300 lb
21332	METAL SHIELD	6-in	2-in	1-1/4-in	10-1/2-in	16000/1600 lb

FITS 2 in RECEIVER OPENING

**CLASS III - ADJUSTABLE WEIGHT CARRYING BALL MOUNT**

Part No	Box Opening Dimensions	Drop Range	Rise Range	Hitch Ball Hole Size	Length	Capacity
21141	2-in	3-in to 7-1/2-in	3-in to 6-1/4-in	1	13-1/2-in	5000/500 lb



3/4 in SHANK DIAMETER

CHROME

**INTERLOCK HITCH BALLS**

Part No	Finish	Ball Diameter	Shank Diameter	Shank Length	Capacity
7008100	CHROME	1-7/8-in	3/4-in	1-1/2-in	2000 lb
7008400	CHROME	1-7/8-in	3/4-in	2-3/8-in	2000 lb
7008200	CHROME	2-in	3/4-in	1-1/2-in	3500 lb
7008500	CHROME	2-in	3/4-in	2-3/8-in	3500 lb



1 in SHANK DIAMETER

CHROME

**INTERLOCK HITCH BALLS**

Part No	Finish	Ball Diameter	Shank Diameter	Shank Length	Capacity
7008700	CHROME	1-7/8-in	1-in	2-in	2000 lb
7008300	CHROME	2-in	1-in	2-in	6000 lb
7008600	CHROME	2-5/16-in	1-in	2-in	6000 lb



1 in SHANK DIAMETER

STAINLESS STEEL

**INTERLOCK HITCH BALLS**

Part No	Finish	Ball Diameter	Shank Diameter	Shank Length	Capacity
7011300	STAINLESS STEEL	2-in	1-in	2-in	6000 lb
7011400	STAINLESS STEEL	2-5/16-in	1-in	2-in	6000 lb



3/4 in SHANK DIAMETER

1 in SHANK DIAMETER

CARBON FORGED

**CARBON FORGED HITCH BALLS**

Part No	Finish	Ball Diameter	Shank Diameter	Shank Length	Capacity
7060400	BLACK NICKEL	2-in	1-in	2-in	7500 lb
7071100	CHROME	1-7/8-in	3/4-in	1-1/2-in	3500 lb
7071200	CHROME	1-7/8-in	1-in	2-in	3500 lb
7061200	CHROME	2-in	1-in	2-in	7500 lb
7071000	CHROME	2-5/16-in	1-in	2-in	7500 lb
7071400	STAINLESS STEEL	2-in	1-in	2-in	7500 lb





74004



74010



74294

**3/4 in**  
SHANK  
DIAMETER

**STANDARD HITCH BALLS**

Part No	Finish	Ball Diameter	Shank Diameter	Shank Length	Capacity
<b>74006</b>	CHROME	1-7/8-in	3/4-in	1-1/2-in	2000 lb
<b>74004</b>	ZINC	1-7/8-in	3/4-in	1-1/2-in	2000 lb
<b>7028900</b>	CHROME	1-7/8-in	3/4-in	2-3/8-in	2000 lb
<b>74023</b>	CHROME	1-7/8-in	3/4-in	3-3/8-in	2000 lb
<b>74008</b>	CHROME	2-in	3/4-in	1-1/2-in	3500 lb
<b>74007</b>	ZINC	2-in	3/4-in	1-1/2-in	3500 lb
<b>74020</b>	CHROME	2-in	3/4-in	2-3/8-in	3500 lb
<b>74025</b>	CHROME	2-in	3/4-in	3-3/8-in	3500 lb

**1 in**  
SHANK  
DIAMETER

**STANDARD HITCH BALLS**

Part No	Finish	Ball Diameter	Shank Diameter	Shank Length	Capacity
<b>74022</b>	CHROME	1-7/8-in	1-in	2-in	2000 lb
<b>74024</b>	CHROME	1-7/8-in	1-in	3-1/4-in	2000 lb
<b>74010</b>	CHROME	2-in	1-in	2-in	6000 lb
<b>74009</b>	ZINC	2-in	1-in	2-in	6000 lb
<b>74026</b>	CHROME	2-in	1-in	3-1/4-in	6000 lb
<b>74021</b>	CHROME	2-5/16-in	1-in	2-in	6000 lb
<b>74011</b>	ZINC	2-5/16-in	1-in	2-in	6000 lb

**1/4 in**  
SHANK  
DIAMETER

**STANDARD HITCH BALLS**


Part No	Finish	Ball Diameter	Shank Diameter	Shank Length	Capacity
<b>74294</b>	CHROME	2-5/16-in	1-1/4-in	2-1/2-in	12000 lb



7027800

**REPLACEMENT NUTS AND WASHERS**

- 7027800** 3/4-in Nut and Washer for Hitch Ball
- 7027900** 1-in Nut and Washer for Hitch Ball
- 7028000** 1-1/4-in Nut and Washer for Hitch Ball

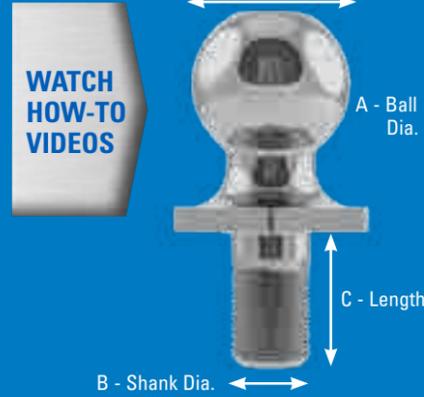

**SELECTING THE RIGHT HITCH BALL**

Always use the properly rated hitch ball for your towing system.

- Your towing system's maximum weight rating is always equal to the lowest rated item in the system
- Your hitching system cannot be upgraded to a rating higher than the maximum rating of your hitch

For example, a 3500 lb ball on a 2000 lb max trailer weight-rated hitch does not increase your towing capacity to 3500 lb. Your hitching system is still rated at 2000 lb.

Conversely, a 2,000 lb ball on a 3500 lb max trailer weight-rated hitch decreases your maximum towing capacity to 2000 lbs.

The hitch ball diameter (A) must be the same diameter as the trailer coupler (1-7/8, 2, or 2-5/16-in). The shank diameter (B) of the hitch ball should be the same as the hole diameter in the ball mount. The shank length (C) should be long enough to allow at least two threads to be visible when the hitch ball is installed and the nut completely tightened.

**REESE® Towpower - Solid Steel Hitch Balls - Engineered to Meet All Safety Requirements of SAE J-684.**



74309



**INTERCHANGEABLE HITCH BALL SYSTEMS**

Part No	Finish	Shank Diameter	Ratings GTW/TW	Hitch Ball Diameters
<b>74307</b>	CHROME	3/4-in	5000/500 lb	1-7/8, 2-in
<b>74308</b>	CHROME	1-in	8000/1000 lb	1-7/8, 2-in
<b>74309</b>	CHROME	1-in	8000/1000 lb	1-7/8, 2, 2-5/16-in



74307

**ATTACH SHANK**  
Attach correct shank to drawbar or ball mount. Torque to required tightness.

**ATTACH BALL**  
Select the correct ball size for your trailer. Place ball on shank.

**TIGHTEN LOCKING HEAD**  
Innovative locking screw requires only 1/4 turn to secure.

**YOU'RE READY TO TOW!**



7039800

FITS 2 in RECEIVER OPENING

**TRIPLE BALL MOUNTS**

Ball Diameter	Gross Weight	Tongue Weight
1-7/8-in	2000 lb	200 lb
2-in	6000 lb	600 lb
2-5/8-in	10000 lb	1000 lb

Part No.	Finish	Box Opening	Length
<b>7039800</b>	<b>BLACK NICKEL</b>	2-in	8-in
<b>21514</b>	<b>CHROME</b>	2-in	8-in
<b>21512</b>	<b>METAL SHIELD</b>	2-in	8-in
<b>7022400</b>	<b>METAL SHIELD</b>	2-in	8-in



7068800

FITS 2 1/2 in RECEIVER OPENING

**CLASS V TRIPLE BALL MOUNT**

Ball Diameter	Gross Weight	Tongue Weight
1-7/8-in	2000 lb	200 lb
2-in	10000 lb	1000 lb
2-5/8-in	14000 lb	1400 lb

Part No.	Finish	Box Opening	Length
<b>7068800</b>	<b>BLACK NICKEL</b>	2-1/2-in	?-in



21511

FITS 2 in RECEIVER OPENING

**DUAL BALL MOUNTS**

Ball Diameter	Gross Weight	Tongue Weight
1-7/8-in	2000 lb	200 lb
2-in	6000 lb	600 lb

Part No.	Finish	Box Opening	Length
<b>21511</b>	<b>METAL SHIELD</b>	2-in	10-in
<b>21518</b>	<b>METAL SHIELD</b>	2-in	10-in




Integrated Step with Safe Grip Pattern

FITS 2 in RECEIVER OPENING

**ROTATING HEIGHT ADJUSTABLE TRI-BALL MOUNT**

Part No	Finish	Box Opening	Length	1-7/8-in Capacity	2-in Capacity	2-5/16-in Capacity
<b>7068900</b>	<b>CHROME</b>	2-in	10-in	2000/200 lb	10000/1000 lb	14000/1400 lb

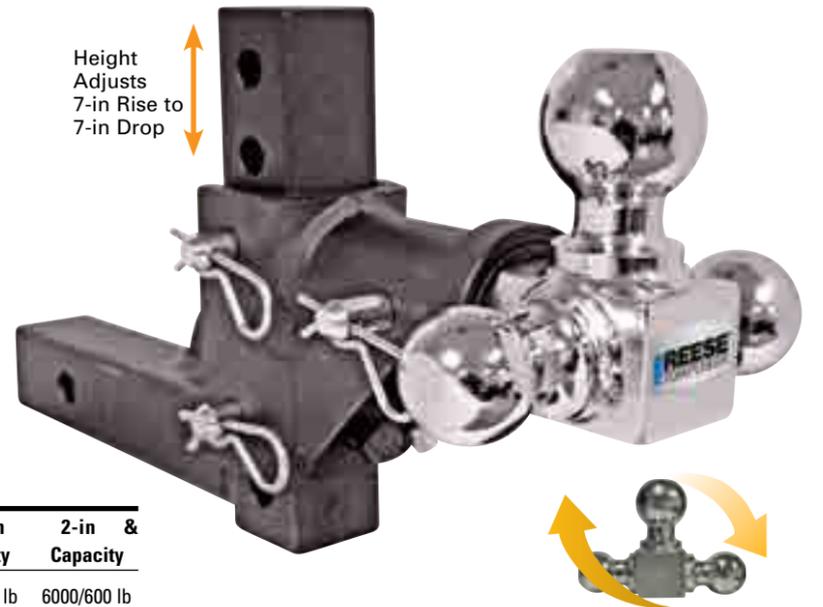

Height Adjusts 7-in Rise to 7-in Drop

FITS 2 in RECEIVER OPENING

**ROTATING HEIGHT ADJUSTABLE TRI-BALL**

2-5/16-in Part No	Finish	Box Opening	Length	1-7/8-in Capacity	2-in & Capacity
<b>7021800</b>	<b>CHROME</b>	2-in	10-in	2000/200 lb	6000/600 lb

7043100



METAL SHIELD®

FITS 1 1/4 in RECEIVER OPENING

CLASS II - INTERLOCK TOWING STARTER KITS



Part No	Box Opening	Drop	Ball Size	Length	Pin & Clip	Capacity
<b>7043000</b>	1-1/4-in-in	1-1/4-in	2-in	9-in	1/2-in	3500 lb
<b>7043100</b>	1-1/4-in	2-1/2-in	2-in	7-in	1/2-in	3500 lb

21542



FITS 2 in RECEIVER OPENING

CLASS III - INTERLOCK TOWING STARTER KITS



Part No	Box Opening	Drop	Ball Size	Length	Pin & Clip	Capacity
<b>21542</b>	2-in	2-in	2-in	8.5-in	5/8-in	6000/600 lb
<b>21543</b>	2-in	3-1/4-in	2-in	9-in	5/8-in	5000/500 lb

21536



FITS 2 in RECEIVER OPENING

CLASS III - STANDARD TOWING STARTER KITS

Part No	Box Opening	Drop	Ball Size	Length	Pin & Clip	Capacity
<b>21536</b>	2-in	2-in	2-in	8-in	5/8-in	6000/600 lb
<b>21556</b>	2-in	3-1/4-in	2-in	9-1/2-in	5/8-in	5000/500 lb
<b>7043200</b>	2-in	2-in	1-7/8-in	8-in	5/8-in	2000/200 lb

METAL SHIELD®

FITS 2 in RECEIVER OPENING

CLASS III - INTERLOCK TOWING SECURITY KITS



Part No	Box Opening	Drop	Ball Size	Length	Lock	Capacity
<b>7005100</b>	2-in	2-in	2-in	8.5-in	5/8-in	6000/600 lb
<b>7005200</b>	2-in	3-1/4-in	2-in	9-in	5/8-in	5000/500 lb

7005100



21554



FITS 2 in RECEIVER OPENING

CLASS III - INTERLOCK TOWING SECURITY KITS



Part No	Box Opening	Drop	Ball Size	Length	Lock	Capacity
<b>21554</b>	2-in	2-in	2-in	8.5-in	5/8-in	6000/600 lb

TOWING KITS

BLACK NICKEL

FITS 2 in RECEIVER OPENING


CLASS III - INTERLOCK BALL & BALL MOUNT



Part No	Box Opening	Ball Drop	Size	Length	Capacity
<b>7039200</b>	2-in	2-in	2-in	9-in	6000/600 lb
<b>7039300</b>	2-in	3-1/4-in	2-in	9-1/2-in	5000/500 lb

7039200



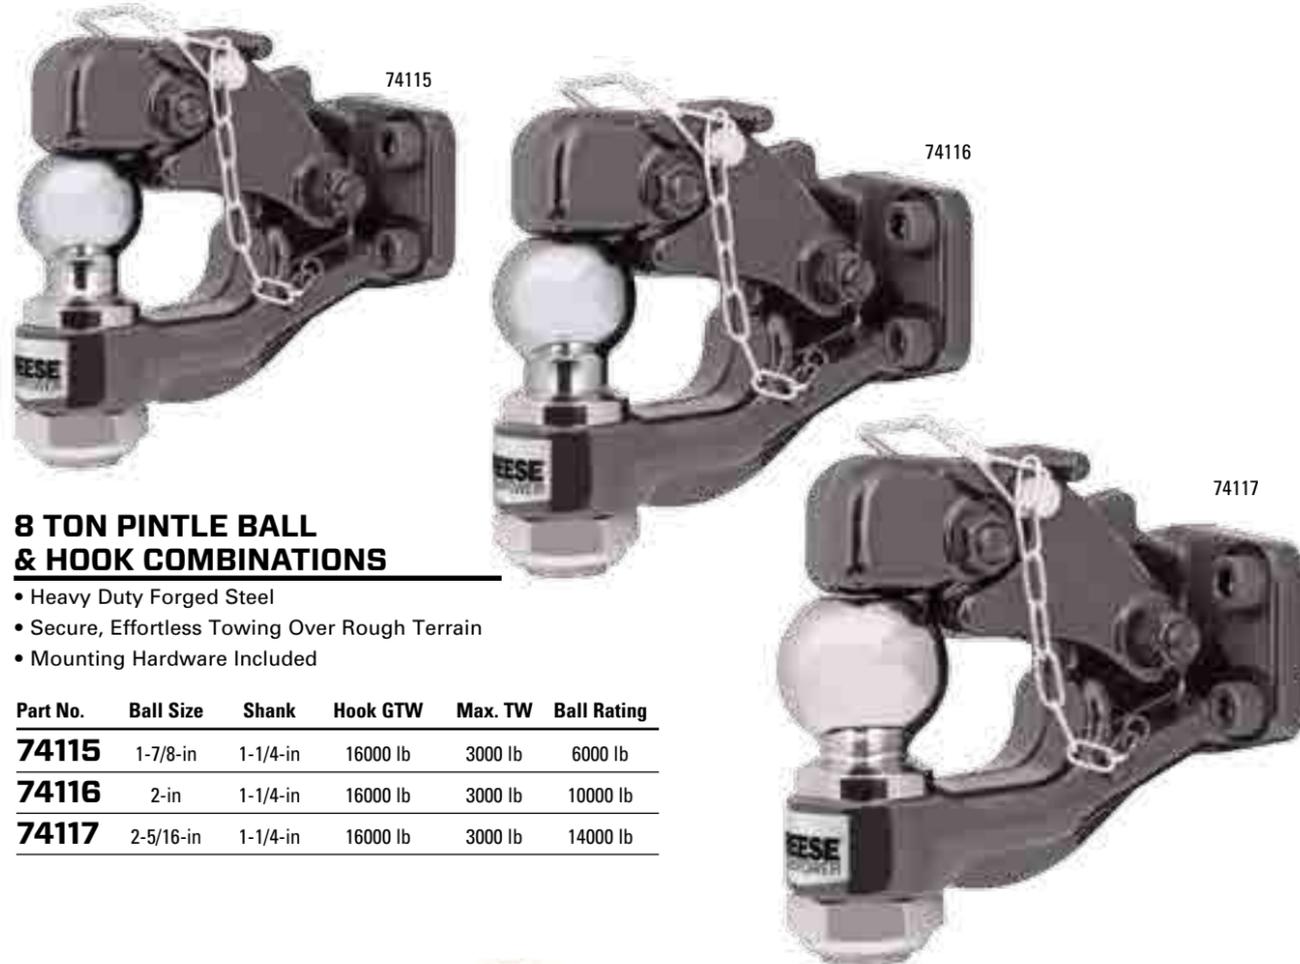

**8 TON PINTLE BALL & HOOK COMBINATIONS**

- Heavy Duty Forged Steel
- Secure, Effortless Towing Over Rough Terrain
- Mounting Hardware Included

Part No.	Ball Size	Shank	Hook GTW	Max. TW	Ball Rating
<b>74115</b>	1-7/8-in	1-1/4-in	16000 lb	3000 lb	6000 lb
<b>74116</b>	2-in	1-1/4-in	16000 lb	3000 lb	10000 lb
<b>74117</b>	2-5/16-in	1-1/4-in	16000 lb	3000 lb	14000 lb

**PINTLE REPLACEMENT BALLS**

Part No.	Description	Shank	Length	Capacity
<b>7021500</b>	1-7/8-in Replacement Ball	1-1/4-in	2-1/4-in	6000 lb
<b>7021600</b>	2-in Replacement Ball	1-1/4-in	2-1/4-in	10000 lb
<b>7021700</b>	2-5/16-in Replacement Ball	1-1/4-in	2-1/4-in	14000 lb



**LUNETTE RING**

Part No.	Max. GTW	Vert. Load
<b>7013700</b>	42000 lb	4000 lb

- 2-1/2-in Diameter, 4-in Hole
- Mounting Hardware Sold Separately

**PINTLE HOOK / REGULAR**

Part No.	Description	Max. GTW	Max. TW
<b>74118</b>	10-ton pintle hook	20000 lb	4000 lb
<b>74119</b>	15-ton pintle hook	30000 lb	6000 lb

- Mounting Hardware Included

**PINTLE HOOK MOUNTING PLATE**

Part No.	Box Opening	Shank Length	Plate Size	Max. GTW
<b>74281</b>	2-in	7-3/4-in	7-1/2 x 5-in	10000 lb



**PINTLE PIN AND CHAIN**

**7044900** 1/4-in Diameter Pin


**LUNETTE EYE LOCK**

**4210**



FITS 2 in RECEIVER OPENING

PINTLE HOOKS & EYES

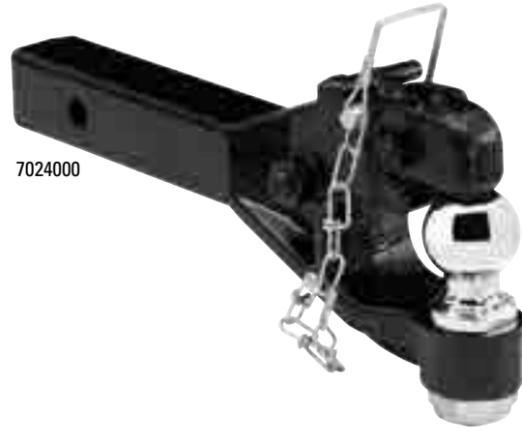

7024000

RECEIVER MOUNT PINTLE/BALL COMBO

Part No.	Ball Size	Box Opening	Max. GTW	Ball GTW	Max. VL
<b>7024000</b>	1-7/8-in	2-in	12000 lb	2000 lb	2400 lb
<b>7024100</b>	2-in	2-in	12000 lb	7000 lb	2400 lb
<b>7024200</b>	2-5/16-in	2-in	12000 lb	12000 lb	2400 lb



7024300

5 TON RECEIVER MOUNT PINTLE HOOK

Part No.	Box Opening	Max. GTW	Max. VL
<b>7024300</b>	2-in	10000 lb	2000 lb



7024400

FORGED RECEIVER MOUNT TOW HOOK

Part No.	Box Opening	GTW	Length
<b>7024400</b>	2-in	10000 lb	7-3/4-in



7024500

FORGED RECEIVER MOUNT TOW EYE

Part No.	Box Opening	GTW	Length
<b>7024500</b>	2-in	10000 lb	7-3/8-in

TOW RING & CLEVIS

FITS 2 in RECEIVER OPENING

RECEIVER MOUNT TOW RING

Part No.	Box Opening	GTW	Length
<b>7024600</b>	2-in	8000 lb	7-3/8-in




7024600

RECEIVER MOUNT CLEVIS

- Maximum Trailer - 6000 lb, Maximum Tongue - 600 lb
- 2-in x 2-in Shank

80409

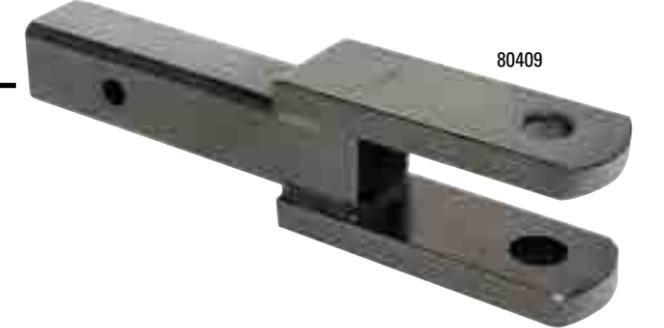

80409

1-IN DIAMETER CLEVIS PIN

- Heat Treated Grade 8 Steel
- Comfortable Soft Grip Handle
- Includes Cotter Pin
- 4-3/4-in Effective Length

7031700



70317



**TRI-BALL MOUNT WITH HOOK**

Balls and Hook are Chrome Plated

Part No.	Hitch Ball	Box Opening	Length	Capacity
<b>7031400</b>	1-7/8-in	2-in	8-in	2000/200 lb
	2-in	2-in	8-in	6000/600 lb
	2-5/16-in	2-in	8-in	10000/1000 lb
	Hook	2-in	8-in	10000 lb



**BALL MOUNT WITH HOOK**

Part No	Hitch Ball	Box Opening	Length	Capacity
<b>7051900</b>	2-in	2-in	8-in	6000/600 lb
	Hook	2-in	8-in	10000 lb

**PATENTED DUAL SELF LOCKING DESIGN**  
Even if the lock head is broken off, the pin cannot be removed from the hitch.

**STRONGER BREAK RESISTANCE**  
Our patented design maintains shaft diameter for maximum strength. Reducing the shaft's diameter creates weak points & allows easier breakage.

**SQUARE KEY DESIGN**  
Virtually eliminates lock picking.

**The Most Theft Deterrent Towing Lock Available - with TRIPLE Protection**



**PROFESSIONAL CLASS III & IV LOCKS**

- Heavy Duty Steel Design
- Security for Ball Mounts & Hitch Mounted Accessories

<b>7030200</b>	5/8-in Diameter Stainless Steel Receiver Lock
<b>7030300</b>	5/8-in Diameter Receiver Lock
<b>7030400</b>	5/8-in Diameter Bent Pin Receiver Lock
<b>7030600</b>	5/8-in Diameter Receiver Lock and Coupler Lock
<b>7070800</b>	1/2-in & 5/8-in Diameter Sleeved Receiver Lock
<b>7030500</b>	Coupler Lock

**PROFESSIONAL CLASS V LOCK**

- 3-1/2-in Span for 2-1/2-in Hitch Boxes

<b>7070700</b>	5/8-in Diameter Receiver Lock
----------------	-------------------------------



**EASY ACCESS RECEIVER & COUPLER LOCKS**

- Swivel Head for Convenient Front Access
- Durable Black Cover
- Easier Access

Part No.	Style	Finish	Pin Size	Rec. Opening	Length
<b>7057030</b>	Sleeved Receiver	Stainless Steel	1/2 & 5/8-in	1-1/4 & 2-in	2-7/8-in
<b>7054630</b>	Sleeved Receiver	Chrome	1/2 & 5/8-in	1-1/4 & 2-in	2-7/8-in
<b>7054430</b>	Bent Pin Receiver	Chrome	1/2 & 5/8-in	1-1/4 & 2-in	2 & 2-7/8-in
<b>7057530</b>	Bent Pin Receiver	Stainless Steel	1/2 & 5/8-in	1-1/4 & 2-in	2 & 2-7/8-in
<b>7054530</b>	Bent Pin Receiver Coupler Lock	Stainless Steel Stainless Steel	1/2 & 5/8-in	1-1/4 & 2-in	2 & 2-7/8-in
<b>7057130</b>	Class V Receiver	Stainless Steel	5/8-in	2-1/2-in	3-1/2-in
<b>7057230</b>	Class V Receiver	Chrome	5/8-in	2-1/2-in	3-1/2-in
<b>7057830</b>	Class V Bent Pin	Chrome	5/8-in	2-1/2-in	3-1/2-in
<b>7057330</b>	Adjustable Coupler	Stainless Steel			
<b>7057400</b>	Adjustable Coupler	Chrome			



**SQUARE KEY DESIGN**  
Virtually eliminates lock picking.



**EASY ACCESS LOCKS**

- 360° Rotating Head for Easy Lock Access
- Integrated Key Slot Cover Helps Protect Lock From Dirt
- Chrome Plated

**7009300** 1/2-in & 5/8-in Sleeved Easy Access lock

**7001100** Easy Access Coupler Lock

**7031500** Easy Access Adjustable Coupler Lock



360° Rotating Head for Easy Lock Access



Integrated Key Slot Cover Helps Protect Lock From Dirt



**ELITE BLACK NICKEL RECEIVER LOCK**

- Virtually Pick Proof Square Key Design
- Push-Button Lock Mechanism
- Rubber Cap Keeps Dirt Out
- Sleeved, Fits 5/8-in or 1/2-in Receiver Pin Holes

**7039000**



**ELITE SURE GRIP RECEIVER LOCK**

- Virtually Pick Proof Square Key Design
- Push-Button Lock Mechanism
- Rubber Cap Keeps Dirt Out
- Sure Grip Cushion Grip
- Sleeved, Fits 5/8-in or 1/2-in Receiver Pin Holes

**7039100**



SPARE TIRE CARRIERS

**SPARE TIRE CARRIERS**

- Mounts To Trailer Frame
- Fits Most RV, Marine and Utility Trailers
- Heavy Duty 1/2-in Diameter Construction
- Fits 8, 9, 12, 13, 14 and 15-in Wheels
- 4 or 5 Lug Rims
- Chrome Plated

**74247** Economy Spare Tire Carrier

**7019200** Marine Spare Tire Carrier with Locking Levers & Lock





**WATCH HOW-TO VIDEOS**

**RESEE SECURITY**

- Push-Button Lock Designs
- Dog Bone and Bent Pin Styles
- Rust Resistant Chrome Finish
- Includes Dust Cap

The Leader in Towing Safety & Security



7005600

**BARREL STYLE RECEIVER LOCKS**

- Fits 5/8-in or 1/2-in Pin Holes
- Push-Button Lock Mechanism
- For Use on Class I/II or III/IV Receivers
- Rubber Cap Keeps Dirt Out
- Bend Proof Tubular Key

**7005600** Chrome  
**7010100** Stainless Steel



7010200

**BARREL STYLE LOCKS COMBO PACK**

- Receiver Lock Fits 5/8-in or 1/2-in Pin Holes
- Push-Button Lock Mechanism
- For Use on Class I/II or III/IV Receivers
- Rubber Cap Keeps Dirt Out
- Bend Proof Tubular Key

**7010200** Chrome



7033300

3-1/2-in Span

**CLASS V BENT PIN STYLE RECEIVER LOCK**

- 3-1/2-in Span for 2-1/2-in Square Tube Receiver Hitches
- Fits 5/8-in Pin Holes
- Push-Button Lock Mechanism
- Rubber Cap Keeps Dirt Out

**7033300** Chrome



7033200

3-1/2-in Span

**CLASS V RECEIVER LOCKS**


- 3-1/2-in Span for 2-1/2-in Square Tube Receiver Hitches
- Fits 5/8-in Pin Holes
- Push-Button Lock Mechanism
- Rubber Cap Keeps Dirt Out
- Bend Proof Tubular Key

**7033200** Chrome

**CLASS I & II RECEIVER PINS WITH COMFORT GRIP**

1/2 in PIN DIAMETER

- For 1 1/4-in Receivers
  - Bright Zinc Finish
- 7009100** 1/2-in Diameter Pin  
**7010600** 1/2-in Diameter Pin  
**7063800** 1/2-in Diameter Pin

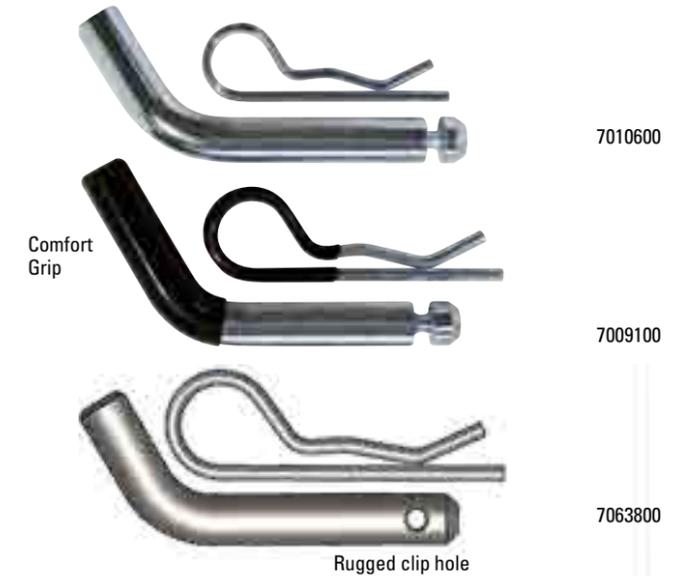

Comfort Grip

7010600

7009100

7063800

Rugged clip hole

**CLASS III & IV RECEIVER PIN & CLIP**

5/8 in PIN DIAMETER

- For 2-in Receivers
  - Bright Zinc Finish
- 7009200** 5/8-in Diameter Pin  
**7010500** 5/8-in Diameter Pin  
**7063900** 5/8-in Diameter Pin



Comfort Grip

7010500

7009200


7063900

Rugged clip hole

**CLASS V RECEIVER PIN & CLIP**

5/8 in PIN DIAMETER

- 3 1/2-in span for 2 1/2-in Receivers
  - Bright Zinc Finish
- 7033100** 5/8-in Diameter Pin  
**7057700** 5/8-in Diameter Pin

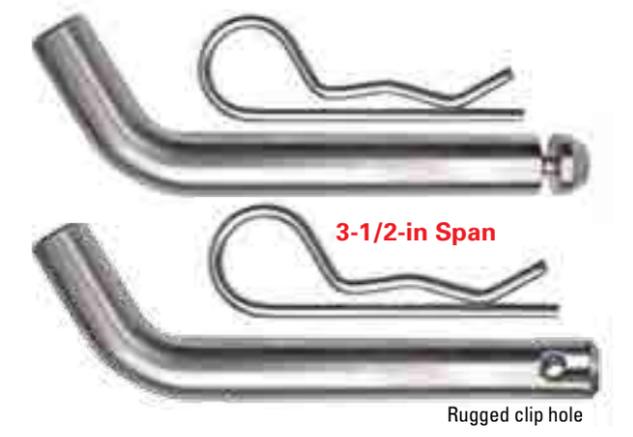

3-1/2-in Span

7033100

7057700

Rugged clip hole



7014500

**ANTI-THEFT RECEIVER PINS - WITH LOCK**

- Swivel Latch
- Brass Lock with Key
- Bright Zinc Finish

**7014500** 5/8-in Diameter  
**7021200** 1/2-in or 5/8-in Sleeved



7021200



7007100

**ANTI-THEFT RECEIVER PINS\***

- Swivel Latch
- Bright Zinc Finish

**7006700** 1/2-in or 5/8-in Sleeved  
**7007100** 5/8-in  
**7007200** 1/2-in  
**7007300** 5/8-in, Stainless Steel

\* Lock sold separately



7006700



7006800

**SLEEVED RECEIVER PIN & CLIP**

- Bright Zinc Finish

**7006800** 1/2-in or 5/8-in Sleeve Pin



15058

**ERGO CLIPS® PIN & CLIP**

- Unique Design, Better Clearance
- .148-in Wire Diameter

**15058** 5/8-in Diameter Pin

**ERGO CLIPS® 2 PK CLIPS**

- Unique Design, Better Clearance
- Ergonomic Design for Easier Installation
- Hi-vis comfort grips.

**16210C** 148-in Wire Diameter



16210C



Unique Ergonomic Design

**BALL MOUNT LOCK**

- Flat key Design, Keys Can Be Copied By Most Retailers
- Includes 2 Keys and Vinyl Lock Cover
- Chrome Plated

**7006400** Class I & II receivers and fifth wheel base rails 1/2-in dia., 3-1/4-in working area

**7006500** Class III, IV receivers, 5/8-in dia.



7006500

**DUAL, BENT PIN RECEIVER LOCK**

- Convenient Push-Button Lock Mechanism
- Flat Key Design
- Rubber Cap Keeps Dirt Out
- Fits Class I/II or III/IV Receivers

**7006000** Interchangeable to 5/8-in & 1/2-in, Chrome plated

**7000400** Interchangeable to 5/8-in & 1/2-in, Stainless steel



7006000

**DUAL, BENT PIN STYLE RECEIVER/ COUPLER LOCK COMBO PACK**

- Interchangeable for use as 1/2-In & 5/8-In
- Push-Button Lock with Flat Key Design
- Rubber Cap Keeps Dirt Out
- Chrome Plated
- Fits Class I/II or III/IV Receivers
- Brass Coupler Lock

**7006100**



7006100

**2-PACK SECURITY LOCK SET**

- Fits both 5/8-in & 1/2-in Openings
- Use for Adapters Requiring Both Size Hitch Pins

**7023900**



7023900



7031600



Great For  
Bike Racks  
& Cargo trays!

**EASY ACCESS RECEIVER LOCK AND CABLE**

- Sleeved Receiver Lock (1/2-in & 5/8-in)
- Lock Works With Or Without Cable
- 12' Vinyl Coated Steel Cable
- 360° Head For Easy Locking/Unlocking
- Fully Removable Cable

**7031600**



7033830



**SPARE TIRE SECURITY**

- Heavy Duty
- 5/16-in Diameter x 4-ft Vinyl Coated Braided Cable With Looped Ends
- 40 Mm Laminated Steel Padlock
- Security for Ladders, Utilities, Spare Tires, Tools

**7033830** Cable and Lock



7032100



Also fasten lock  
back onto cable

**SURELOK™ RETRACTABLE CABLE LOCKING SYSTEM**

Loop it, lock it and leave it. Lock all your gear with the SureLok™ retractable cable system. Its simple design secures everything from ATVs and bikes to portable tools, generators and camping gear.

**7032100**



7006600

**TRAILER COUPLER LOCK**

- Fits Most Couplers
- Flat Key Design

**7006600**



7005300

7005800

**TRAILER COUPLER LOCK**

- Adjustable From 5/8-in to 1-in
- Flat Key Design

**7005300** Brass

**7005800** Stainless Steel



7042100

**TRAILER COUPLER LOCK**

- Adjustable From 5/8-in to 3-in
- Flat Key Design

**7042100** Brushed Silver Finish



72783

**UNIVERSAL COUPLER LOCK**

- Heavy Duty Die Cast Steel Design
- Ratchet Design With 11 Locking Positions
- Fits 1-7/8-in, 2-in and 2-5/16-in Couplers
- Provides Security for Trailer When in Storage

**72783**



7014700

**TOW AND STORE ANTI-THEFT LOCK KIT**



Complete Security When Towing Or Storing Includes:

- Universal Coupler Lock (72783, see above)
- Brass Coupler Lock (7005300, see above)
- Dual Bent Pin Lock (7006000, see page 47)

**7014700**



7066900

**PROFESSIONAL COUPLER LOCK**

- Heavy Duty Die Cast Aluminum Design
- Ratchet Design With 11 Locking Positions
- Fits 1-7/8-in, 2-in and 2-5/16-in Couplers
- Square Key Virtually Eliminates Lock Picking
- Provides Security for Trailer When in Storage

**7066900**




WATCH HOW-TO VIDEOS

**Safety Chains are Required By Law in Most States**

**SAFETY CHAINS**

- Safety Chains are Required By Law in Most States
- Bright Zinc Finish

Part No.	Capacity	Length	Attachment
<b>7025700</b>	2000 lb	72-in	2 Quick Links
<b>74059</b>	5000 lb	72-in	2 Quick Links
<b>7007700</b>	2000 lb	72-in	2 S - Hooks
<b>7007800</b>	5000 lb	72-in	2 Quick Links
<b>72786</b>	5000 lb	36-in	1 Quick Link and 1 U-Bolt
<b>7007600</b>	5000 lb	36-in	1 Quick Link and 1 U-Bolt

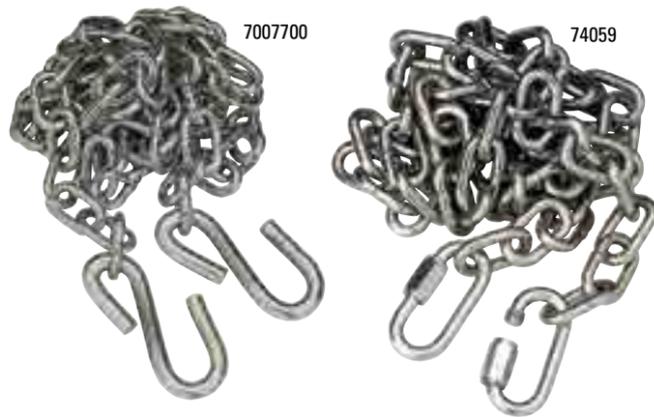

**QUICK LINKS**

- For use with safety chains or as tie-downs
- Chrome finish

Part No.	Size	Capacity	Quantity	Class
<b>7007900</b>	5/16-in	5000 lb	2 links per pack	Class III
<b>7008000</b>	1/4-in	3500 lb	2 links per pack	Class II



**TOWING SAFETY CABLES**

- 5000 lb Rating 40-in Long w/Vinyl Coating, Protects From Rust & Corrosion
- Self Coiling Cables & Spring Loaded Safety Latch Keeps Hook in Place
- Heavy Duty Forged Hooks


**7007500** Set of 2



**SURFACE MOUNT TOW HOOK**

- Black Tow Hook, 10000 lb Rating

**7007400**

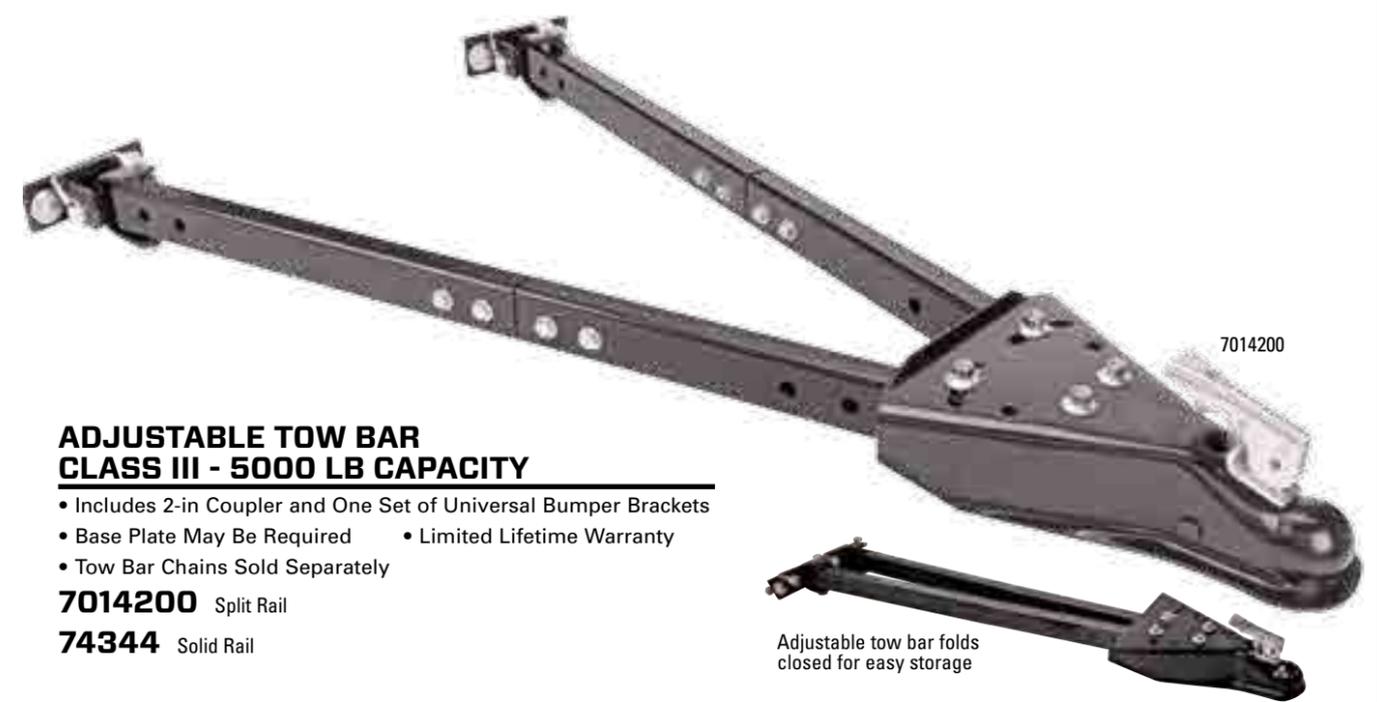

**ADJUSTABLE TOW BAR CLASS III - 5000 LB CAPACITY**

- Includes 2-in Coupler and One Set of Universal Bumper Brackets
- Base Plate May Be Required
- Limited Lifetime Warranty
- Tow Bar Chains Sold Separately

**7014200** Split Rail

**74344** Solid Rail

Adjustable tow bar folds closed for easy storage



**TOW BAR CHAINS 5000 LB CAPACITY**

- Kit Includes:
- 4 - 30-in, 5000 lb chains
  - 4 - 5/16-in Quick Links
  - 4 - U-Bolts and locknuts

Required By Law in Most States

**7024800**

WATCH HOW-TO VIDEOS

**SELECTING THE RIGHT COUPLER**

1. Match coupler capacity to Trailer Capacity
2. Match coupler channel width to trailer tongue width.
3. Match Coupler Capacity to Hitch Ball.

Connect with Confidence



**FAS-LOK® COUPLERS**

Part No.	Finish	Ball Size	Style	Channel Width	Trailer GVW
<b>74338</b>	ZINC	1-7/8-in	Fas-Lok	2-in	2000 lb
<b>74040</b>	ZINC	1-7/8-in	Fas-Lok	2-1/2-in	2000 lb
<b>74783</b>	ZINC	1-7/8-in	Fas-Lok	3-in	2000 lb
<b>74042</b>	ZINC	2-in	Fas-Lok	2-1/2-in	3500 lb
<b>74280</b>	ZINC	2-in	Fas-Lok	3-in	3500 lb

**SECURITY DUAL-FIT COUPLERS**

- KEY-LOK™ Built-In Security Flat Key Design W/Dust Cover
- Welded Protective Lock Housing
- Helps Prevent Trailer Theft
- Includes Dual-Fit Spacers

Part No.	Finish	Ball Size	Style	Channel Widths	Trailer GVW
<b>7005000</b>	ZINC	1-7/8-in	Fas-Lok	2 & 2-1/2-in	2000 lb
<b>7004900</b>	ZINC	2-in	Fas-Lok	2-1/2 & 3-in	3500 lb



KEY-LOK™ DUAL-FIT



**DUAL-FIT FAS-LOK® COUPLERS**

- Dual-Fit Spacers Ensure A Proper Fit for Sizes of Channels
- Tethered Pin Included For Added Safety

Part No.	Finish	Ball Size	Style	Channel Widths	Trailer GVW
<b>7004800</b>	ZINC	1-7/8-in	Fas-Lok	2 & 2-1/2-in	2000 lb
<b>7004700</b>	ZINC	2-in	Fas-Lok	2-1/2 & 3-in	3500 lb



DUAL-FIT



**CLASS I COUPLER REPAIR KIT**  
7479636



**CLASS II COUPLER REPAIR KIT**  
7479736



**COUPLER PIN & CHAIN**  
7050900



**BULLDOG® COUPLERS**

Designed for utility, horse/livestock, cargo, and construction trailer applications, BULLDOG Collar-Lok™ couplers are the strongest in the industry. The BULLDOG design features the only automatic and continuously tight ball fit in the industry. A variety of coupler styles, tongue mounts, and latches allow configurations to match virtually any trailer.


- Easiest to Use.
- Strong in Both Static and Dynamic Loading Conditions.
- Hinged Ball Socket for Easy Hook Up.
- Clear, Visual Indication of Proper Closure.

**BULLDOG® The Standard of Excellence for Couplers**

**BULLDOG® ROUND TUBULAR TONGUE MOUNT COUPLER**

2-1/4-in OD x 1-3/4-in ID, Steel Tubing

Part No.	GTW	Length	Latch	Ball Size	Class
<b>028381</b>	5000 lb	10-3/4-in	High Profile	2-in	III

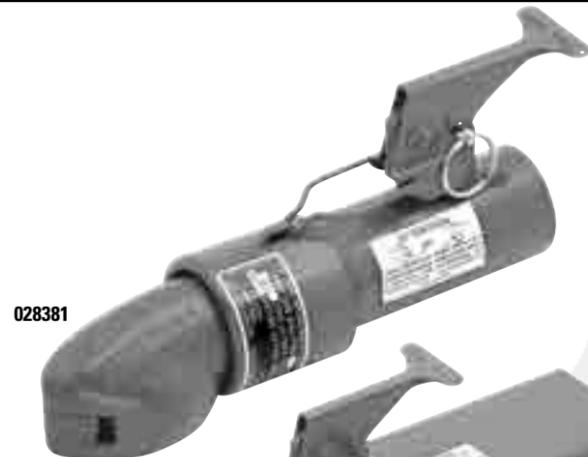

028381

**BULLDOG® 3-IN SQUARE/RECTANGULAR TONGUE MOUNT COUPLERS**

For 3-in Square or Rectangular Trailer Tongue

Part No.	GTW	Length	Latch	Ball Size	Class
<b>02838220</b>	5000 lb	16-1/4-in	High Profile	2-in	III
<b>028244</b>	5000 lb	16-1/4-in	Pin Style	2-in	III
<b>028462</b>	12500 lb	16-1/2-in	High Profile	2-5/16-in	N/A




02838220  
028462

**BULLDOG® 3-IN SQUARE TONGUE MOUNT COUPLER**

High-strength Steel for 3-1/2-in OD Round Trailer Tongue

Part No.	GTW	Length	Latch	Ball Size	Class
<b>028383</b>	5000 lb	16-1/4-in	High Profile	2-in	III

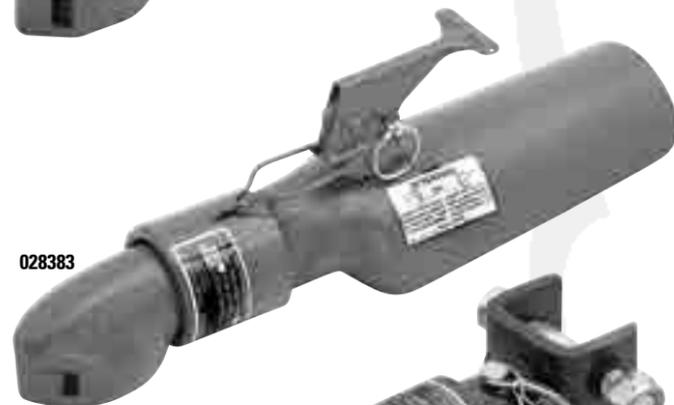

028383

**BULLDOG® ADJUSTABLE CHANNEL MOUNT COUPLERS**

Fits Inside 2-7/8-in Wide Channel

Part No.	GTW	Length	Latch	Ball Size	Class
<b>028390</b>	7000 lb	9-1/2-in	Pin Style	2-in	IV
<b>02863020</b>	12500 lb	10-in	Pin Style	2-5/16-in	N/A



028390  
02863020



**BULLDOG® A-FRAME TONGUE MOUNT COUPLERS**

High-Strength Steel for 50° Trailer Tongue

Part No.	GTW	Length	Latch	Ball Size	Class
<b>028384</b>	5000 lb	16-in	High Profile	2-in	III
<b>02828820</b>	5000 lb	16-in	Low Profile	2-in	III
<b>028386</b>	7000 lb	16-in	High Profile	2-in	IV
<b>02828720</b>	7000 lb	16-in	Low Profile	2-in	IV
<b>02846320</b>	12500 lb	16-1/2-in	High Profile	2-5/16-in	N/A
<b>02838720</b>	7000 lb	16-1/4-in		2-in	N/A




028384

02828820



028386

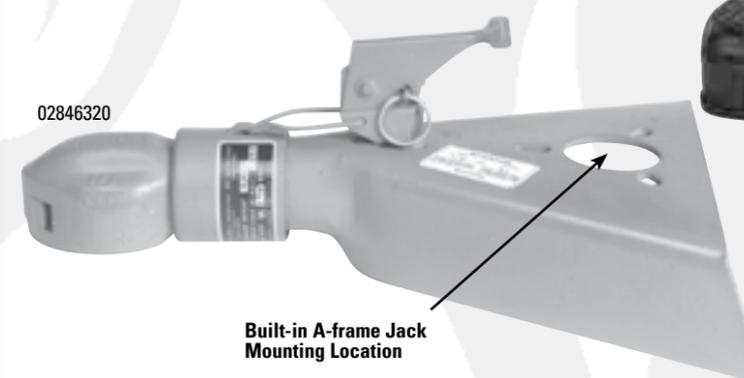

02846320

Built-in A-frame Jack Mounting Location



02828720

**REESE TOWPOWER**

**CLASS III & IV COUPLERS**

Part No.	Finish	Ball Size	Style	Channel Width	Trailer GVW
<b>33305 1360</b>	PRIMER	2-in	Weld-on	A-frame	5000 lb
<b>44305R1360</b>	PRIMER	2-5/16-in	Weld-on	A-frame	10000 lb



33305 1360



**BULLDOG® JACKS**

BULLDOG jacks are tough and trusted, built with uncompromising strength and materials engineered to hold up under rigorous working conditions.

BULLDOG Jacks Are Known For:

- Easy Cranking
- Smooth, Comfortable, Ergonomic Design
- Dependable Vertical and Side Load Capacity
- Proven Reliability For Long Term Use at Rated Loads
- Precision Fitted Parts For Extra Stability

The Bulldog Jack is Characterized by Unmatched Strength, Reliability, Safety & Value



**TOPWIND JACKS**

Part No	Capacity	Description
<b>178151</b>	5000 lb	Round Tube Topwind Jack. 15-in Travel. Weld-on Tubular Mount with 9/16-in Pin and Foot Plate
<b>158486</b>	2000 lb	Round Tube Topwind Jack. 15-in travel. Weld-on Tubular Mount. 5/8-in pin and foot plate.
<b>158451</b>	2000 lb	Topwind Round Swivel Jack. 10-in travel. Weld-on Tubular Mount with 9/16-in pin and foot plate.
<b>158452</b>	2000 lb	Topwind Round Swivel Jack. 15-in travel. Weld-on Tubular Mount with 9/16-in pin and foot plate.
<b>155032</b>	5000 lb	Topwind A-frame Jack. 15-in travel. Weld-on, Bolt-on Bracket. Base not included
<b>155022</b>	2000 lb	Topwind A-frame Jack. 15-in travel. Weld-on, Bolt-on Bracke. Base not included.
<b>151401</b>	2000 lb	Topwind Round Jack. 10-in travel. Weld-on L-bend Swivel Bracket Assembled. Plunger Pin. Base included.



**SIDEWIND JACKS**

Part No	Capacity	Description
<b>178203</b>	5000 lb	Round Tube Sidewind Jack. 15-in Travel. Weld-On Tubular Mount With 5/8-In Pin and Foot Plate.
<b>158109</b>	2000 Lb	Sidewind Round Swivel Jack. 10-in Travel. Weld- On Tubular Mount With 9/16-in Pin & Foot Plate.
<b>158151</b>	2000 lb	Sidewind Round Tube Mount Jack. 15-in Travel. 9/16-in Dia. Pull Pin. Includes Foot & Mount Plates.
<b>151101</b>	2000 lb	Sidewind Round Tube Weld-On L-Bend Mount. with 1/2-in pin and foot plate.


**SQUARE TUBE DIRECT WELD JACKS**

Part No	Capacity	Description
<b>190754</b>	8000 lb	Square Tube Direct Weld Jack. Sidewind Crank. 15-in Travel. Drop Leg With Heavy-Duty Base, Provides 13.5-in Of Additional Adjustment.
<b>190704</b>	8000 lb	Square Tube Direct Weld Jack. Topwind Crank. 15-in Travel. Drop Leg With Heavy-Duty Base, Provides 13.5-in of Additional Adjustment.
<b>182800NH</b>	12000 lb	Square Tube Jack. Direct Weld With Spring Return 12.5-in Travel. Drop Leg With Standard Disc Foot Provides 13.5-in of Additional Extension. Handle Sold Separately.



**TRAILER JACK  
SIDE WIND CRANKS**

- 500105** For 170 Series Jacks
- 500171** For 190 Series jacks

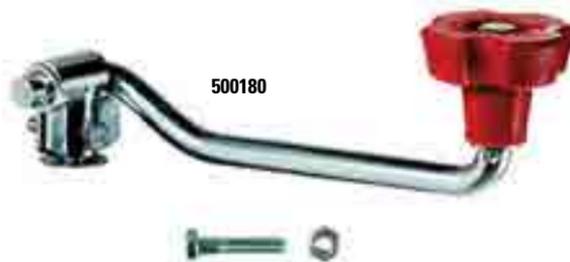

**TRAILER JACK  
TOP WIND CRANK ASSEMBLY**

- With Red Knob
- 1/4-20 x 1.25-in Bolt, 1/4-20 Nut
- Used on 150, 160 & 170 Series Jacks

**500180**



**TRAILER JACK  
REMOVABLE FOOT PLATE**

- Fits 2-in Inner Tube
- Includes Latching Pin. Zinc Finish
- For 150, 170 & EA2000 Jacks

**500244**



**TRAILER JACK  
CASTER ASSEMBLY**

- 6-in Polyolefin Wheel
- 3/8-in Diameter Pin
- Removable Caster
- Rust-Resistant Zinc Finish
- For 150 series A-frame jacks

**500245**



Top Wind for Easier Operation. Side Wind for Quick Up & Down.



**DUAL WHEEL  
BOLT ON  
SWIVEL MOUNT  
SWING AWAY  
TRAILER JACK**

- 10-in Travel, 22.7-in Total Extension
- 1000 lb Capacity
- Fits up to 3-in x 5-in Trailer Tongues
- Snap Ring Swivel
- Zinc Finish

**7042900**

**BOLT ON  
SWIVEL MOUNT  
TOP WIND JACKS**

- 10-in Travel
- Bolt-On Snap Swivel Mount
- Zinc Finish
- Wire-Grip Knob Handle
- 3/8-in pull Pin

**74412** 6-in Poly Wheel, 600 lb Capacity

**74413** Foot Plate, 1000 lb Capacity

**BOLT ON  
SWIVEL MOUNT  
TRAILER JACK**

- Operates in Seconds With New Pull-Pin Swivel Release
- 1:1 Side Wind Gear Ratio Provides Fast, Easy Jack Operation
- Wire-Cylinder Grip Handle
- 10-In Travel, 6-in Caster - 1000 Lb

**74410**



**TOPWIND JACKS**

Part No	Capacity	Description
<b>74415</b>	2000 lb	Topwind Jack With Foot and Mount Plate. 10-in Travel. 5/8-in Diameter Pull Pin. Weld-on tubular mount
<b>74414</b>	2000 Lb	Topwind Jack With Foot and Weld on L-bend Mount. 10-in Travel. 3/8-in Dia. Pull Pin. Retaining Ring Swivel

**A-FRAME TOP WIND UTILITY JACK**

- Features Rolled Acme Threads & Anti-Friction Thrust Bearings
- High-Strength Tubing
- Primed Inner and Outer Jack Tubes
- Includes Detachable Foot Plate

Part No.	Finish	Handle	Travel	Capacity
<b>74407</b>	Black	Cylinder	14-in	2000 lb

**CASTER WHEEL**

- 6-in x 2-in Reinforced Poly-Wheel
- Provides Easy Roll and Good Ground Support
- Zinc Plated For Corrosion Resistance
- Easily Removed
- Pin and Clip Included
- 1000 Lb (Fits 74404)

**74326**



74326

**2500 LB POWERED A-FRAME JACK**

- 12V DC With Built-In Circuit Breaker
- Connects Directly to Trailer Battery/Wiring
- Easily Mounts to Trailer (Hardware Included)
- Will Accept 500244 Foot Plate

Part No.	Finish	Travel	Capacity
<b>7036400</b>	Black	18-in	2500 lb



7036400



Includes manual crank handle



MARINA COLLECTION WINCHES

- Precision Engineered 2-Way Ratchet
- All-Weather Straps
- Corrosion-Resistant Powder Coat Finish
- Non-Marring Coated Hook

**REESE POWERSPORTS**



MARINA COLLECTION

**1200 LB MARINE WINCH**

- High Performance 4.1:1 Gear Ratio
- Corrosion Resistant Powder Coat Finish
- Precision Engineered 2-Way Ratchet
- Easy Grip Non-Skid Handle
- All Weather 15-ft Strap with Coated Hook

**7064600**



MARINA COLLECTION

**1500 LB MARINE WINCH**

- High Performance 4.1:1 Gear Ratio
- Corrosion Resistant Powder Coat Finish
- Precision Engineered 2-Way Ratchet
- Easy Grip Non-Skid Handle
- All Weather 20-ft Strap with Coated Hook

**7064700**



MARINA COLLECTION

**2000 LB MARINE WINCH**

- High Performance 5:1 Gear Ratio
- Corrosion Resistant Powder Coat Finish
- Precision Engineered 2-Way Ratchet
- Easy Grip Non-Skid Handle
- All Weather 20-ft Strap with Coated Hook

**7064800**

**REESE** POWERSPORTS



**MARINE WINCHES**

- Zinc-Plated Finish for Superior Corrosion Resistance
- Easy-To-Use 2-Way Ratchet with Ergonomic Handle
- High-Performance Gear System

Part No.	Capacity	Speed	Strap Inc.
<b>7019400</b>	600 lb	One	15-ft
<b>74556</b>	1100 lb	One	--
<b>74419</b>	1300 lb	One	--
<b>7016800</b>	1400 lb	One	20-ft
<b>7016900</b>	1500 lb	One	20-ft
<b>7017000</b>	2000 lb	Two	20-ft



**WINCH STRAPS**


- 5500 lb Break Strength, 1833 lb Max. Work Load
- 7017100** 2-in x 15'    **7017200** 2-in x 20'



**MARINE SIDE WIND JACK**

- Heavy-Duty Swivel Mechanism Provides Multiple Jack Positions
- Easy-to-Install
- Corrosion-Resistant Finish

Part No.	Capacity	Wheel Size	Swivel Style
<b>74557</b>	1000 lb	6-in x 1.5-in	Snap Ring



**HEAVY DUTY SPARE TIRE CARRIERS**



- Easy to install, Corrosion-Resistant Zinc-plated finish

Part No.	Style	Fits	Frame Sizes
<b>7016200</b>	Offset	Most 4, 5 and 6 lug wheels	Up to 3-inW x 5-inH
<b>7016300</b>	High Mount	Both 4 and 5 lug wheels	Up to 3-inW x 5-inH
<b>7016400</b>	Economical	8-in to 15-in wheels	Universal
<b>7019200</b>	Locking	8-in to 15-in wheels	Universal

**REESE** POWERSPORTS

**ACCESSORIES**

Part No.	Description	Features
<b>7015300</b>	20-in Upright Roller Guide	For Frames up to 3-in wide by 5-in high
<b>7015400</b>	44-in Upright Boat Guide	Visual Guide
<b>7015500</b>	Adjustable Motor Support Bracket	Transfer Weight From Trailer to Transom
<b>7015600</b>	Motor Support Bracket	Transfer Weight From Trailer To Transom
<b>7016000</b>	Bunk Carpet	Reduces Hull Scratching
<b>7018100</b>	Canoe Loader	Easy For 1 Person To Load
<b>7015900</b>	24-In Walk Ramp	Galvanized Steel Construction

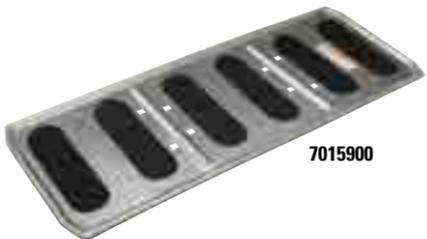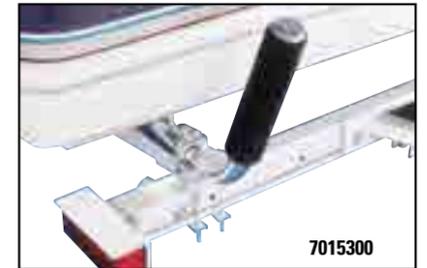



**HOW TO SELECT WINCH PULLING CAPACITY**

Minimum Winch Capacity = Maximum Weight of Boat, Including Motor, Fuel, Gear ÷ 2

Example: Boat + Motor + Fuel + Gear Weight = 2,800 lbs.  
2,800 ÷ 2 = 1,400 lbs.

If shallow water or steep inclined launches are expected to be used ÷ Maximum Weight by 1.5

Example: Boat + Motor + Fuel + Gear Weight = 3,100 lbs.  
3,100 ÷ 1.5 = 2,067 lbs.



**SINGLE SPEED TRAILER WINCHES**

- Includes Comfort Grip Handle For a Positive Hold While Cranking
- Zinc-Plated Finish For Superior Corrosion Resistance
- Full-Length Drum Bushing and Oil Impregnated Shaft Bushing Minimize Maintenance
- High-Carbon Steel Gears to Resist Wear and Last Longer
- Easy-To-Use Two-Way Ratchet

Part No.	Capacity	Gear Ratio	Ratchet Type	Rope	Drum Storage Cable	Strap	Strap Included
<b>74337</b>	600	3.1:1	One-way	36-ft x 1/4-in	N/A	15' x 2-in	NO
<b>74418</b>	1100	4.1:1	Two-way	36-ft x 1/4-in	N/A	15' x 2-in	NO
<b>74419</b>	1300	4.1:1	Two-way	30-ft x 5/16-in	N/A	20' x 2-in	NO
<b>74329</b>	1500	4.1:1	Two-way	20-ft x 5/16-in	N/A	20' x 2-in	YES



**SINGLE SPEED TRAILER WINCHES - BY FULTON®**

Part No.	Capacity	Gear Ratio	Ratchet Type	Rope	Drum Storage Cable	Strap	Strap Included
<b>FW20000101</b>	2000	3.1:1	Two-way	36-ft x 1/4-in	N/A	15-ft x 2-in	YES
<b>T1100Z0101</b>	1100	4.1:1	Two-way	30-ft x 5/16-in	N/A	20-ft x 2-in	YES
<b>T1300 0101</b>	1300	4.1:1	Two-way	30-ft x 5/16-in	N/A	120-ft x 2-in	NO
<b>T1500Z0101</b>	1500	4.1:1	Two-way	20-ft x 5/16-in	N/A	20-ft x 2-in	YES
<b>T1602 0101</b>	1600	5.1:1	Two-way	20-ft x 7/16-in	N/A	20-ft x 2-in	NO
<b>T1801 0101</b>	1800	5.1:1	Two-way	20-ft x 7/16-in	N/A	20-ft x 2-in	NO
<b>T1801Z0101</b>	1800	5.1:1	Two-way	20-ft x 7/16-in	N/A	20-ft x 2-in	YES
<b>XLT14ZB101</b>	1400	4.1:1	Two-way	N/A	N/A	20-ft x 2-in	YES



**TWO-SPEED TRAILER WINCHES**

- 1 Fast Speed for Quick Pull-In and a 2nd Low Speed for Increased Mechanical Advantage
- Includes Comfort Grip Handle for a Positive Hold While Cranking
- Zinc-Plated Finish for Superior Corrosion Resistance
- Full-Length Drum Bushing and Oil Impregnated Shaft Bushing Minimize Maintenance

Part No.	Capacity	Gear Ratios	Rathet Type	Drum Storage	Included
<b>T2005 0101</b>	2000	4.1:1, 9.8:1	2-way w/Neutral	20-ft x 7/16-in Rope	NO
<b>T2005Z0101</b>	2000	4.1:1, 9.8:1	2-way w/Neutral	20-ft x 2-in Strap	YES
<b>T2605 0101</b>	2600	5.1:1, 12.2:1	2-way w/Neutral	24-ft x 7/16-in Rope	NO
<b>T3205 0101</b>	3200	5.1:1	2-way	100-ft x 7/32-in Cable	NO



**TWO-SPEED TRAILER WINCH**

Part No.	Capacity	Gear Ratios	Rathet Type	Drum Storage	Included
<b>74529</b>	1800	4.1:1, 9.8:1	2-way w/Neutral	20-ft x 7/16-in Rope	NO

**2000 LB CAPACITY SINGLE SPEED PORTABLE ELECTRIC WINCH**

- Includes: 29 ft. galvanized steel cable & safety hook, wired remote control, 20-ft Power cable, steel mounting plate, manual hand crank & knob
- Mounts to Hitch Ball for Quick and Easy Temporary Use
  - Permanent Platform Mounting for Trailers, Flatbeds, Trucks and More
  - **CAPACITIES:** 6000 lb-Rolling, 5000 lb-Marine, 2000 lb-Pulling
- 7033600**



Includes: Cable & Hook, Remote Control, Power Cord, Mounting Plate and Manual Crank






**VEHICLE RECOVERY**

When the situation calls for the right tool, accept no substitutes.

Proven Military Design, Engineered for Recovery

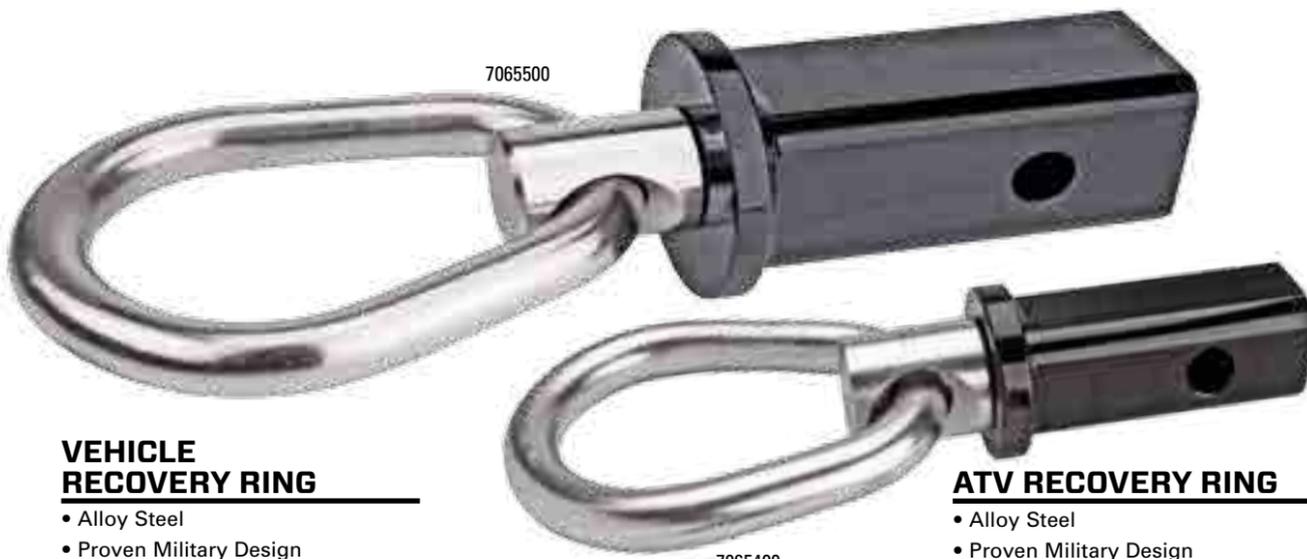

7065500

7065400

**VEHICLE RECOVERY RING**

- Alloy Steel
- Proven Military Design
- 360° Rotation, 180° Pivot
- 13-in Extended Length
- Fits 2-in Receiver Opening
- 10000 lb Gross Capacity
- 5/8-in Hitch Pin Opening

**7065500**

**ATV RECOVERY RING**

- Alloy Steel
- Proven Military Design
- 360° Rotation, 180° Pivot
- 9-in Extended Length
- Fits 1-1/4-in Receiver Opening
- 3500 lb Gross Capacity
- 1/2-in Hitch Pin Opening

**7065400**

**VEHICLE RECOVERY SYSTEM**

System Includes:

- 1 - Vehicle Recovery Ring
- 1 - 20-ft Tow Strap with Loop Ends
- 1 - Reflective Tow Strap Jacket
- 1 - Threaded Towing Shackles
- 1 - Heavy Duty Carrying Case

5500 lb System Capacity  
**7065600**

**ATV RECOVERY SYSTEM**

System Includes:

- 1 - Vehicle Recovery Ring
- 1 - 12-ft Tow Strap with Loop Ends
- 1 - Reflective Tow Strap Jacket
- 1 - Threaded Towing Shackles
- 1 - Heavy Duty Carrying Case


1650 lb System Capacity  
**7068200**



**ATV ACCESSORIES**

Convenient and versatile products for on and OFF the road.

REESE POWERSPORTS

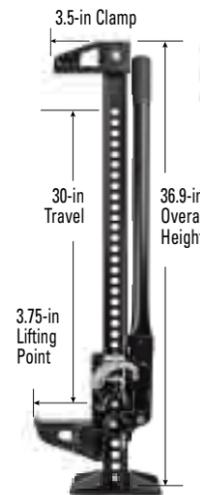

**36-IN ATV/UTV JACK**

- Corrosion resistant powder coat finish
- 34-in handle for superior leverage
- 7000 lb lift capacity

**7064200**

**JACK MAINTENANCE KIT**

- Keeps Jack Operating Trouble Free

Includes: 2 Climbing Pins, 2 Climbing Pin Springs, 2 Cross Pins, 1 handle Pin and Clip

**7064100**



**3-WAY ATV HITCH**

- Fits Most Atvs
- Use A Hitch Ball, 5/8-In Clevis Pin or Tow Hook
- 3/4-in Diameter Ball Shank Hole
- 2000 lb Gross Trailer Weight
- 200 lb Tongue Weight
- Mounting Hardware Included


**7065000**



**3-WAY ATV HITCH**

- Fits Most ATVs
- Use a Hitch Ball, 5/8-in Clevis Pin or Tow Hook
- 3/4-in Diameter Ball Shank Hole
- 2000 Lb Gross Trailer Weight
- 200 lb Tongue Weight
- Mounting Hardware Included

**7065100**





Add Versatility to Your Hitch



**DUAL HITCH EXTENSION**

- Carry Your Bikes While You Tow!
- Great for RV Accessories!
- Fits 2-in Receiver Opening
- 4000 lb Gross Capacity
- 400 lb Tongue Weight

**7060100**



Hook Up a Trailer to Tow Receiver



Or Add a Cargo Tray to Accessories Receiver



Add a Bike Rack to Accessories Receiver



Add a Bike Rack



Add a Cargo Tray



Mounts to Ball Mount Bar

**TOW & GO HITCH STEP**

- Step Up to Reach High Places, Stays In Place While You Tow
- One-Tool Assembly, NO Drilling Required
- Durable High Grade Aluminum Alloy With Black Powder Coat Finish For Extended Durability
- Stainless Steel Fasteners Resist Corrosion
- Adapter Included - Allows Use With All 2-in & 1-1/4-in Ball Mounts
- Slip-Resistant Tread Surface with Raised Edges
- Low Profile Design, Patent Pending

**500 lb CAPACITY**

**7060200**



Low Profile Allows Towing

**LIGHTED HITCH STEP**

- Stays In Place While You Tow
- Ultra Bright L.E.D. Lights
- Great For Added Back-Up Light Or Utility Light
- Mounts to 2-in Ball Mount
- Step to Reach High Places
- Heavy Duty Aluminum

**500 lb CAPACITY**

**7065300**

Available July, 2015





**SPRING LOADED HITCH COVER**


- Fits most 2-in Receiver Openings
  - Stays In Place While You Tow
  - Spring Loaded Cover Keeps Opening Free From Debris
- 7074600**



Just flip down




Slide in ball mount

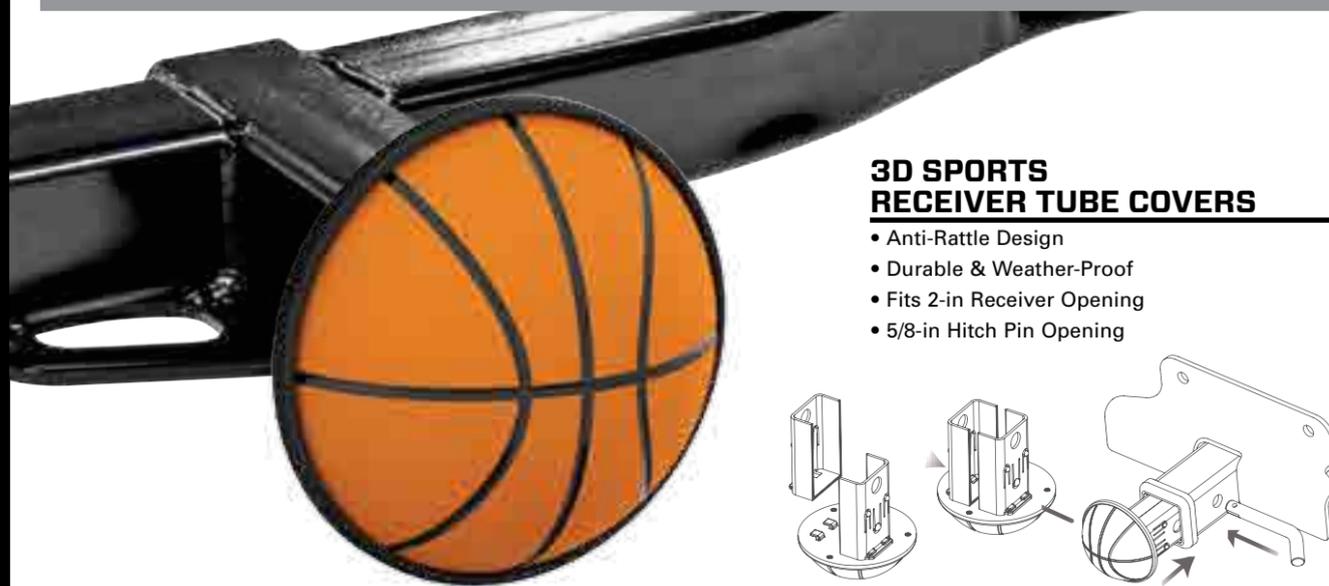

**3D SPORTS RECEIVER TUBE COVERS**

- Anti-Rattle Design
- Durable & Weather-Proof
- Fits 2-in Receiver Opening
- 5/8-in Hitch Pin Opening

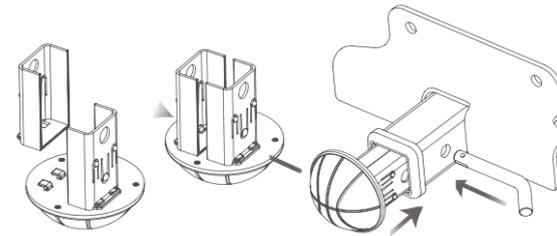

2 Minute Installation - No Tools Required!



**86541**  
Football

**86537**  
Tennis

**86538**  
Soccer

**86539**  
Golf

**86540**  
Baseball

**86536**  
Basketball

**RECEIVER TUBE COVERS - CLASS III / IV**

- 74099** Black Nylon For 2-In
- 74514** Tethered Rubber Hitch Receiver Cover With 4-Way Flat Holder
- 74547** Replacement Receiver Plug For 2-in
- 7000600** Rubber Receiver Plug For 2-in
- 7051500** Rubber Receiver Plug For 1-1/4-in
- 7023100** Distinctive Chrome Collar & Rubber Receiver Plug for 2-in



74099

74514



7051500

7000600

7023100

74547

**HITCH BALL COVER**

- Fits 1-7/8-in and 2-in Hitch Balls
- Includes a 4-Way Flat Wiring Mounting Pocket
- Prolong Life of Hitch Ball
- Prevents Accidental Grease Stains

**7013100**





**DOCK CHOCK**

- Reduces Risk of Trailer Roll
- Fits Most Trailer Wheels
- Durable High Impact Polymer
- Includes Mounting Holes

**7000300**



**WHEEL CHOCKS**

- Reduces Risk Of Trailer Roll
- Fits Trailer Wheels Up To 17-in
- 8.25-in L x 5.75-in H x 6-in W
- High Impact Polymer
- Includes Mounting Holes

**7000100**



**HITCH BALL WRENCH**

- 1-1/8-in & 1-1/2-in Wrench ends
- Fits the most popular hitch ball nut sizes
- 19-in long

**74342**



**HITCH BALL BUSHINGS**

Allows 3/4-in Shank Hitch Balls To Be Used With Ball Mounts With 1-in Shank Holes

- 58109** Reduces from 1-in to 3/4-in
- 72800** Reduces from 1-in to 3/4-in - for InterLock™ Ball Mounts
- 58184** Reduces from 1-1/4-in-in to 1-in Perfect for Class V hitch users

**WHEEL BEARING PROTECTORS & KITS**

- Permits Easy Lubrication for Longer Life
- Keeps Water and Dirt Out
- Easy to Install

- 72790** Wheel Bearing Kit - 1-1/4-in - Single
- 72791** Wheel Bearing Kit - 1-in - Single
- 74176** Wheel Bearing Protector Set - 1.781-in dia. Hub
- 74177** Wheel Bearing Protector Set - 1.980-in dia. Hub
- 7036700** Wheel Bearing Protector Set - 2.328-in dia. Hub



**STEP BUMPER RECEIVER**

- Accepts 2-in Hitch Bars
- Tongue Weight 350 Lb; GTW 3500 lb
- Class II (Not For Use With Weight-Distributing Equipment)

**81378**



**HITCH BALL LUBRICANT**

- Water Resistant
- Reduces Coupler and Ball Wear
- Helps Fights Corrosion
- Pack - Single Dose Hitch Ball Lubricant

**7057900**





**DUAL VIEW CLIP-ON TOWING MIRROR**

- Fully Adjustable Dual Mirrors Maximize Vision
- Adjustable Security Straps Are Non Marring
- Aerodynamic Design That Adjusts To Fit Existing Mirror
- Attaches To Mirror In Seconds

**7034200**




Non marring adjustable security straps



**CLIP-ON TOWING MIRROR**

- Arms Adjust To Fit Many Applications
- Mirror Head Is Fully Adjustable
- Attached In Seconds
- Extends View By Up To 7 Inches

**72787**

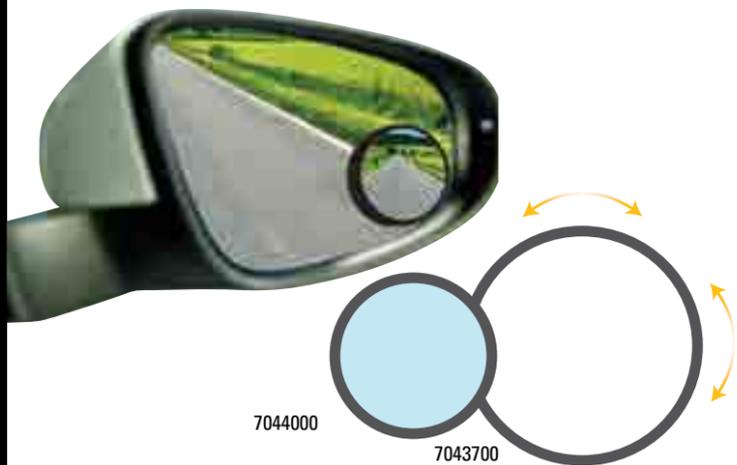

**ADHESIVE BACK WIDE-ANGLE MIRRORS**

- Wide-Angle Convex Mirror With Mounting Tape
- Easy Installation
- Helps Reduce Dangerous Blind Spots

**7043700** 3-in Diameter, 2-Pack, Adjustable

**7044000** 2-in Diameter, 2-Pack, Tinted



**SOLOHITCH™ ALIGNMENT SYSTEM**

- Convenient One Person Hitch Alignment System
- Magnetic Base For Fast Easy Location
- Rods Adjust Up to 42-in
- Align Trailer and Hitch On First Attempt

**7012900**

**CHAIN HOISTS**

- 360° Forged Swivel Hooks
- Mechanical Safety Brake
- Protective Steel Housing
- Portable - Indoor or Outdoor

**Heavy Duty, Portable**

**1 TON CHAIN HOIST**

- 2000-lb Lifting Capacity
- 10-ft Lift, 8.5-ft Pull Chain

**7067300**

**3 TON CHAIN HOIST**

- 6000-lb Lifting Capacity
- 10-ft Lift 8.5-ft Pull Chain

**7067400**





Heavy Duty Farm Jacks. Dependable when needed.



Moving Heavy Equipment Just Got Easier



**FARM JACKS**

- Long 36-in Handle For Ease of Use
- Removable Handle and Clamp
- 54-in Farm Jack includes 7061500 Handle Holder

Part No.	Height	Finish	Handle	Travel	Capacity
<b>7060900</b>	54-in	Black	36-in	48-in	8000 lb
<b>7033400</b>	48-in	Red/Black	36-in	42-in	7000 lb

**36-IN ATV/UTV JACK**

**7064200** 7000 lb Capacity, see page 71

**FARM JACK ACCESSORIES**

Part No.	Description
<b>7048400</b>	Farm Jack Foot Plate, 10-in x 10-in, 7000 lb Capacity
<b>7061500</b>	Handle Holder - Durable PVC, Eliminates Rattle
<b>7064100</b>	Farm Jack Maintenance Kit

7033400

7060900  
Includes 7061500 Handle Holder



7048400



7061500

7064100



7034100

**STEEL CABLE PULLERS**

- Heavy Duty Zinc Plated Steel Construction
- Dual Ratchet Drive
- Drop-Forged Steel Hooks with Spring Action Safety Latches
- Non-Slip Rubber Handle Increases Gripping Power
- Hand Crank Ratchet Provides Powerful Pulling
- Galvanized Self-Aligning Cable Minimizes Wear & Tear

**7034100** 2 Ton, 6 ft Cable

**7067000** 2.5 Ton, 8 ft Cable



7067000



**THE LEADER IN AUTOMOTIVE TOWING  
AND CARGO SECURING PRODUCTS**



**REESE EXPLORE    REESE SECURE    REESE TOWPOWER**

Cequent Consumer Products, Inc.  
29000-2 Aurora Road Solon, OH 44139  
**ReeseBrands.com**  
1-440-498-0001