



Schlage Architectural Guide

Product warranties — commercial applications

Limited Warranty

Schlage Lock Company (the “Company”) warrants to the original purchaser the products manufactured by it (the “Product”) to be free of defects in material and workmanship. Provided: (i) The Company has been notified within one year of purchase date and been given the opportunity of inspection by return of any alleged defective Product to the Company, or its authorized distributor, at the address specified here, free and clear of all liens and encumbrances, transportation prepaid, accompanied by the statement of defects and proof of purchase; and (ii) the Product has not been modified, abused, misused, or improperly installed, maintained, and/or repaired during such period; and (iii) such defect has not been caused by corrosion or ordinary wear and tear.

Exception: The company will not warrant ANSI A156.2 Grade 2 key-in-lever Product (AL and S-Series) installed on educational facilities.

Product warranties - residential applications

Lifetime Mechanical Warranty

Schlage Lock Company (“Schlage”) extends a Full Lifetime Mechanical Warranty to the original user (“User”) of Schlage products (“Products”) against defects in material and workmanship as long as the User occupies the residential premises upon which the Product was originally installed. This warranty DOES NOT COVER: (i) product finish, (ii) abused or misused Products, or (iii) Products used in commercial applications. Upon return of a defective Product to Schlage, Schlage shall either replace or repair the Product or refund the purchase price in exchange for the Product.

10-Year Durable Finish Warranty

Schlage Lock Company (“Schlage”) extends a full 10-year warranty to the original user (“User”) of Schlage’s 10-Year Durable Finish (“Product”) in brass (finish codes 605 and 609) and chrome (finish codes 625 and 626) finishes against tarnishing as long as the User occupies the residential premises upon which the product was originally installed. This warranty DOES NOT COVER: (i) scratches or abrasions, (ii) abused or misused Products, or (iii) Products used in commercial applications. Upon return of a defective product to Schlage, Schlage shall either replace or repair the Product or refund the purchase price in exchange for the Product.

Ultima™ Lifetime Anti-Tarnish Finish (505) Warranty

Schlage Lock Company (“Schlage”) extends a Full Lifetime warranty to the original user (“User”) of Schlage Lock ULTIMA™ Finish (“Product”) against tarnishing as long as the User occupies the residential premises upon which the Product was originally installed. This warranty DOES NOT COVER (i) scratches or abrasions, (ii) abused or misused Products, or (iii) Products used in commercial applications. Upon return of a defective Product to Schlage, Schlage shall either replace or repair the Product or refund the purchase price in exchange for the Product.

Product warranties, additional terms and conditions - commercial and residential applications

The company makes no other warranty, and all implied warranties including any warranty of merchantability or fitness for a particular purpose are limited to the duration of the expressed warranty period as set forth above. The company's maximum liability hereunder is limited to the purchase price of the product. In no event shall the company be liable for any consequential damages of any nature arising from the sale or use of this product, whether in contract, tort, strict liability, or otherwise.

Note: Should the Product be considered a consumer product as may be covered by the Magnusson Moss Federal Warranty Act, please be advised that: (1) some states do not allow limitations on incidental consequential damages or how long an implied warranty lasts so that the above limitations may not fully apply; (2) this warranty gives specific legal rights, and a buyer may also have other rights which may vary from state to state. For warranty service and shipping instructions, contact the Schlage Lock Company.

The Schlage Lock Company reserves the right to make changes in designs and specifications or to make additions or improvements on its products without notice and without incurring any obligation to incorporate them on products previously manufactured. The Schlage Lock Company is not responsible for any modification, addition or alteration to our products by others.

Artisan Series Lifetime Finishes Warranty (613, 619, 620, and 625 Finishes)

The Company extends a Full Lifetime warranty to the original User of Artisan Series Lifetime Finish™ (“Product”) against tarnishing as long as the User occupies the residential premises upon which the Product was originally installed. Oil-Rubbed Bronze (613) finish is designed to improve over time and change in appearance, creating a living finish through daily use.



Top Notch Distributors, Inc.

East – Pennsylvania
800-233-4210
Fax 800-854-4146

Midwest – Missouri
800-211-4607
Fax 800-211-4608

Southwest – Texas
866-693-6903
Fax 866-693-6904

West – Nevada
800-722-4210
Fax 800-248-3620

www.topnotchinc.com

sales@topnotchinc.com



Finishes

Schlage finishes are durable, top-quality finishes obtained by the careful processing of solid brass, bronze, stainless steel, or other materials. Where required, a protective clear coating is electrostatically applied and cured under high temperature. It is important that climatic conditions and usage be taken under consideration when selecting finishes. This is especially true in areas subjected to strong corrosive vapors, humid climate or sea air, which, in a short time, may have a damaging effect on metal finishes.

The longevity and preservation of the finish appearance is determined by base metal and finishing process. Clear protective coating or other organic finishing applications may require different methods of cleaning and care.

As an example, non-clear coated finishes should not be cleaned with soaps or any solvents; organically coated surfaces should periodically be cleaned with a mild, non-abrasive soap and buffed lightly with a clean cloth. The type of base metal and finishing techniques must be considered when applying any cleaning or preservative method. Contact the Schlage Customer Service Department for further information on the care of finished hardware.

In some instances, for customer convenience, the most appropriate BHMA (Builders Hardware Manufacturers Association) finish symbols are used to indicate appearance, regardless of base metal or finishing process. A, AL, D, DE, F, H, S, and **S200-SERIES** levers are zinc-based material and are plated to match finishes indicated. Finish numbers in the **600-SERIES** are the BHMA industry standard. The nearest old U.S.-equivalent code designations are shown in parentheses.

Ultima™ (505) finish

Backed by a Lifetime Finish Warranty for residential applications.

The patented, environmentally safe Ultima™ process prevents tarnishing and protects against corrosives like salt, sun, cleaning products, and pool chemicals, making it ideal for even the harshest environments.

10-year durable finish

The Schlage 10-Year Durable Finish puts an end to customer complaints and call-backs concerning brass hardware. Entrance handlesets, knobs, levers, and deadbolts retain all of their original beauty and luster — they appear ageless.

The 10-Year Durable Finish Warranty is offered on all brass and chrome finishes for residential applications as long as the user occupies the residential premises upon which the product was originally installed.

See Product Warranties section for additional information regarding ULTIMA™ 505 Finish and 10-Year Durable Finish.

Finish	No.	U.S. Finish	Description
505	—	Bright brass	ULTIMA™ finish
605	3	Bright brass	Clear coated
606	4	Satin brass	Clear coated
609	5	Satin brass, blackened	Satin relieved, clear coated
612	10	Satin bronze	Clear coated
613	10B	Oil-rubbed bronze	Oxidized satin bronze, oil rubbed, no coating
619	15	Satin nickel	Clear coated
620	15A	Antique pewter	No coating
622	—	Matte Black	Flat black coated
625	26	Bright chromium plated	No coating
626	26D	Satin chromium plated	No coating
629	32	Bright stainless steel	No coating
630	32D	Satin stainless steel	No coating
716	—	Aged bronze	





A Series — Knobs

HEAVY-DUTY RESIDENTIAL & MEDIUM-DUTY COMMERCIAL LOCKS


Specifications

- Applications:** Heavy-duty residential, light- and medium-duty commercial.
- Certifications:** ANSI A156.2, 1996, **Series 4000** Grade 2. (Formerly FF-H-106C **Series 160.**) U.L./cU.L.-listed for all functions up to three hours.
- Exposed trim:** Wrought brass, bronze or stainless steel. Lever is zinc based, plated to match BHMA symbols.
- Keying:** 6-pin tumbler with two nickel silver keys per lock. Stock locks are keyed 5 pin. Other keying options available from the factory include masterkeying, grandmasterkeying, construction keying, and interchangeable core. Also available with Primus® high-security cylinders and Everest™ patent protected keying system.
- Door range:** 1³/₈" to 1⁷/₈" (35 mm-48 mm) standard. 2" to 2¹/₂" doors extended inside, regular parts assembled to order.
- Backset:** 2³/₈" (60 mm) standard. 2³/₄" (70 mm) and 3³/₄" (95 mm) backset latches available. 5" (127 mm) backset links available.


Standard features

- Cylindrical lock housing; cold-rolled steel, corrosion treated for normal atmospheric conditions.
- Key-removable outside knobs for easy cylinder replacement.
- Solid brass 6-pin cylinders.
- No exposed mounting screws.
- Meets or exceeds 400,000-cycle ANSI Grade 2 requirements.


GEORGIAN

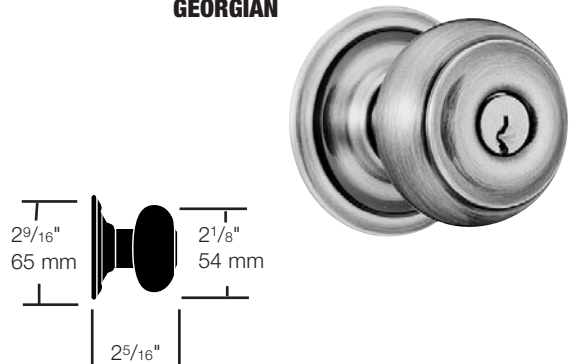

ORBIT

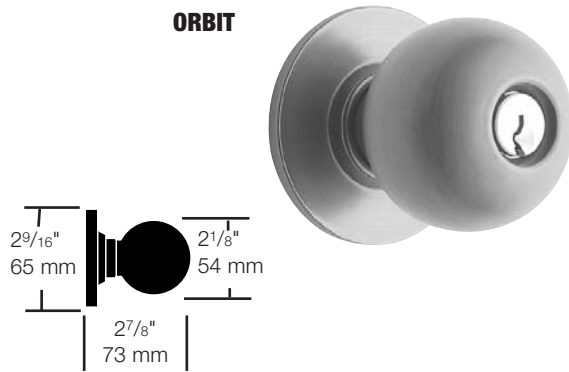

PLYMOUTH

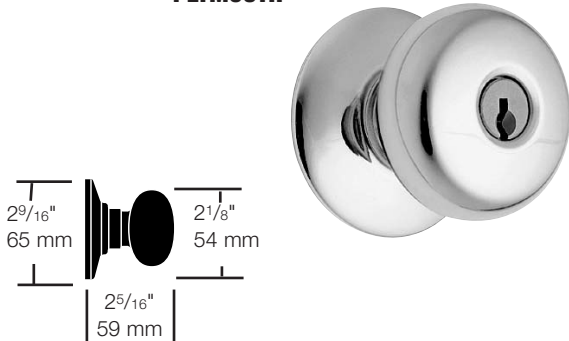

Top Notch Distributors, Inc.

East – Pennsylvania
800-233-4210
Fax 800-854-4146

Midwest – Missouri
800-211-4607
Fax 800-211-4608

Southwest – Texas
866-693-6903
Fax 866-693-6904

West – Nevada
800-722-4210
Fax 800-248-3620

www.topnotchinc.com

sales@topnotchinc.com



A Series — Knob/Lever


HEAVY-DUTY RESIDENTIAL & MEDIUM-DUTY COMMERCIAL LATCHES & STRIKES

Standard latches and strikes have adjustable brass or bronze faceplates, furnished in compatible lock trim finishes.


Latches: 1" x 2¹/₄" (25 mm x 57 mm), 1/2" (13 mm) throw standard. 1¹/₈" (29 mm) wide faceplates available. Circular drive-in, 1/4" (6 mm) radius round-corner springlatches and deadlatches are also available.

Strikes: Square-corner, 1¹/₈" x 2³/₄" x 3/32" (29 mm x 70 mm x 2 mm) T-strike with 1¹/₈" (29 mm) lip, furnished with dust box, standard. Optional lip lengths 1" through 2" (25 mm-51 mm) available. ANSI 1¹/₄" x 4⁷/₈" (32 mm x 124 mm) strike, 1³/₁₆" (30 mm) lip available.

TULIP

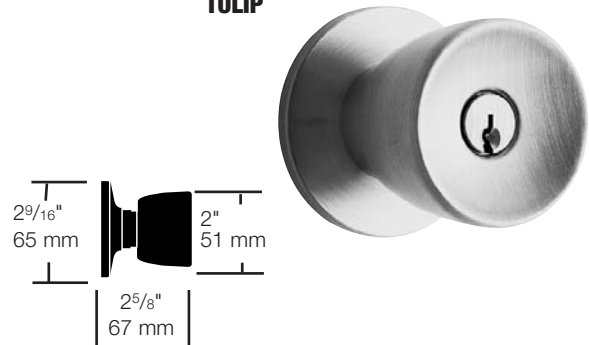


LEVON

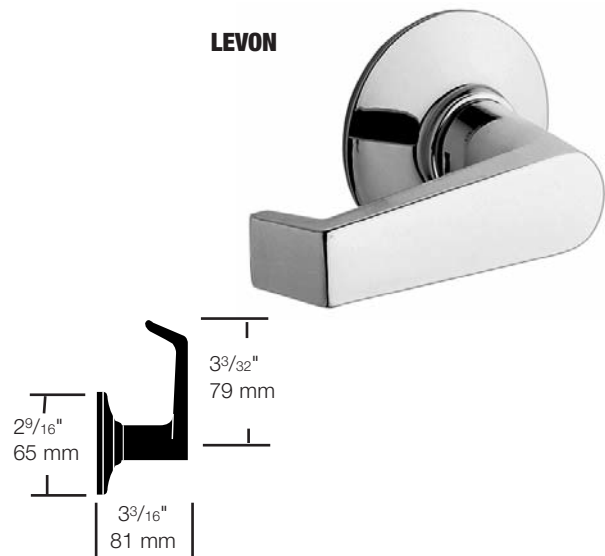

Door preparation

See templates.

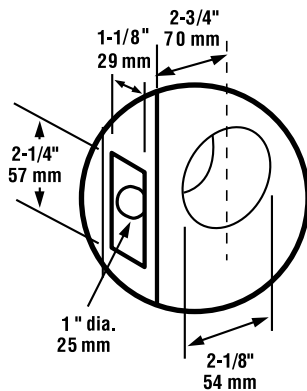

Finishes

Lever	605	606	609	612	613	625	626	630
LEVON	•			•	•		•	

Knobs

GEORGIAN	•		•					
ORBIT	•	•		•	•	•	•	
PLYMOUTH	•			•	•		•	•
TULIP	•						•	



East – Pennsylvania
800-233-4210
Fax 800-854-4146












Midwest – Missouri
800-211-4607
Fax 800-211-4608

Southwest – Texas
866-693-6903
Fax 866-693-6904

West – Nevada
800-722-4210
Fax 800-248-3620

A Series — Functions

ANSI A156.2, 1996, SERIES 4000 NON-KEYED LOCKS

SCHLAGE	ANSI		Description
A10S	F75		Passage Latch Both knobs always unlocked.
A25D			Exit Lock Blank plate outside. Inside knob always unlocked. Specify door thickness, 1 ³ / ₈ " (35 mm) or 1 ³ / ₄ " (44 mm).
A30D	F77		Patio Lock Pushbutton locking. Turning inside knob releases button. Closing door on A-SERIES also releases button. (A-SERIES lever available inside only).
A40S	F76		Bath/Bedroom Privacy Lock Pushbutton locking. Can be opened from outside with a small tool. Turning inside knob releases pushbutton. Closing door on all also releases button.
A43D	F79		Communicating Lock Turn-button in outer knob locks and unlocks knob and inside thumbturn.
A170			Single Dummy Trim Single dummy trim for one side of door. Used for door pull or as matching inactive trim.
A53PD	F82		Entrance Lock Turn/pushbutton locking: pushing and turning button locks outside knob requiring use of key until button is manually unlocked. Pushbutton locking: pushing button locks outside knob until unlocked by key or by turning inside knob.
A70PD	F84		Classroom Lock Outside knob locked and unlocked by key. Inside knob always unlocked.
A79PD			Communicating Lock Locked or unlocked by key from outside. Blank plate inside.
A80PD	F86		Storeroom Lock Outside knob fixed. Entrance by key only. Inside knob always unlocked.
A85PD	F93		Hotel/Motel Lock Outside knob fixed. Entrance by key only. Pushbutton in inside knob activates visual occupancy indicator, allowing only emergency masterkey to operate. Rotation of inside spanner button provides lockout feature by keeping indicator thrown.

A/AL Series — Latches

Latch options

Specify

Springlatch	Deadlatch	Backset	Description	Finishes
11-068†	11-085†	2 ³ / ₈ "	Square corner, 1" x 2 ¹ / ₄ ", standard	605, 612, 613, 626
11-069	11-088	2 ³ / ₈ "	1/4" radius round corner, 1" x 2 ¹ / ₄ "	605, 612, 613, 626
11-110	11-104	2 ³ / ₈ "	Circular, drive-in, 605 and 626 finish only	605, 626
11-111	11-091	2 ³ / ₄ "	Square corner, 1" x 2 ¹ / ₄ "	605, 612, 613, 626
11-112	11-092	2 ³ / ₄ "	1/4" radius round corner, 1" x 2 ¹ / ₄ "	605, 612, 613, 626
11-116	11-096	2 ³ / ₄ "	Square corner, 1 ¹ / ₈ " x 2 ¹ / ₄ ", standard for 2 ³ / ₄ " backset	605, 612, 613, 626,
11-113	11-105	2 ³ / ₄ "	Circular, drive-in	605, 626
11-118	11-103	3 ³ / ₄ "	Square corner, 1 ¹ / ₈ " x 2 ¹ / ₄ "	605, 612, 613, 626
41-005*		5"	Backset extension link	
A501-878**		—	Latch front adapter	
37-001***			Reinforcement Kit	
A501-567			Reinforcement sleeve	
A501-566			Reinforcement for 1 ³ / ₄ " doors	
A501-565			Reinforcement for 1 ³ / ₈ " doors	

* Backset extension link **41-005** must be used with 2³/₈" backset latches. Link **41-005** requires reinforcement when used in metal doors. Link **41-005** installed in 1" latch holes require one G506-815 sleeve. Links for backsets over 5" are sold as parts.





** Used to convert 1" wide square front faceplates for 1¹/₈" wide door preparations. Furnished in black plastic. Order in units of 100 each.

*** Reinforcing unit is used to reinforce and help prevent the collapse of hollow metal doors when locksets are tightly mounted. This kit should be used with long backsets for A-Series lock installations in hollow metal doors to prevent lateral movement of the latchbolt. Specify door thickness.


SQUARE CORNER LATCHES

Springlatch

Deadlatch





G506-815




ROUND CORNER LATCHES

Springlatch

Deadlatch





A501-878




DRIVE-IN LATCHES

Springlatch


Deadlatch



A501-566 / A501-565



A501-567



A/AL Series — Strikes


Strike options

Specify	Description	Lip Length	Finishes
10-001†	Square corner T-strike, box, 1 1/8" x 2 3/4" standard	1 1/8"	605, 612, 613, 619, 626
10-001	Square corner T-strike, box, 1 1/8" x 2 3/4"	1", 1 1/4", 1 1/2", 1 3/4", 2"	605, 612, 613, 619, 626
10-004	1/4" radius round corner, T-strike, box, 1 1/8" x 2 3/4"	1 1/8"	605, 612, 613, 619, 626
10-025	ANSI, no box, 1 1/4" x 4 7/8"	1 3/16" or 1 3/8"	605, 606, 612, 613, 619, 625, 626
K510-066	Box for ANSI strike, must be specified	—	n/a
10-026	Square corner, full lip, no box, 1 5/8" x 2 1/4"	1 1/8"	605, 609, 612, 613, 619, 620, 626
10-027	1/4" Radius round corner, full lip, no box, 1 5/8" x 2 1/4"	1 1/8"	605, 609, 612, 613, 619, 620, 626
10-058	Circular, adjustable, 1 3/4" diameter, 605 and 626 finish only	1 7/32"	605, 609, 612, 613, 619, 620, 626
39-030**	Rabbeted latch and strike kit,		605, 626

Notes: 1) Electric strike (**10-042**) is available as a part.
2) Strikes with long lip lengths are sold as parts.

† Indicates standard components and are furnished with locks unless otherwise specified.

** This kit adapts square corner latches and 2 3/4" high square corner strikes to 1/2" rabbeted door and frame preparations.

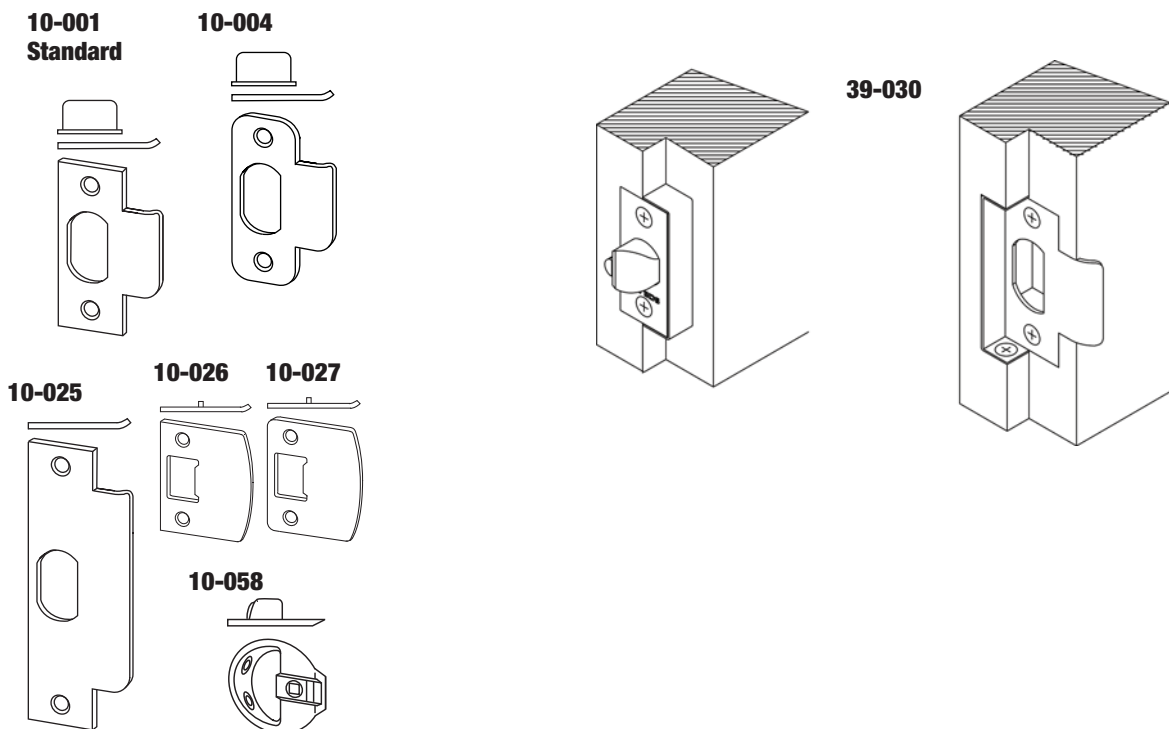

Top Notch Distributors, Inc.

East – Pennsylvania
800-233-4210
Fax 800-854-4146

Midwest – Missouri
800-211-4607
Fax 800-211-4608

Southwest – Texas
866-693-6903
Fax 866-693-6904

West – Nevada
800-722-4210
Fax 800-248-3620

www.topnotchinc.com

sales@topnotchinc.com



A Series — Parts

Miscellaneous Parts

Part Number	Specify Finish	Description
A201-330	•	Non-Threaded chassis, less knob & rose - A170
A201-370		Cam & driver - A80
A201-377		Mounting plate, ins. (except A43, A79)
A201-399	•	Hub & cap, out. (except A10, A25, A40, A43)
A201-406	•	Hub & cap, out. - A10, A40, A43
A201-558	•	Rose, out. - A25
A201-688	•	Turn unit, ins. - A43
A301-386*		Spindle & catch, ins. (except A43, A70)
A301-387		Spindle & catch, out. (except A25, A43)
A301-391*		Cam unit - A30
A301-402		Cam unit, out. - A40, A53, A85
A301-403	•	Housing & cap, 1 ³ / ₈ " thru 1 ⁷ / ₈ " door (except A43, A79)
A301-404	•	Housing & cap, 1 ⁷ / ₈ " thru 2 ¹ / ₄ " door, EI (except A43, A79)
A301-405	•	Housing & cap, 2 ¹ / ₄ " thru 2 ¹ / ₂ " door, EI (except A43, A79)
A301-406	•	Threaded housing & cap ins. (except A43, A79)
A301-409*		Spindle, 1 ⁷ / ₈ " thru 2 ¹ / ₄ " door, EL (except A43, A79)
A301-410*		Spindle, 2 ¹ / ₄ " thru 2 ¹ / ₂ " door, EL (except A43, A79)
A500-001		Spindle, ins., 2" thru 2 ¹ / ₄ " door, EL - A43

* Parts that are not directly interchangeable with **MA45** parts.

** Parts that require frame **A508-598**.

Note: Parts listed for **A-Series** locks manufactured since 1984, identified as **MA84**. All parts except those noted are interchangeable for lock parts manufactured before 1984, identified as **MA45**.

Miscellaneous Parts

Part Number	Specify Finish	Description
A500-002		Spindle, ins., 2 ¹ / ₂ " door, EL - A43
A501-167		Threaded rod for mounting A170s as double dummy set
A501-305		Hub plate, ins. (except A79)
A501-498		Hub, 1 ³ / ₈ " door - A25
A501-499		Hub, 1 ³ / ₄ " door - A25
A501-615		Spindle wedge - A80, A85
A501-633		Spindle, ins. - A43
A501-633		Swivel sleeve - A85 (except ORB design)
A501-721		Cam plug - A70
A501-766	•	Rose, ins. - A79
A501-767		Mounting plate - A79
A501-768		Hub plate, ins. - A79
A501-776		Spiral cam - A70
A501-791		Cam & plug spacer - A70
A501-874		Hub plate, out. - A25
A501-901		Plate, out. - A80, A85
A508-399		Plate, out (except A25, A80, A85)
A508-597**		Spring separator (except A10, A25, A40, A43)

Plunger Units

Part Number	Specify Finish	Description	Finishes
01-056	•	Plunger unit, ins. - A30	605, 612, 613, 626
01-057	•	Plunger unit, ins. - A40	605, 612, 613, 626
01-060	•	Plunger unit, ins. - A53	605, 612, 613, 626



AL Series — Levers

HEAVY-DUTY RESIDENTIAL & STANDARD-DUTY COMMERCIAL LOCKS

Specifications


- Applications:** Standard-duty commercial exterior and interior doors for medical, office, hotel/motel, public buildings, religious, multi-family, retail/storefront, and government facilities. Also available for heavy-duty residential use.
- Certifications:** ANSI A156.2, 1996, **Series 4000** Grade 2. U.L./cU.L.-listed for all functions up to three-hour doors.
- Exposed trim:** Wrought brass or bronze. Levers are pressure-cast zinc, plated to match finish symbols.
- Keying:** 6-pin tumbler with two nickel silver keys per lock. Stock locks are keyed 5 pin. Other keying options available from the factory include masterkeying, grandmasterkeying and construction keying. Interchangeable core available in Saturn design only. Also available with Primus™ high-security cylinders and Everest™ patent protected keying system.
- Door range:** 1³/₈" to 1⁷/₈" (35 mm-48 mm) standard. 1⁷/₈" to 2" (48 mm-51 mm) regular parts assembled to order.
- Backset:** 2³/₄" (70 mm) standard. 2³/₈" (60 mm) and 3³/₄" (95 mm) backset latches available. 5" (127 mm) backset links also available.

Standard Features


- Exceeds all ANSI A156.2, 1996, **Series 4000** Grade 2 strength and operational requirements including 400,000-cycle testing.
- True thru-bolting of door prevents lock chassis rotation and disengagement from latch.
- Stainless steel interlocking spindle design for added strength against excess force when lever is in locked position or latch has been fully retracted.
- Cold-rolled steel, machined, threaded hubs, and locking nuts prevent loosening of the lockset by bolting chassis to the door.
- Heavy-duty compression springs extend life of spring cage, minimize droop, and provide smooth, fast return action of levers.
- Patented door range adjuster allows quick and easy adjustment of the **AL-SERIES** for 1³/₈" to 1⁷/₈" (35 mm-48 mm) thick doors.




JUPITER

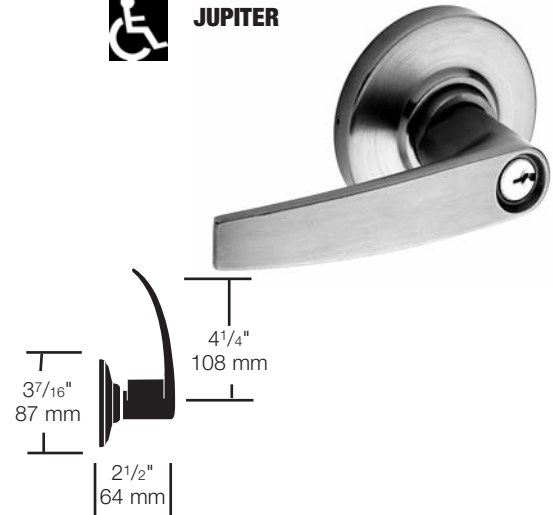

NEPTUNE

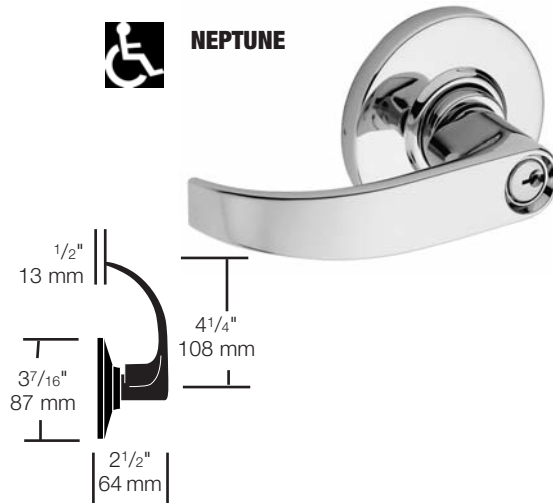

SATURN

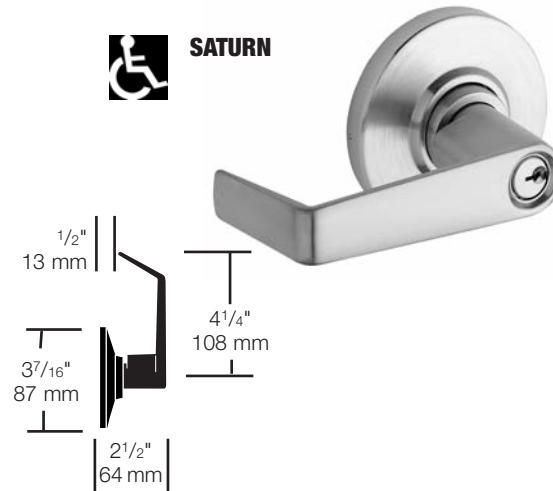

Top Notch Distributors, Inc.

East – Pennsylvania
800-233-4210
Fax 800-854-4146

Midwest – Missouri
800-211-4607
Fax 800-211-4608

Southwest – Texas
866-693-6903
Fax 866-693-6904

West – Nevada
800-722-4210
Fax 800-248-3620

www.topnotchinc.com

sales@topnotchinc.com



AL Series — Levers

HEAVY-DUTY RESIDENTIAL & STANDARD-DUTY COMMERCIAL LATCHES & STRIKES


Standard latches and strikes have adjustable brass or bronze faceplates, furnished in compatible lock trim finishes.

Latches: 1¹/₈" x 2¹/₄" (29 mm x 57 mm), 1¹/₂" (13 mm) throw standard. 1" (25 mm) wide faceplates available. Circular drive-in, 1¹/₄" (6 mm) radius round-corner springlatches and deadlatches are also available.


Strikes: ANSI 1¹/₄" x 4⁷/₈" (32 mm x 124 mm) strike, 1³/₁₆" (30 mm) lip standard. Square-corner, 1¹/₈" x 2³/₄" x 3³/₃₂" (29 mm x 70 mm x 2 mm) T-strike with 1¹/₈" (29 mm) lip, furnished with dust box, available. Optional lip lengths 1" through 2" (25 mm-51 mm) available.



OMEGA



Door preparation

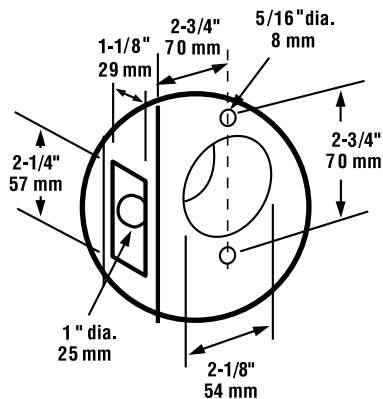

See templates.

Finishes

Lever	605	606	609	612	613	619	625	626
JUPITER	•	•		•	•	•	•	•
NEPTUNE	•	•		•	•	•	•	•
SATURN	•	•	•	•	•	•	•	•
OMEGA	•	•		•	•	•	•	•



Top Notch Distributors, Inc.

East – Pennsylvania
800-233-4210
Fax 800-854-4146

Midwest – Missouri
800-211-4607
Fax 800-211-4608

Southwest – Texas
866-693-6903
Fax 866-693-6904

West – Nevada
800-722-4210
Fax 800-248-3620



AL Series — Functions

SCHLAGE	ANSI		Description
AL10S	F75		Passage Latch Both levers always unlocked.
AL25D			Exit Lock Blank plate outside. Inside lever always unlocked. Specify door thickness, 1 ³ / ₈ " (35 mm) or 1 ³ / ₄ " (44 mm).
AL40S	F76		Bath/Bedroom Privacy Lock Pushbutton locking. Can be opened from outside with a small tool. Turning inside lever releases pushbutton. Closing door on all also releases button.
AL44S			Hospital Privacy Lock Pushbutton locking. Unlocked from outside by turning emergency turn button. Turning inside lever or closing door releases button.
AL170			Single Dummy Trim Single dummy trim for one side of door. Used for door pull or as matching inactive trim.
AL50PD	F82		Entrance/Office Lock Pushbutton locking. Pushing button locks outside lever until unlocked with key or by turning inside lever.
AL53PD	F82		Entrance Lock Turn/pushbutton locking; pushing and turning button locks outside lever requiring use of key until button is manually unlocked. Pushbutton locking; pushing button locks outside lever until unlocked by key or by turning inside lever.
AL70PD	F84		Classroom Lock Outside lever locked and unlocked by key. Inside lever always unlocked.
AL80PD	F86		Storeroom Lock Outside lever fixed. Entrance by key only. Inside lever always unlocked.
AL85PD	F93		Hotel / Motel Lock Outside lever fixed. Entrance by key only. Pushbutton in inside lever activates visual occupancy indicator, allowing only emergency masterkey to operate. Rotation of inside spanner button provides lockout feature by keeping indicator thrown.



Top Notch Distributors, Inc.

East – Pennsylvania
800-233-4210
Fax 800-854-4146

Midwest – Missouri
800-211-4607
Fax 800-211-4608

Southwest – Texas
866-693-6903
Fax 866-693-6904

West – Nevada
800-722-4210
Fax 800-248-3620

www.topnotchinc.com

sales@topnotchinc.com



AL Parts

Backset Links and Reinforcements

Part Number	Description
37-001*	Metal door reinforcer kit, fits both 7/8" and 1" diameter housing.

* Specify door thickness, includes A501-567 and A501-565 or A501-566.

Plunger Units

Part Number	Finish	Description
51-037	605, 612, 613, 619, 626	Plunger unit, ins. - AL53
51-038	605, 612, 613, 619, 626	Plunger unit, ins. - AL85
51-039	605, 612, 613, 619, 626	Plunger unit, ins. - AL40, A:44, AL50
51-040	605, 612, 613, 619, 626	Plunger unit, ins. - AL40
51-041	605, 612, 613, 619, 626	Plunger unit, ins. - AL44

Screws

Part Number	Finish	Description	Type	Size
C603-256	605, 612, 613, 619, 626	ANSI strike	PFH combo	12-24 x 1"
C603-897	605, 609, 612, 613, 619, 626	Latch and strike	PFH combo	8-32 x 3/4"

Screw Packs, Standard

Part Number	Finish	Description	Contents
C203-736	605, 612, 613, 619, 626	ANSI strike	(2) C603-256

Miscellaneous Parts

Part Number	Finish	Description
C604-402	605, 609, 612, 613, 619, 626	Blank rose - AL25





B Series

RESIDENTIAL DEADBOLT LOCKS

Specifications

- Applications:** Auxiliary and primary locking for residential and commercial buildings.
B-SERIES locks are designed to meet various security door preparations and functional requirements as determined by local codes and life safety regulations.
- Certifications:** ANSI A156.5, 1992.
B60-SERIES, Grade 1.
B250-SERIES, Grade 2.
B500-SERIES, Grade 2.
- Exposed Trim:** **B60, B500-SERIES:** Wrought brass or bronze. **Backset:** **B250:** Solid brass or bronze with pressure-cast zinc thumbturn, plated to match finishes indicated.
- Keying:** **B60-SERIES:** 5-pin tumbler standard with two brass keys.
B250, B500-SERIES: 6-pin tumbler keyed to 5-pin.
- Door Range:** **B60-SERIES:** 5-pin: 1 $\frac{3}{8}$ " to 1 $\frac{3}{4}$ " (35mm-44mm) standard.
B250-SERIES: 5 pin: 1 $\frac{3}{8}$ " to 1 $\frac{3}{4}$ " (35mm-44mm) standard. Available to 2 $\frac{3}{4}$ " (70mm), assembled to order.
B500-SERIES: 6pin: 1 $\frac{3}{8}$ " to 2" thick (35mm-51mm) standard.
B700/800-SERIES: 1 $\frac{3}{4}$ " to 2" (44mm-51mm) standard. Available for 1 $\frac{3}{8}$ " (35mm) and doors up to 2 $\frac{1}{2}$ " (63mm), assembled to order. Door ranges may vary by function.

Finishes										
Series	505	605	609	612	613	619	620	625	626	716
B60	•	•	•		•	•	•	•	•	•
B250		•			•				•	
B500		•	•	•	•	•	•		•	•




LATCHES & STRIKES

Standard latches and strikes have adjustable brass or bronze faceplates, furnished in compatible lock trim finishes.

Deadbolts: B60, B500 Series: 1" x 2 $\frac{1}{4}$ " (25mm x 57 mm). 1" (25 mm) throw standard. Circular drive-in, 1/4" (6 mm) round corner deadbolts are also available. **B250-Series:** 1 $\frac{1}{8}$ " x 2 $\frac{1}{4}$ " (29 mm x 57 mm), 9/16" (14 mm) throw standard.

Strikes: B60, B500-Series: Square corner, 1 $\frac{1}{8}$ " x 2 $\frac{3}{4}$ " (29 mm x 70 mm) strike, no lip, furnished with dust box and door frame reinforcer, standard. ANSI 1 $\frac{1}{4}$ " x 4 $\frac{7}{8}$ " (32 mm x 124 mm) with 1 $\frac{3}{16}$ " (30 mm) lip, drive-in and full lip strikes are also available.

B250-Series: Square corner, 1 $\frac{1}{8}$ " x 2 $\frac{3}{4}$ " (29 mm x 70 mm) strike with 1 $\frac{1}{8}$ ".

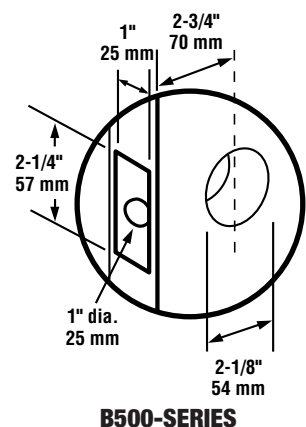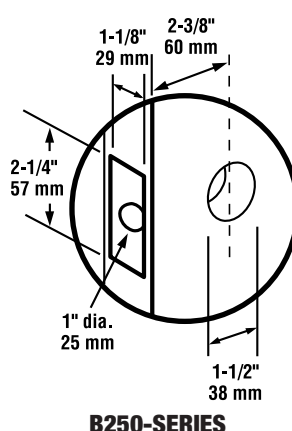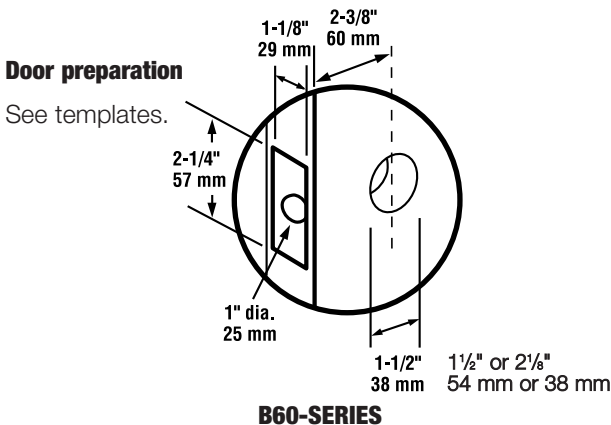

Top Notch Distributors, Inc.

East – Pennsylvania
 800-233-4210
 Fax 800-854-4146

Midwest – Missouri
 800-211-4607
 Fax 800-211-4608

Southwest – Texas
 866-693-6903
 Fax 866-693-6904

West – Nevada
 800-722-4210
 Fax 800-248-3620

www.topnotchinc.com

sales@topnotchinc.com



B Series — Deadbolts

B60-SERIES

Grade 1 **B60-SERIES** with a dual $2\frac{3}{8}$ " (60 mm) or $2\frac{3}{4}$ " (70 mm) backset. Features snap and stay for hands-free installation. 1" (25 mm) throw deadbolt, with a concealed hardened steel pin to prevent cutting or sawing the bolt. Sleek low profile face is almost impossible to grab with a wrench and cannot be unscrewed.




B250PD

B250-SERIES

NIGHTLATCH

Grade 2 **B250-SERIES** nightlatch features a $\frac{9}{16}$ " (14mm) deadlatch that prevents "shimming" the bolt with a credit card or similar tool. A "hold-back" feature retains the deadlatch in a retracted position when desired. Trim rings are reinforced with hardened steel inserts. Brass or bronze faceplates are self-adjusting for beveled door edges. Also available less "hold-back" feature and with double cylinder.

B250PD

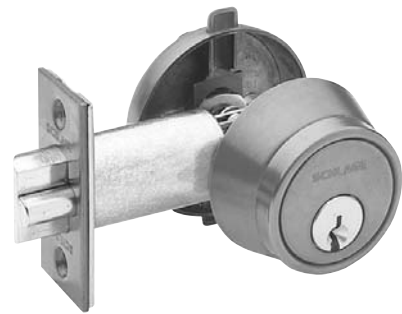

B560

B500-SERIES

SINGLE CYLINDER

Grade 2 **B500-SERIES** deadbolt, adjustable for $2\frac{3}{8}$ " (60mm) or $2\frac{3}{4}$ " (70mm) backsets with lock-in-place helix design, features a 1" throw. Solid steel door frame reinforcer with 3" screws protect against kick-in attack.

B560



†Caution: Double-cylinder locks on residences and any door in any structure which is used for egress are a safety hazard in times of emergency, and their use is not recommended. Installation should be in accordance with existing codes only.



Top Notch Distributors, Inc.

East – Pennsylvania
800-233-4210
Fax 800-854-4146

Midwest – Missouri
800-211-4607
Fax 800-211-4608

Southwest – Texas
866-693-6903
Fax 866-693-6904










West – Nevada
800-722-4210
Fax 800-248-3620

www.topnotchinc.com

sales@topnotchinc.com

B Series — Functions

ANSI A156.5, 1992 BORED DEADBOLT LOCKS

SCHLAGE	ANSI		Description
B560P	E0152		Single-Cylinder Deadbolt Lock Deadbolt thrown or retracted by key from outside or by inside turn unit. Bolt automatically deadlocks when fully thrown.
B562P†	E0142		Double-Cylinder Deadbolt Lock Deadbolt thrown or retracted by key from either side. Bolt automatically deadlocks when fully thrown.
B561P	E0162		One-Way Deadbolt Lock Deadbolt thrown or retracted by key only. Blank plate inside. Bolt automatically deadlocks when fully thrown.
B563P	E0172		Classroom Deadbolt Lock Deadbolt thrown or retracted by key outside. Inside turn unit will retract bolt only. Bolt automatically deadlocks when fully thrown.
B580	E0192		Door Bolt Deadbolt thrown or retracted by turn unit only. No outside trim. Bolt automatically deadlocks when fully thrown.
B571			Door Bolt Occupancy Indicator Deadbolt thrown or retracted by inside turn unit. Occupancy indicator on outside (reads either in use or vacant).
B581	E0112		Door Bolt with Trim Deadbolt thrown or retracted by turn unit only. Outside blank plate. Bolt automatically deadlocks when fully thrown.
Bored deadlatch locks			
B250PD	E2122		Night Latch Deadlocking latch bolt retracted by key from outside or by inside turn unit. Rotating turn unit and activating hold-back feature keeps latch retracted.
B252PD†	E2112		Double-Cylinder Deadlatch Deadlocking latch bolt retracted by key from either side. No hold-back feature.

† **Caution:** Double-cylinder locks on residences and any door in any structure which is used for egress are a safety hazard in times of emergency, and their use is not recommended. Installation should be in accordance with existing codes only.



Top Notch Distributors, Inc.

East – Pennsylvania
800-233-4210
Fax 800-854-4146

Midwest – Missouri
800-211-4607
Fax 800-211-4608

Southwest – Texas
866-693-6903
Fax 866-693-6904

West – Nevada
800-722-4210
Fax 800-248-3620

www.topnotchinc.com

sales@topnotchinc.com

B Series — Latches and Strikes

B60


DEADBOLT Options

Specify	Backset	Description	Finishes
12-287†	2 ³ / ₈ " or 2 ³ / ₄ "	Triple option, standard	605, 609, 612, 613, 619, 620, 626, 716

STRIKE options

Specify	Lip Length	Description	Finishes
10-064	—	Circular, drive-in, thimble-strike, 1 ³ / ₁₆ " diameter, 494 (for 626) only	—
10-087	1 ³ / ₁₆ "	ANSI, with dust box, 1 ¹ / ₄ " x 4 ⁷ / ₈ "	605, 606, 609, 612, 613, 625, 626
10-092	1 ¹ / ₈ "	1/4" radius round corner, full lip, no box, 1 ⁵ / ₈ " x 2 ¹ / ₄ "	605, 609, 612, 613, 619, 620, 626, 716
10-094	—	Square corner, no box, 1 ⁵ / ₈ " x 2 ¹ / ₄ "	605, 609, 612, 613, 619, 620, 626, 716
10-095	1 ¹ / ₈ "	Square corner, full lip, no box, 1 ⁵ / ₈ " x 2 ¹ / ₄ "	605, 609, 612, 613, 619, 620, 626, 716
10-116†	—	Radius round corner, 1 ¹ / ₈ " x 2 ³ / ₄ ", standard	—
B520-283	—	Strike box for deadbolt	—
K510-066	—	Box for ANSI strike	—

† Indicates standard components and are furnished with locks unless otherwise specified.

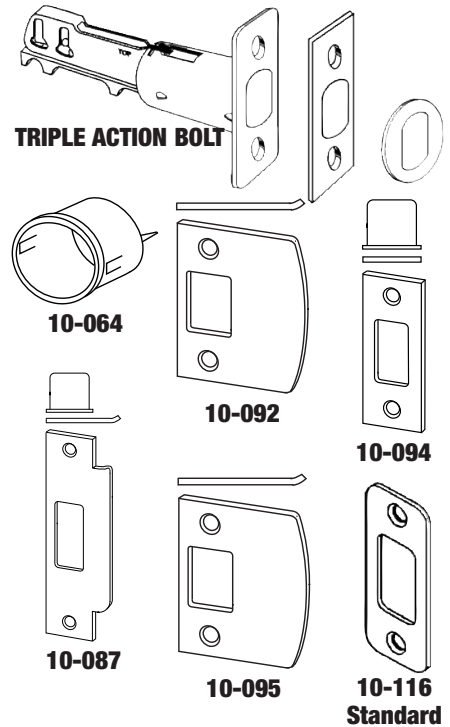

B250PD

DEADLATCH Options


Specify	Backset	Description	Finishes
12-100†	2 ³ / ₈ "	Square corner, 1 ¹ / ₈ " x 2 ¹ / ₄ ", standard	605, 613, 626
12-103	2 ³ / ₄ "	Square corner, 1 ¹ / ₈ " x 2 ¹ / ₄ "	605, 613, 626
39-030*	—	Rabbeted latch and strike kit	605, 626

STRIKE options

Specify	Lip Length	Description	Finishes
10-001†	1 ¹ / ₈ "	Square corner T-strike, box, 1 ¹ / ₈ " x 2 ³ / ₄ " standard	
10-001	1", 1 ¹ / ₄ ", 1 ¹ / ₂ ", 1 ³ / ₄ ", 2"	Square corner T-strike, box, 1 ¹ / ₈ " x 2 ³ / ₄ "	
10-004	1 ¹ / ₈ "	1/4" radius round corner, T-strike, box, 1 ¹ / ₈ " x 2 ³ / ₄ "	605, 612, 613, 619, 626
10-025	1 ³ / ₁₆ " or 1 ³ / ₈ "	ANSI, no box, 1 ¹ / ₄ " x 4 ⁷ / ₈ "	605, 606, 612, 613, 619, 625, 626
K510-066	—	Box for ANSI strike, must be specified	
C603-623	—	Box for T-strike	

* This kit adapts square corner latches and 2³/₄" high square corner strikes to 1/2" rabbeted door and frame preparations.

† Indicates standard components and are furnished with locks unless otherwise specified.

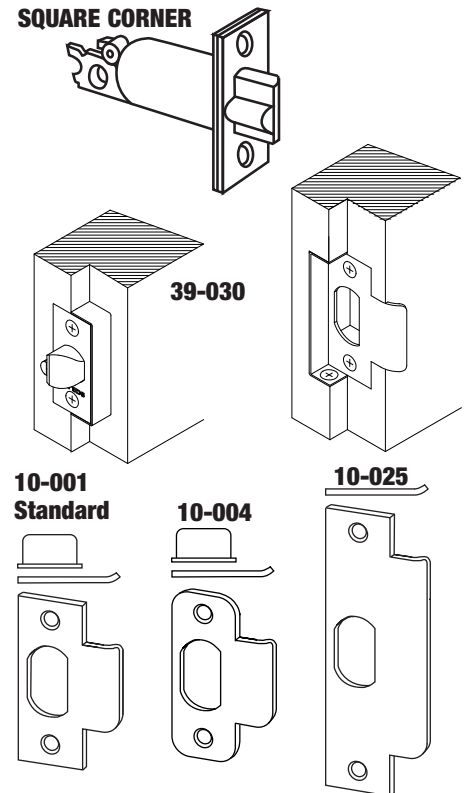


B Series — Latches

B500 DEADBOLT Options


Specify	Backset	Description	Finishes
12-287	2 ³ / ₈ " or 2 ³ / ₄ "	Triple option, 1/4" radius round corner faceplate with 1" x 2 1/4" square corner and circular faceplates standard	505, 605, 609, 612, 613, 619, 620, 626, 716
12-288	2 ³ / ₈ " or 2 ³ / ₄ "	Square corner 1" x 2 1/4"	605, 609, 612, 613, 619, 626, 716
12-633	5"	Fixed backset, square corner, 1 1/8" x 2 1/4"	605, 609, 612, 613, 619, 626
39-030**	—	Rabbeted deadbolt and strike kit,	605, 626

**This kit adapts square corner latches and 2 3/4" high square corner strikes to 1/2" rabbeted door and frame preparations.


12-288



12-287



39-030

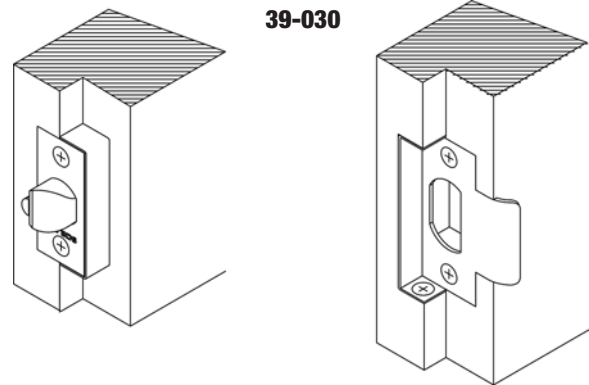


B500 DEADBOLT STRIKE Options


Specify	Description	Lip Length	Finishes
10-064	Circular, drive-in, thimble-strike, 13/16" diameter, 494 (for 626) only	—	
10-087	ANSI, with dust box, 1 1/4" x 4 7/8"	13/16"	605, 606, 609, 612, 613, 625, 626
10-092	1/4" radius round corner, full lip, no box, 1 5/8" x 2 1/4"	1 1/8"	605, 609, 612, 613, 619, 620, 626, 716
10-094†	Square corner, no box, 1 1/8" x 2 3/4", standard	—	605, 609, 612, 613, 619, 620, 626, 716
10-095	Square corner, full lip, no box, 1 5/8" x 2 1/4"	1 1/8"	605, 609, 612, 613, 619, 620, 626, 716

† Indicates standard components and are furnished with locks unless otherwise specified.


10-064



10-092




10-095



**10-094
Standard**



10-087



B Series — Parts

Trim for B250

Part Number	Finish	Description
B202-671	605, 626	Rose and turn without holdback
B202-672	605, 613, 626	Rose and turn with holdback
B502-711		Support (anchor) for turn mounting screws - B270
B502-815	605, 626	Blank inside rose, exposed screws

Trim for B500

Part Number	Finish	Description
B302-041	605, 606, 609, 612, 613, 619, 625, 626, 716	Rose and turn for B560
12-626	605, 606, 609, 612, 613, 619, 625, 626, 716	Blank rose, exposed screws for B561/B661
38-034	605, 606, 613, 626, 716	Blank mounting plate kit for B664/764/864 and B680
B302-045	605, 606, 609, 612, 613, 619, 625, 626, 716	Classroom rose and turn for B563


Adapters

Part Number	Finish	Description	Contents
38-016		Adapter ring kit for double cylinder locks used in 2 1/8" hole for B250	(2) 38-031
38-017	605, 613, 626	Adapter ring kit for single cylinder locks used in 2 1/8" hole for B250	(1) 38-031 and (1) 38-032
38-031	605, 609, 612, 613, 625, 626	2 1/2" Diameter adapter ring for 2 1/8" door prep for under cylinder for B250, B500	—
38-032	605, 613, 626	2 7/8" Diameter adapter ring for 2 1/8" door prep for under turn units/blank roses for B250	—
A501-878		Faceplate adapter to adapt 1" faceplate to 1 1/8" door preparation, for BC100 deadbolts only	—
B520-649	605, 609, 612, 613, 619, 625, 626, 716	Trim ring with shield for B560/B562	—


B202-671




B202-672




B302-041




B600-018



12-626




B302-045



38-031



38-032



A501-878




B520-649



B Series — Parts

Door/Frame Reinforcements

Part Number	Description
37-016	Door frame strike reinforcer for B250 and B500
A501-565	Reinforcer for 1 3/8" thick nonreinforced metal doors; fits both 7/8" and 1" diameter housings (2 required per lock) for B250 and B500
A501-566	Reinforcer for 1 3/4" thick nonreinforced metal doors; fits both 7/8" and 1" diameter housings (2 required per lock) for B250 and B500
B520-622	Metal dust box reinforcer for B500

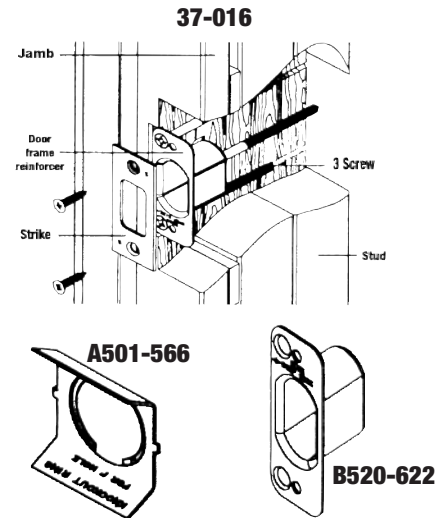

Occupancy Emergency Key

Part Number	Description
61-509	Emergency release key standard size, for occupancy deadbolts for B571

Includes one key, ring, and instruction tag.

Special Parts

Extended Factory Lead Time

Not subject to standard discount terms

Part Number	Function	Description
XB12-208	B560	Screw and tailpiece conversion kit for B500 series locks to fit doors. Extended Equally (EE), over 2 1/4" – 4" thick. Specify door thickness.
XB12-209	B562	



Top Notch Distributors, Inc.

East – Pennsylvania
800-233-4210
Fax 800-854-4146

Midwest – Missouri
800-211-4607
Fax 800-211-4608

Southwest – Texas
866-693-6903
Fax 866-693-6904

West – Nevada
800-722-4210
Fax 800-248-3620

www.topnotchinc.com

sales@topnotchinc.com



B Series — Parts

Screws for B250

Part Number	Specify Finish	Description		Application		
		Size	Type	Use with:	Door Thickness	
Single Cylinder, B250PD						
B520-086	605, 613, 626	10-32 x 2 1/4"	POH machine	7/16" & 1/8" trim rings 7/16" trim ring	5-Pin	1 5/16" – under 1 11/16" 1 11/16" – 1 15/16"
				(2) 1/8" trim rings 7/16" & 1/8" trim rings	6-Pin	1 5/16" – under 1 7/16" 1 7/16" – 1 13/16"
B520-087	605, 612, 613, 626	10-32 x 2 5/8"		7/16" trim ring 1/8" trim ring	5-Pin	over 1 15/16" – 2 1/4" over 2 1/4" – 2 9/16"
				7/16" & 1/8" trim rings 7/16" trim ring 1/8" trim ring	6-Pin	over 1 13/16" – 1 15/16" over 1 15/16" – 2 9/16" over 2 9/16" – 2 3/4"
Double Cylinder, B252PD						
B520-267		10-32 x 2 1/2"	Cross recess	7/16" & 1/8" trim rings 7/16" trim ring 1/8" trim ring	5-Pin	1 5/16" – under 1 11/16" 1 11/16" – 1 15/16" 2 1/16" – 2 11/16"
B520-268		10-32 x 2 3/4"		7/16" & 1/8" trim rings 7/16" trim ring 1/8" trim ring	5-Pin	over 1 7/16" – under 1 11/16" over 1 15/16" – under 2 7/16" over 2 11/16" – 2 7/8"
				7/16" & 1/8" trim rings 7/16" trim ring 1/8" trim ring	6-Pin	1 7/16" – under 1 9/16" over 1 11/16" – 2 3/16" over 2 11/16" – 2 13/16"
B520-269		10-32 x 3"		(4) 1/8" trim rings 7/16" & 1/8" trim rings 7/16" trim ring 1/8" trim ring	6-Pin	1 3/16" – under 1 7/16" 1 9/16" – 1 15/16" over 2 13/16" – 2 11/16" over 2 13/16" – 3 1/8"
B520-271	605, 613, 626	Drive pin		–		–
Interchangeable Core, Single Cylinder, B250RD						
B520-086	605, 612, 626	10-32 x 2 1/4"	POH machine	1" & 1/8" trim rings 1" trim ring		1 5/16" – 1 1/2" over 1 1/2" – 2 1/8"
B520-087	605, 612, 613, 626	10-32 x 2 5/8"		1" trim ring 7/16" & 1/8" trim rings 7/16" trim ring		over 2 1/8" – 2 3/8" over 2 3/8" – 2 5/8" over 2 5/8" – 3 1/8"
Interchangeable Core, Double Cylinder, B252RD						
B520-269		10-32 x 3"	Cross recess	1" & 1/8" trim ring 1" trim ring 7/16" & 1/8" trim rings 1" trim ring		1 5/16" – 1 5/8" over 1 5/8" – 2 1/8" over 2 1/8" – 2 3/8" over 2 3/8" – 2 5/8"
B520-271	605, 613, 626	Drive pin		–		–
All Functions						
C603-256	605, 612, 613, 619, 626	12-24 x 1"	PFH	ANSI strike		–
C603-897	605, 609, 612, 613, 619, 626	8 x 3/4"	combo	Latch and strike		–



Top Notch Distributors, Inc.

East – Pennsylvania
800-233-4210
Fax 800-854-4146

Midwest – Missouri
800-211-4607
Fax 800-211-4608

Southwest – Texas
866-693-6903
Fax 866-693-6904

West – Nevada
800-722-4210
Fax 800-248-3620

www.topnotchinc.com

sales@topnotchinc.com



B Series — Parts

Screw Packs

Part Number	Finish	Door Thickness	Contents
Keyless, B580			
61-506	605, 609, 612, 613, 619, 626	1 ³ / ₈ " – 2 ¹ / ₄ "	(2) B600-048 (2) F605-359 (4) C603-897 (1) B600-018 (2) B600-066
Keyed, Single Cylinder, B560, B563			
61-500	605, 612, 613, 626	1 ³ / ₈ " – 1 ³ / ₄ "	(1) B600-018 (2) B600-100 (2) B600-066 (4) C603-897
61-501	605, 612, 613, 626	over 1 ³ / ₄ " – 2 ¹ / ₄ "	(1) B600-018 (2) B600-101 (2) B600-066 (4) C603-897
Keyed, Double Cylinder, B562			
61-502	605, 612, 613, 626	1 ³ / ₈ " – 1 ³ / ₄ "	(2) B600-047 (4) C603-897
61-503	605, 612, 613, 626	over 1 ³ / ₄ " – 2 ¹ / ₄ "	(2) B600-078 (4) C603-897

Screw and Tailpiece Packs, Standard

Part Number	Finish	Door Thickness	Contents
Single Cylinder, B250PD			
B202-509		1 ³ / ₈ " – 2 ³ / ₄ "	(1) B202-558 (2) B520-086
Double Cylinder, B252PD			
B202-560		5-Pin 1 ¹ / ₂ " – 1 ³ / ₄ ", 2 ¹ / ₂ "	(2) B202-370 (2) B202-580 (2) B520-267 (2) B520-271
B220-043		6-Pin 1 ⁵ / ₈ ", 1 ³ / ₄ ", 3" or 1 ³ / ₈ ", 1 ³ / ₄ ", 2 ¹ / ₄ ", 2 ¹ / ₂ ", 2"	(2) B202-369 (2) B520-269
All Functions			
B202-517	605, 609, 612, 613, 626	–	(4) C603-897



Top Notch Distributors, Inc.

East – Pennsylvania
800-233-4210
Fax 800-854-4146

Midwest – Missouri
800-211-4607
Fax 800-211-4608

Southwest – Texas
866-693-6903
Fax 866-693-6904

West – Nevada
800-722-4210
Fax 800-248-3620

www.topnotchinc.com

sales@topnotchinc.com

F Series — Knobs

RESIDENTIAL LOCK SETS

Specifications

- Applications:** Residential single- and multi-family doors.
- Certifications:** ANSI A156.2, 1996, **Series 4000** Grade 2. U.L./cU.L.-listed up to three-hour doors available, assembled to order when specified with "F" suffix. Example: F51F.
- Exposed trim:** Wrought brass. Levers are zinc based, plated to match finishes indicated.
- Keying:** Five-pin tumbler C keyway with two nickel silver keys. Available for all knob designs, Accent and Flair levers.
- Door range:** 1³/₈" to 1³/₄" (35mm-44mm) standard. Most functions available for 2" (51mm) doors; specify when ordering.
- Backset:** Universal latch standard, fits either 2³/₈" (60mm) or 2³/₄" (70mm) backsets. 5" (127mm) backset available.

Standard features

- Lifetime Mechanical Warranty and 10-Year Finish Warranty for residential applications.
- Pressure-cast zinc tubular lock housing.
- Key-removable outside knobs or levers for easy cylinder replacement.
- Three-piece assembly for fast, easy installation.
- Meets 400,000-cycle ANSI Grade 2 requirements.
- One-piece knob for better security and appearance.

Finishes


Knobs	505	605	609	613	619	620	622	625	626	716
BELL	•	•	•						•	
GEORGIAN	•	•								
ORBIT	•	•	•	•	•	•				
PLYMOUTH			•		•	•	•		•	•
SIENA	•	•	•	•	•	•				•

* ARTISAN SERIES™


Schlage's new Artisan Series features Old World finishes, such as Antique Pewter (620), Bright Chromium (625), and Oil Rubbed Bronze (613) that are once again popular today. Each piece combines quality craftsmanship with state-of-the-art finish technology, making it the ideal door hardware for artistic enhancement and lasting visual impressions.

Available in Residential **F-SERIES** Products only.


BELL




GEORGIAN




ORBIT



PLYMOUTH



SIENA



F Series — Levers

RESIDENTIAL LOCK SETS

LATCHES & STRIKES

Latches: 1" x 2 1/4" (25mm x 57mm), 1/2" (13mm) triple option latch standard throw standard. 1 1/8" (29mm) faceplate adapters available. Circular drive-in and 1/4" (6mm) radius round corner available.

Strikes: Full lip, 1 5/8" x 2 1/4" (41mm x 57mm), 1 1/8" (29mm) lip, **#10-026**, standard. Optional strikes: Full lip, 1/4" (6mm) radius round corner; circular drive-in, ANSI 1 1/4" x 4 7/8" (32mm x 124mm), 1 3/16" (30mm) lip. U.L.-listed locks are furnished with **#10-001** T-strike, 1 1/8" x 2 3/4" (29mm x 70mm), 1 1/8" (29mm) lip. (Also available with standard product.)

Note: Bath/bedroom privacy function F40 is available with inside trim in 625, bright chromium plated.

Finishes

Levers	505	605	609	613	619	620	622	625	626	716
ACCENT	•	•	•	•	•	•	•			•
AVANTI	•	•	•	•	•	•				•
ELAN	•	•	•					•	•	
FLAIR	•	•	•	•	•	•			•	•
JAZZ	•	•	•		•				•	
LATITUDE					•			•	•	•
MANHATTAN	•	•			•			•		


* Artisan Series™

Schlage's new Artisan Series features Old World finishes, such as Antique Pewter (620), Bright Chromium (625), and Oil Rubbed Bronze (613) that are once again popular today.

Available in Residential **F-Series** Products only.




ACCENT




Note: Specify door handing for Accent design.



AVANTI



ELAN



LATITUDE



Top Notch Distributors, Inc.

East — Pennsylvania
800-233-4210
Fax 800-854-4146

Midwest — Missouri
800-211-4607
Fax 800-211-4608

Southwest — Texas
866-693-6903
Fax 866-693-6904

West — Nevada
800-722-4210
Fax 800-248-3620

www.topnotchinc.com


sales@topnotchinc.com




F Series — Levers

Door preparation

See templates.

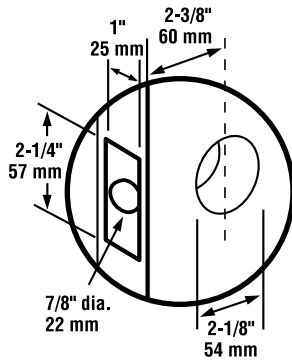


FLAIR




Note: Specify door handing for Flair design.



JAZZ



MANHATTAN



Top Notch Distributors, Inc.

East — Pennsylvania
800-233-4210
Fax 800-854-4146

Midwest — Missouri
800-211-4607
Fax 800-211-4608

Southwest — Texas
866-693-6903
Fax 866-693-6904

West — Nevada
800-722-4210
Fax 800-248-3620

F Series — Entrance Handleset

RESIDENTIAL LOCK SETS

Specifications

- Applications:** Residential single and multi-family entrance doors.
- Exposed trim:** Outside trim: Handlesets are solid forged brass; wrought brass trim rings with concealed security inserts. Inside trim: Wrought brass; levers are pressure-cast zinc, plated to match finishes indicated.
- Keying:** Six-pin tumbler with two nickel silver keys per lock. Stock locks are keyed five pin.
- Door range:** 1⁵/₈" to 2" thick (41mm-51mm) standard.
- Backset:** Universal latches and deadbolts fit 2³/₈" (60mm) or 2³/₄" (70mm) backsets.
- Trim rings and security inserts: F-SERIES** handlesets are furnished with wrought brass cylinder trim rings. The cylinder trim rings are reinforced by a tapered die-cast security insert installed under the trim ring for resistance to wrenching or prying the cylinder unit.


Standard features

- Lifetime Mechanical Warranty, 10-Year Durable Finish Warranty, and ULTIMA® Lifetime Finish Warranty for residential applications.
- 1" (25mm) throw deadbolt, 7/8" (22mm) housing standard.
- Solid brass pin tumbler cylinder assembled with pick-resistant pins.
- Large inside thumbturn for easy operation.
- Century and Bowman designs are thru-bolted for added security. Parthenon and Plymouth designs can accommodate both thru-bolting and surface installations.


Finishes

Handlesets	505	605	609	613	619	620	622	625	626	716
ADDISON	•		•		•		•			•
BOWMAN	•	•	•							
CAMELOT	•	•	•	•	•	•	•			•
CENTURY			•		•				•	•
PARTHENON			•							
PLYMOUTH	•	•	•	•	•	•	•			•

ADDISON

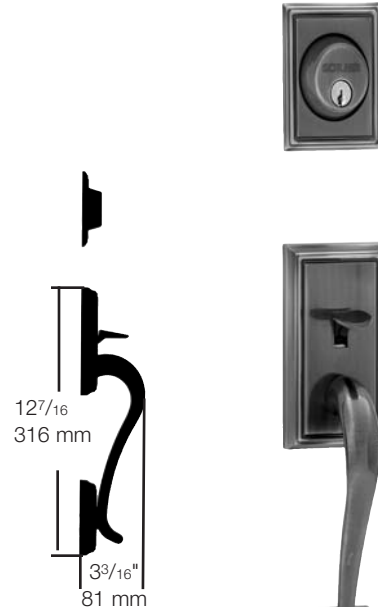

BOWMAN

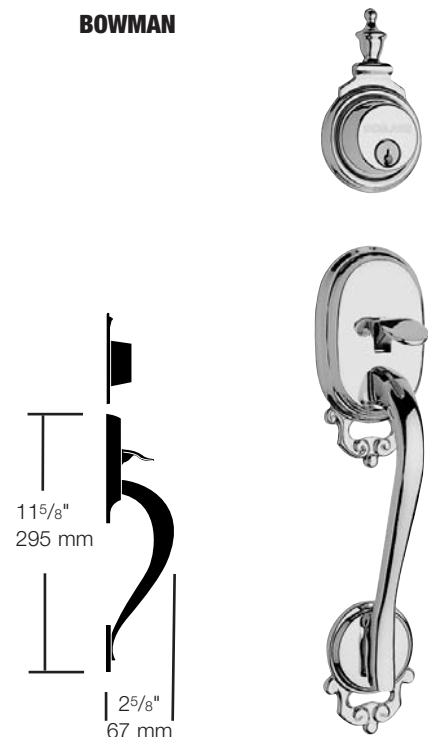

Top Notch Distributors, Inc.

East – Pennsylvania
800-233-4210
Fax 800-854-4146

Midwest – Missouri
800-211-4607
Fax 800-211-4608

Southwest – Texas
866-693-6903
Fax 866-693-6904

West – Nevada
800-722-4210
Fax 800-248-3620

www.topnotchinc.com

sales@topnotchinc.com



F Series — Entrance Handleset


RESIDENTIAL ENTRANCE HANDLESETS

LATCHES & STRIKES

Deadbolt: Furnished with **B60 MAXIMUM SECURITY DEADBOLT-SERIES** standard deadbolt. All optional **B60-SERIES** deadbolts available.


Strikes: **B60** and **F-SERIES** standard strikes. All **B60** and **F-SERIES** optional strikes available.

Door frame reinforcer (37-016): Furnished standard with deadbolts. This unit significantly strengthens a wood jamb against "kick-in" attack and greatly increases the security effectiveness of the lock. The reinforcer is concealed under the strike and is anchored to the jamb with two 3" (76mm) long screws.

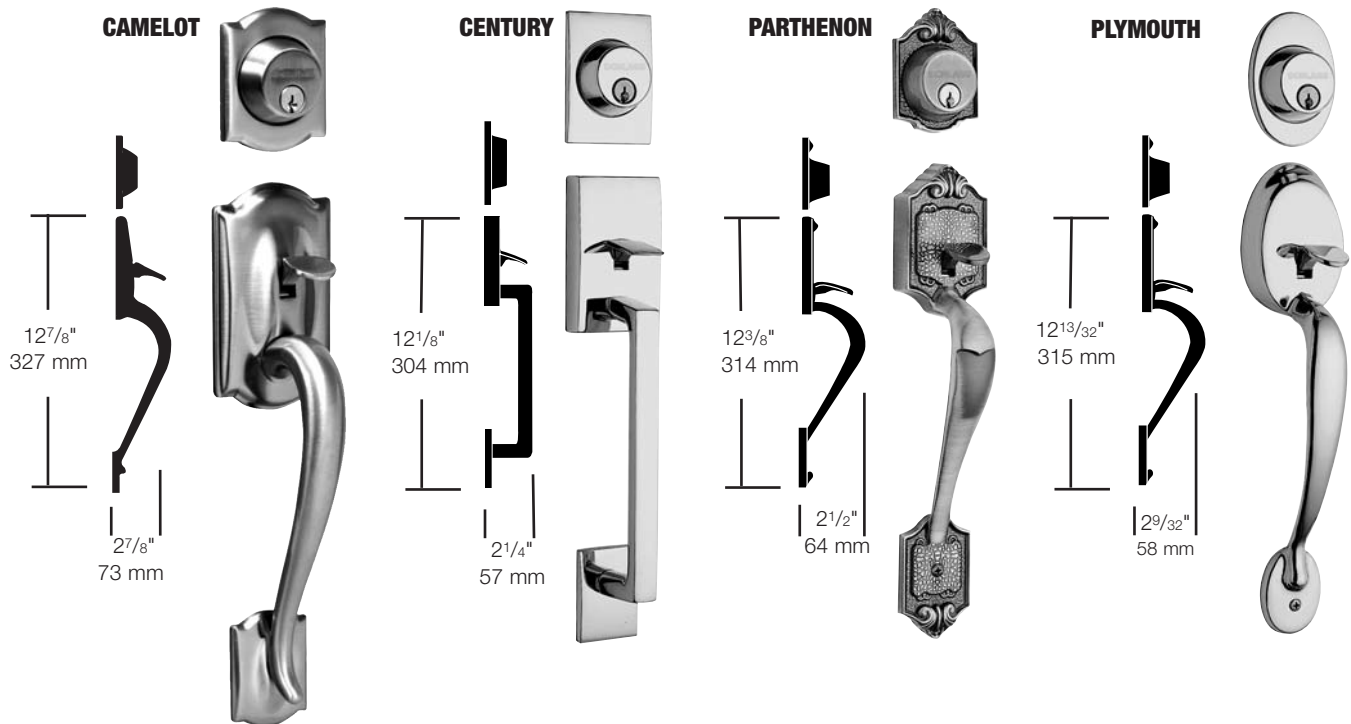

Door preparation

F360

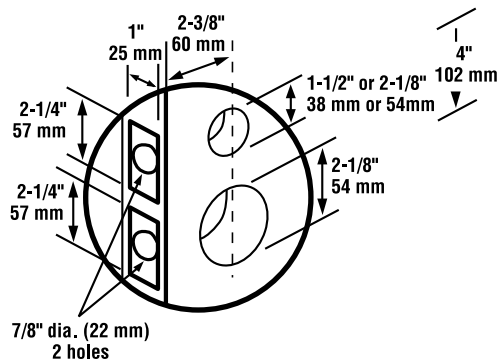

See templates.



Top Notch Distributors, Inc.

East — Pennsylvania
 800-233-4210
 Fax 800-854-4146

Midwest — Missouri
 800-211-4607
 Fax 800-211-4608

Southwest — Texas
 866-693-6903
 Fax 866-693-6904

West — Nevada
 800-722-4210
 Fax 800-248-3620

www.topnotchinc.com

sales@topnotchinc.com



F Series Knobs/Levers — Functions

ANSI A156.2, 1996, Series 4000 KEYED AND NON-KEYED LOCKS

SCHLAGE	ANS	Knobs	Levers	Description
F10	F75			Passage Latch Both knobs/levers always unlocked.
F30	F77			Patio Lock Pushbutton locking. Turning inside knob releases button.
F40	F76			Bath/Bedroom Privacy Lock Pushbutton locking. Can be opened from outside with a small tool. Turning inside knob/lever releases pushbutton. Closing door on all except F40 also releases button.
F170				Single Dummy Trim Single dummy trim for one side of door. Used for door pull or as matching inactive trim.
F51	F81			Entrance Lock Unlocked by key from outside when outer knob/lever is locked by turn-button in inside knob/lever. Inside knob/lever always unlocked.
F54	F82			Entrance Lock Unlocked by key from outside when outer knob/lever is locked by turn-button inside. Inside knob/lever is locked and unlocked by turn button.
F80	F86			Storeroom Lock Outside knob/lever fixed. Entrance by key only. Inside knob/lever always unlocked.
FB50				Entry Combination Lock F51 and B60 Keyed Ailke. Brass Only.

F SERIES DEADBOLT CYLINDER OPTIONS:

- STANDARD PIN AND TUMBLER
- SECURE KEY



Top Notch Distributors, Inc.

East – Pennsylvania
800-233-4210
Fax 800-854-4146

Midwest – Missouri
800-211-4607
Fax 800-211-4608

Southwest – Texas
866-693-6903
Fax 866-693-6904

West – Nevada
800-722-4210
Fax 800-248-3620

www.topnotchinc.com

sales@topnotchinc.com



F Series Entrance Handleset—Functions

ANSI A156.13, 1994 Series 1000

SCHLAGE

Description

F58



Exterior Entrance Lock

Outside grip and deadbolt trim of F360.

F59




Interior Entrance Lock

Inside trim, deadbolt, latch, screws and strikes of F360.



F60

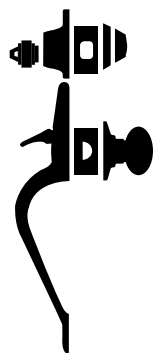

Entrance Lock

Deadbolt thrown or retracted by key from outside or by inside turn unit. Latch retracted by thumbpiece from outside or by inside knob/lever.



Top Notch Distributors, Inc.

East – Pennsylvania
800-233-4210
Fax 800-854-4146

Midwest – Missouri
800-211-4607
Fax 800-211-4608

Southwest – Texas
866-693-6903
Fax 866-693-6904

West – Nevada
800-722-4210
Fax 800-248-3620



F Series Entrance Handleset—Functions

ANSI A156.13, 1994 Series 1000

SCHLAGE

Description

F62†



Double Cylinder Entrance Lock

Deadbolt thrown or retracted by key from either side. Latch retracted by thumbpiece from outside or by inside knob/lever.

F92



Outside Dummy Trim

For use as door pull or as dummy trim on inactive leaf of pair of doors. Includes entrance handleset and dummy cylinder.

F94



Inside Dummy Trim

For use as door pull as dummy trim on inactive leaf of pair of doors. Includes inside knob/lever, blank rose and screws.

† **Caution:** Double-cylinder locks on residences and any door in any structure which is used for egress are a safety hazard in times of emergency, and their use is not recommended. Installation should be in accordance with existing codes only.



Top Notch Distributors, Inc.

East – Pennsylvania
800-233-4210
Fax 800-854-4146

Midwest – Missouri
800-211-4607
Fax 800-211-4608

Southwest – Texas
866-693-6903
Fax 866-693-6904

West – Nevada
800-722-4210
Fax 800-248-3620

www.topnotchinc.com


sales@topnotchinc.com

F Series — Latches


Latch Options

Springlatch	Deadlatch	Backset	Description	Finishes
16-080†	16-211†	2 ³ / ₈ " or 2 ³ / ₄ "	Double Option, standard	605, 609, 613, 619, 620, 626, 716
–	16-126*	5"	Square corner, 1" x 2 ¹ / ₄ "	605, 609, 612, 613, 619, 620, 626
39-030**	–		Rabbeted latch and strike kit,	605, 626


TRIPLE OPTION DEADLATCH

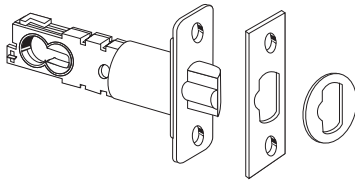

TRIPLE OPTION SPRINGLATCH



39-030

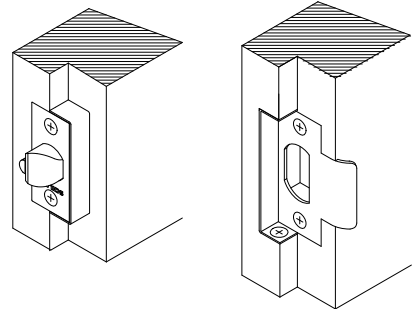

For U.L.-Listed Locks: F10F, F51F, F80F

				Finishes
–	16-203†	2 ³ / ₈ " or 2 ³ / ₄ "	Square corner, 1" x 2 ¹ / ₄ ", standard	605, 612, 613, 626
–	16-204	2 ³ / ₈ " or 2 ³ / ₄ "	1/4" radius round corner, 1" x 2 ¹ / ₄ "	605, 612, 613, 626
–	16-132	5"	Square corner, 1 ¹ / ₈ " x 2 ¹ / ₄ "	605, 612, 613, 619, 626


* Latches include **A501-878** faceplate adapter for 1¹/₈" face.

** This kit adapts square corner latches and 2³/₄" high square corner strikes to 1/2" rabbeted door and frame preparations.


† Indicates standard components and are furnished with locks unless otherwise specified.

Note: 1) Failure to use the above U.L.-Listed latches and the **S605-206** fire cup included with the lockset will invalidate the UL Listing.


SQUARE CORNER



RADIUS ROUND CORNER



A501-878



F Series — Latches

F60 DEADBOLT Options


Specify	Backset	Description	Finishes
12-300†	2 ³ / ₈ " or 2 ³ / ₄ "	Triple option, standard	605, 609, 613, 619, 626, 620, 626
12-301	2 ³ / ₈ " or 2 ³ / ₄ "	Square corner, 1" x 2 ¹ / ₄ "	605, 609, 613, 619, 626, 620, 626
12-302	2 ³ / ₈ " or 2 ³ / ₄ "	1/4" radius round corner, 1" x 2 ¹ / ₄ "	605, 609, 613, 619, 626, 620, 626
12-303	2 ³ / ₈ " or 2 ³ / ₄ "	Circular, drive-in	626
12-304*	2 ³ / ₈ " or 2 ³ / ₄ "	Square corner, 1 ¹ / ₈ " x 2 ¹ / ₄ "	605, 609, 613, 619, 626, 620, 626
39-030**	—	Rabbeted latch and strike kit,	605, 626

* Latches include **A501-878** faceplate adapter and **G506-815** housing sleeve.


** This kit adapts square corner latches and 2³/₄" high square corner strikes to 1/2" rabbeted door and frame preparations.

† Indicates standard components and are furnished with locks unless otherwise specified.


TRIPLE OPTION DEADBOLT

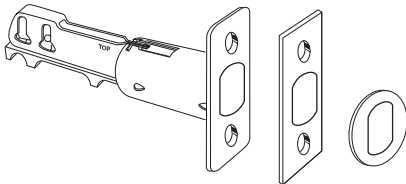


SQUARE CORNER DEADBOLT

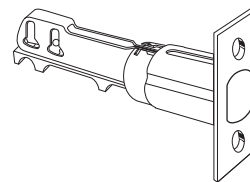


RADIUS CORNER DEADBOLT

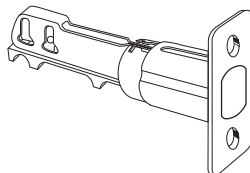


CIRCULAR DRIVE IN DEADBOLT

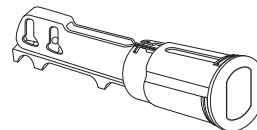


39-030

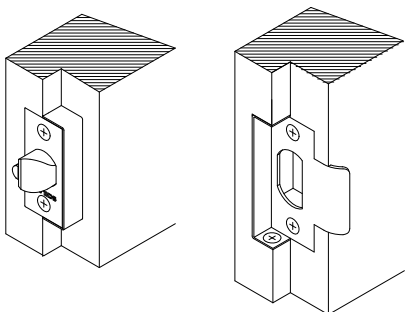

A501-878



G506-815




F Series — Strikes

F60 DEADBOLT STRIKE Options

Specify	Description	Lip Length	Finishes
10-064	Circular, drive-in, thimble-strike, 1 ³ / ₁₆ " diameter, 494 (for 626) only	—	
10-087	ANSI, with box, 1 ¹ / ₄ " x 4 ⁷ / ₈ ", standard	1 ³ / ₁₆ "	605, 606, 609, 612, 613, 625, 626
10-092	1/4" radius round corner, full lip, no box, 1 ⁵ / ₈ " x 2 ¹ / ₄ "	1 ¹ / ₈ "	605, 606, 609, 612, 613, 625, 626, 716
10-025†	Square corner, box, 1 ¹ / ₈ " x 2 ³ / ₄ ", standard	—	605, 606, 612, 613, 619, 625, 626
10-095	Square corner, full lip, no box, 1 ⁵ / ₈ " x 2 ¹ / ₄ "	—	605, 609, 612, 613, 619, 620, 626, 716

F latch strike options

Specify	Description	Lip Length	Finishes
10-001	Square corner T-strike, box, 1 ¹ / ₈ " x 2 ³ / ₄ "	1 ¹ / ₈ "	
10-025†	ANSI, no box, 1 ¹ / ₄ " x 4 ⁷ / ₈ "	1 ³ / ₁₆ "	605, 606, 612, 613, 619, 625, 626
10-026	Square corner, full lip, no box, 1 ⁵ / ₈ " x 2 ¹ / ₄ "	1 ¹ / ₈ "	605, 609, 612, 613, 619, 620, 626, 716
10-027	1/4" Radius round corner, full lip, no box, 1 ⁵ / ₈ " x 2 ¹ / ₄ "	1 ¹ / ₈ "	605, 609, 612, 613, 619, 620, 626, 716
10-058	Circular, adjustable, 1 ³ / ₄ " diameter,	1 ⁷ / ₃₂ "	605, 609, 612, 613, 619, 620, 626

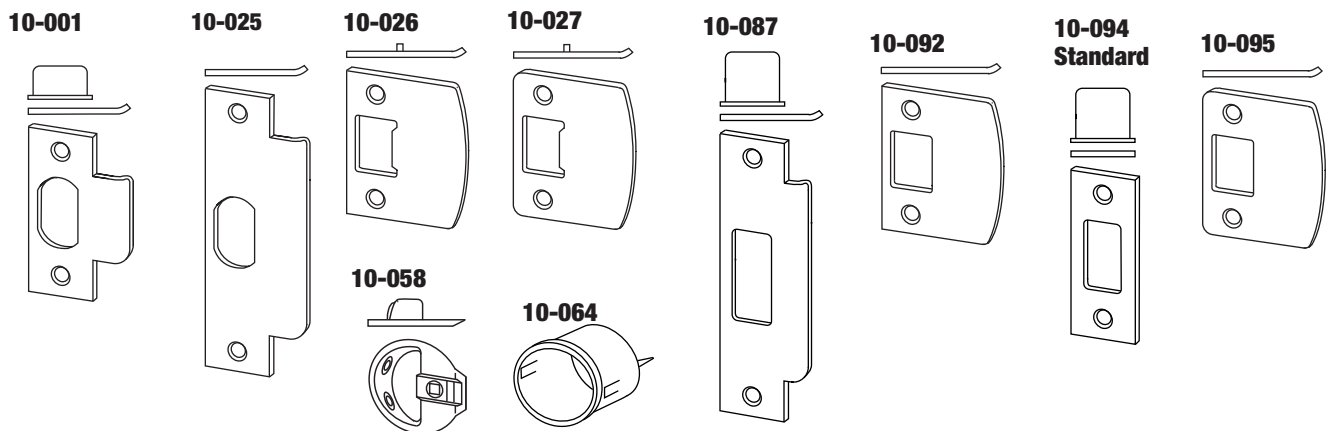

F300 DEADBOLT STRIKE Options

Latch Strike	Deadbolt Strike	Description	Finishes
	10-094†	Square corner and 1/4" radius round corner latch strike, square corner deadbolt strike, standard	605, 609, 612, 613, 619, 620, 626, 716
10-026	10-094	Square corner	605, 609, 612, 613, 619, 620, 626, 716
10-027	10-092	1/4" radius round corner	605, 609, 612, 613, 619, 620, 626, 716
10-058	10-064	Circular latch strike and thimble deadbolt strike	605, 609, 612, 613, 619, 620, 626
10-026	10-095	Square corner, full lip, no box	605, 609, 612, 613, 619, 620, 626, 716
10-027	10-094	1/4" radius round corner latch strike and square corner, box, deadbolt strike	605, 609, 612, 613, 619, 620, 626, 716
10-026	10-064	Square corner latch strike and thimble deadbolt strike	605, 609, 612, 613, 619, 620, 626, 716
10-027	10-064	1/4" radius round corner latch strike and thimble deadbolt strike	605, 609, 612, 613, 619, 620, 626, 716

† Indicates standard components and are furnished with locks unless otherwise specified.



Top Notch Distributors, Inc.

East — Pennsylvania
800-233-4210
Fax 800-854-4146

Midwest — Missouri
800-211-4607
Fax 800-211-4608

Southwest — Texas
866-693-6903
Fax 866-693-6904

West — Nevada
800-722-4210
Fax 800-248-3620

www.topnotchinc.com

sales@topnotchinc.com

FA Series — Knobs

Specifications

Applications: Residential single and multi-family doors.

Certifications: ANSI A156.2, 1996, **Series 4000**
Grade 2.


Exposed trim: Wrought brass. Plated to match finishes indicated.

Keying: Two nickel silver cut keys per lock.
five-pin, C section.


Door range: 1³/₈" to 1³/₄".

Backset: Dual backset latches, fits either 2³/₈" or
2³/₄" backsets.

ANDOVER



DANBURY



Standard features

- Surpass all ANSI Grade 2 standards for strength and security.
- Three piece assembly for easy installation.
- Removable trim for easy upgrade or remodel.
- Variety of finishes and functions.
- Triple Option latches and universal backsets for effortless installation.
- Lifetime Limited Finish and Mechanical Warranties.
- Can be rekeyed to match Schlage, Dexter or other locks.
- Concealed screws.

Finishes

Knobs	505	605	609	613	619	620	622	625	626	716
ANDOVER	•	•	•	•	•	•		•	•	•
DANBURY	•	•	•	•	•	•	•	•	•	•



Top Notch Distributors, Inc.

East – Pennsylvania
800-233-4210
Fax 800-854-4146

Midwest – Missouri
800-211-4607
Fax 800-211-4608

Southwest – Texas
866-693-6903
Fax 866-693-6904

West – Nevada
800-722-4210
Fax 800-248-3620

www.topnotchinc.com

sales@topnotchinc.com


FA Series — Levers

Specifications


- Applications:** Residential single and multi-family doors.
- Certifications:** ANSI A156.2, 1996, **Series 4000** Grade 2.
- Exposed trim:** Levers are zinc based, plated to match finishes indicated.
- Keying:** Two nickel silver cut keys per lock. five-pin, C section.
- Door range:** 1³/₈" to 1³/₄".
- Backset:** Dual backset latches, fits either 2³/₈" or 2³/₄" backsets.

Standard features


- Unique chassis design allows for reversible levers, eliminating the need for handed products.
- Surpass all ANSI Grade 2 standards for strength and security.
- Three piece assembly for easy installation.
- Removable trim and levers for easy upgrade or remodel.
- Variety of finishes and functions.
- Triple Option latches and universal backsets for effortless installation.
- Lifetime Limited Finish and Mechanical Warranties.
- Can be rekeyed to match Schlage, Dexter or other locks.
- Concealed screws.




CALLINGTON



CHAMPAGNE



MERANO



ST. ANNES



Finishes

Levers	505	605	609	613	619	620	622	625	626	716
CALLINGTON	•	•	•	•	•	•	•	•	•	•
CHAMPAGNE	•	•	•	•	•	•	•	•	•	•
MERANO					•		•	•	•	•
ST. ANNES	•	•	•	•	•	•		•	•	•



Top Notch Distributors, Inc.

East – Pennsylvania
800-233-4210
Fax 800-854-4146

Midwest – Missouri
800-211-4607
Fax 800-211-4608

Southwest – Texas
866-693-6903
Fax 866-693-6904

West – Nevada
800-722-4210
Fax 800-248-3620












www.topnotchinc.com

sales@topnotchinc.com



FA Series Knobs/Levers — Functions

ANSI A156.2, 1996, Series 4000 KEYED AND NON-KEYED LOCKS

SCHLAGE	Knobs	Levers	Description
FA10			Passage Latch Both knob/lever always unlocked.
FA30			Patio Lock Pushbutton locking. Turning inside knob releases button.
FA40			Bath/Bedroom Privacy Lock Pushbutton locking. Can be opened from outside with a small tool. Turning inside knob/lever releases pushbutton. Closing door on all except F40 also releases button.
FA51			Entrance Lock Unlocked by key from outside when outer knob/lever is locked by turn-button in inside knob/lever. Inside knob/lever always unlocked.
FA54			Entrance Lock Unlocked by key from outside when outer knob is locked by turn-button in inside knob. Inside knob fixed when locked.
FA80			Storeroom Lock Outside knob always locked. Entrance by key only. Inside knob always unlocked.
FA170			Single Dummy Trim Single dummy trim for one side of door. Used for door pull or as matching inactive trim.

FA SERIES DEADBOLT CYLINDER OPTIONS:

- STANDARD PIN AND TUMBLER
- SECURE KEY



Top Notch Distributors, Inc.

East – Pennsylvania
800-233-4210
Fax 800-854-4146

Midwest – Missouri
800-211-4607
Fax 800-211-4608

Southwest – Texas
866-693-6903
Fax 866-693-6904

West – Nevada
800-722-4210
Fax 800-248-3620

www.topnotchinc.com

sales@topnotchinc.com

FA Series — Entrance Handlesets

Specifications

Applications: Residential single and multi-family entrance doors.

Certifications: ANSI A156.5, 2001,
Grade 2 Auxiliary lock.

Exposed Trim: Outside trim: Handlesets are solid forged brass;
wrought brass trim rings with concealed security
inserts.
Inside trim: Wrought brass; levers are pressure-cast
zinc, plated to match finishes indicated.

Interior Trim: The one piece outside handleset designs can be combined
with a one or two piece interior trim. The Venice, Florence and
Monaco offer a one-piece interior and the Ashcroft, Chantilly
and Kent offer a two piece interior.

Keying: Four nickel silver cut keys per lock.
five-pin, C section.

Door Range: 1³/₈" to 2".

Backset: Universal for 2³/₈" or 2³/₄" backsets.

Standard features

- ANSI Grade 2 designation for Maximum Security performance.
- Can be rekeyed to match Schlage, Dexter or other locks.
- Solid 1 piece deadbolt design with 1 deadbolt and hardened steel
core – resists sawing and protects against hammer and crowbar
attacks.
- Durable deadbolt design with hidden spin ring – provides maximum
security against hammer and wrench attacks.
- Pick resistant cylinders with nickel-silver pins – protects against
picking and tampering and provides maximum durability.
- 3" screws and steel door frame reinforcers – provides maximum
protection against violent forced – entry attacks.
- Triple Option latches and universal backsets for effortless
installation.
- Lifetime Limited Finish and Mechanical Warranties on all handlesets.

Finishes

Handlesets	505	605	609	613	619	620	622	625	626	716
WAKEFIELD	•	•	•	•	•	•	•	•	•	•
CHANTILLY	•	•	•	•	•	•	•	•	•	•
SUTTON	•	•	•	•	•	•	•	•	•	•
MONTICELLO	•	•	•	•	•	•	•	•	•	•
ASHCROFT	•	•	•	•	•	•	•	•	•	•
KENT	•	•	•	•	•	•	•	•	•	•
VENICE	•	•	•	•	•	•	•	•	•	•
FLORENCE	•	•	•	•	•	•	•	•	•	•
MONACO	•	•	•	•	•	•	•	•	•	•

VENICE




ASHCROFT



FA Series — Entrance Handlesets

CHANTILLY

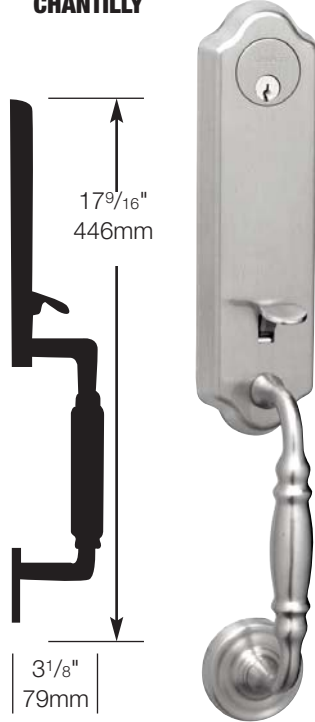

WAKEFIELD



KENT



MONTICELLO



SUTTON



Inside knob and lever options for handlesets



**ANDOVER
KNOB**



**ST. ANNES
LEVER**



**DANBURY
KNOB**



**CALLINGTON
LEVER**



**CHAMPAGNE
LEVER**



Top Notch Distributors, Inc.

East — Pennsylvania
800-233-4210
Fax 800-854-4146

Midwest — Missouri
800-211-4607
Fax 800-211-4608

Southwest — Texas
866-693-6903
Fax 866-693-6904


West — Nevada
800-722-4210
Fax 800-248-3620

www.topnotchinc.com

sales@topnotchinc.com



FA Series — Entrance Handlesets

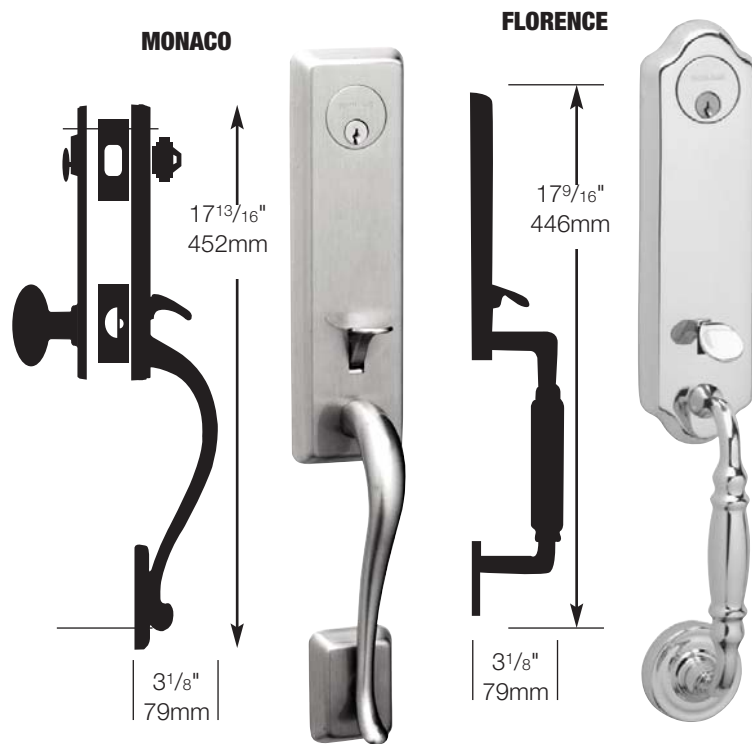

Inside knob and lever options for handlesets



**ANDOVER
KNOB**



**ST. ANNES
LEVER**



**DANBURY
KNOB**



**CALLINGTON
LEVER**



**CHAMPAGNE
LEVER**





FA Series — Entrance Handlesets Functions

ANSI A156.5, 2001

SCHLAGE

Description

FA358



Exterior Entrance Lock

Outside grip and deadbolt trim of FA360.


FA359



Interior Entrance Lock

Inside trim, deadbolt, latch, screws and strikes of FA360

FA360

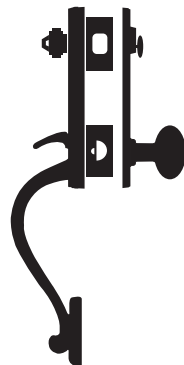

Entrance Lock

Deadbolt thrown or retracted by key from outside or by inside urn unit. Latch retracted by thumbpiece from outside or by inside knob/lever.



Top Notch Distributors, Inc.

East – Pennsylvania
800-233-4210
Fax 800-854-4146

Midwest – Missouri
800-211-4607
Fax 800-211-4608

Southwest – Texas
866-693-6903
Fax 866-693-6904

West – Nevada
800-722-4210
Fax 800-248-3620

www.topnotchinc.com

sales@topnotchinc.com

FA Series — Entrance Handlesets Functions

ANSI A156.5, 2001

SCHLAGE

F362†



Description

Double Cylinder Entrance Lock

Deadbolt thrown or retracted by key from either side. Latch retracted by thumbpiece from outside or by inside knob/lever.

FA392



Outside Half of Dummy Handset

For use as a door pull or as dummy trim on inactive leaf of pair of doors. Fixed thumbpiece with dummy cylinder.

FA394



Inside Half of Dummy Handset

For use as a door pull or as dummy trim on inactive leaf of pair of doors. Fixed knob/lever with inside thumb plate.

CYLINDER OPTIONS:

- STANDARD PIN AND TUMBLER
- SECURE KEY

† **Caution:** Double-cylinder locks on residences and any door in any structure which is used for egress are a safety hazard in times of emergency, and their use is not recommended. Installation should be in accordance with existing codes only.



Top Notch Distributors, Inc.

East – Pennsylvania
800-233-4210
Fax 800-854-4146

Midwest – Missouri
800-211-4607
Fax 800-211-4608

Southwest – Texas
866-693-6903
Fax 866-693-6904

West – Nevada
800-722-4210
Fax 800-248-3620



Keypad Locks

FE575 KEYPAD ENTRY WITH AUTO-LOCK FEATURE

No more keys to hide, lose, carry or forget

Specifications

- Applications:** Residential single and multi-family doors.
- Certifications:** ANSI A 156.2, 2003 bored locks and latches.
- Door Range:** 1 $\frac{3}{8}$ " to 1 $\frac{3}{4}$ ".
- Keys:** Nickel silver cut keys, five pin, C-section.
- Codes:** Pre-set random six-digit programming code, two pre-set four digit user codes(19 code capacity).
- Backset:** Universal backset, fits 2 $\frac{3}{8}$ " to 2 $\frac{3}{4}$ " backsets.

Standard features

- Surpass all ANSI Grade 2 standards for strength and security.
- Patented commercial grade clutching motor drive: tested to one million cycles.
- Vandal resistant clutching lever and knob design.
- Code control; six-digit programming code required to add and delete user codes.
- Warning sounds after four incorrect codes entered; keypad disabled for 30 seconds.
- Mechanical key override; patent pending.
- Silicone rubber, wear-resistant buttons with LED backlight.
- Automatically re-locks every time.
- One tool installation.
- Fits standard door preps.



Inside knob and lever options for Plymouth



Finishes

Exterior	Interior	505	609	613	619	620	625	626	716
PLYMOUTH	PLYMOUTH	•							
PLYMOUTH	FLAIR	•	•	•	•	•	•	•	•
PLYMOUTH	ELAN								•
PLYMOUTH	JAZZ								•
CAMELOT	ACCENT	•	•	•	•	•	•	•	•



Top Notch Distributors, Inc.

East – Pennsylvania
800-233-4210
Fax 800-854-4146

Midwest – Missouri
800-211-4607
Fax 800-211-4608

Southwest – Texas
866-693-6903
Fax 866-693-6904

West – Nevada
800-722-4210
Fax 800-248-3620

www.topnotchinc.com

sales@topnotchinc.com



Keypad Locks

FE595 KEYPAD ENTRY WITH FLEX-LOCK FEATURE

No more keys to hide, lose, carry or forget

Specifications

- Applications:** Residential single and multi-family doors.
- Certifications:** ANSI A 156.2, 2003 bored locks and latches.
- Door Range:** 1 $\frac{3}{8}$ " to 1 $\frac{3}{4}$ ".
- Keys:** Nickel silver cut keys, five pin, C-section.
- Codes:** Pre-set random six-digit programming code, two pre-set four digit user codes(19 code capacity).
- Backset:** Universal backset, fits 2 $\frac{3}{8}$ " to 2 $\frac{3}{4}$ " backsets.

Standard features

- Surpass all ANSI Grade 2 standards for strength and security.
- Patented commercial grade clutching motor drive: tested to one million cycles.
- Vandal resistant clutching lever and knob design.
- Code control; six-digit programming code required to add and delete user codes.
- Warning sounds after four incorrect codes entered; keypad disabled for 30 seconds.
- Mechanical key override; patent pending.
- Silicone rubber, wear-resistant buttons with LED backlight.
- Quickly switches between unlocked or auto-lock.
- One tool installation.
- Fits standard door preps.



PLYMOUTH x PLYMOUTH



Inside lever options for Plymouth



ELAN



FLAIR



JAZZ



Camelot x Georgian



Inside lever options for Camelot



ACCENT

Finishes

Exterior	Interior	505	609	613	619	620	625	626	716
PLYMOUTH	PLYMOUTH	•							
PLYMOUTH	FLAIR	•	•	•	•	•	•	•	•
PLYMOUTH	ELAN								•
PLYMOUTH	JAZZ								•
CAMELOT	ACCENT	•	•	•	•	•	•	•	•
CAMELOT	GEORGIAN	•	•		•				



Top Notch Distributors, Inc.

East – Pennsylvania
800-233-4210
Fax 800-854-4146

Midwest – Missouri
800-211-4607
Fax 800-211-4608

Southwest – Texas
866-693-6903
Fax 866-693-6904

West – Nevada
800-722-4210
Fax 800-248-3620

www.topnotchinc.com

sales@topnotchinc.com



Keypad Deadbolts

BE365 KEYPAD DEADBOLT with TURN-LOCK FEATURE

No more keys to hide, lose, carry or forget

Specifications

- Applications:** Residential single and multi-family doors.
- Certifications:** A 156.5 Grade 2 auxiliary locks.
- Door Range:** 1 $\frac{3}{8}$ " to 1 $\frac{3}{4}$ ".
- Keys:** Nickel silver cut keys, five pin, C-section.
- Codes:** Pre-set random six-digit programming code, two pre-set four digit user codes(19 code capacity).
- Backset:** Adjustable backset, fits 2 $\frac{3}{8}$ " to 2 $\frac{3}{4}$ " backsets.

Standard features

- Surpass all ANSI Grade 2 standards for strength and security.
- Patented commercial grade clutching motor drive: tested to one million cycles.
- Vandal resistant free-spinning deadbolt turn.
- Code control; six-digit programming code required to add and delete user codes.
- Warning sounds after four incorrect codes entered; keypad disabled for 30 seconds.
- Mechanical key override; patent pending.
- Silicone rubber, wear-resistant buttons with LED backlight.
- One tool installation.
- Fits standard door preps.



PLYMOUTH



CAMELOT

Finishes

Keypad Deadbolts	505	609	613	619	620	625	626	716
PLYMOUTH	•	•	•	•	•	•	•	•
CAMELOT	•	•	•	•	•	•	•	•



Top Notch Distributors, Inc.

East – Pennsylvania
800-233-4210
Fax 800-854-4146

Midwest – Missouri
800-211-4607
Fax 800-211-4608

Southwest – Texas
866-693-6903
Fax 866-693-6904

West – Nevada
800-722-4210
Fax 800-248-3620

www.topnotchinc.com

sales@topnotchinc.com



Keypad Deadbolts

FE285 KEYPAD FRONT ENTRY – BOTTOM HALF HANDLESET

No more keys to hide, lose, carry or forget

Specifications

- Applications:** Residential single and multi-family doors.
- Certifications:** A 156.5 Grade 2 auxiliary locks.
- Door Range:** 1 $\frac{3}{8}$ " to 1 $\frac{3}{4}$ ".
- Keys:** Nickel silver cut keys, five pin, C-section.
- Codes:** Pre-set random six-digit programming code, two pre-set four digit user codes(19 code capacity).
- Backset:** Adjustable backset, fits 2 $\frac{3}{8}$ " to 2 $\frac{3}{4}$ " backsets.

Standard features

- Surpass all ANSI Grade 2 standards for strength and security.
- Patented commercial grade clutching motor drive: tested to one million cycles.
- Vandal resistant free-spinning deadbolt turn.
- Code control; six-digit programming code required to add and delete user codes.
- Warning sounds after four incorrect codes entered; keypad disabled for 30 seconds.
- Mechanical key override; patent pending.
- Silicone rubber, wear-resistant buttons with LED backlight.
- One tool installation.
- Fits standard door preps.



Finishes

Exterior	Interior	505	609	613	619	620	625	626	716
PLYMOUTH	PLYMOUTH	•		•	•				•
PLYMOUTH	FLAIR	•	•	•	•	•	•	•	•
CAMELOT	ACCENT	•			•	•			•
CAMELOT	GEORGIAN	•	•		•				•



Top Notch Distributors, Inc.

East – Pennsylvania
800-233-4210
Fax 800-854-4146

Midwest – Missouri
800-211-4607
Fax 800-211-4608

Southwest – Texas
866-693-6903
Fax 866-693-6904

West – Nevada
800-722-4210
Fax 800-248-3620

www.topnotchinc.com


sales@topnotchinc.com

BE/FE Keypad Locks - Functions

ANSI A156.5, 2001

SCHLAGE

BE365



Description

Keypad Deadbolt

Deadbolt thrown from outside by keyway turn after pressing Schlage button or by inside thumbturn. Deadbolt retracted from outside by entering valid user code then rotating keyway turn or by inside thumbturn. Key can be used to unlock as back-up.

FE285



Lower Half – Front Entry Set

Combine with BE365 keypad deadbolt for front entry set.


FE575



Keypad Entry with Auto-Lock

Auto locking, automatically re-locks after 5 seconds. Unlocked by valid user code from outside. Inside lever always unlocked. Key can be used to unlock as back-up.

FE595



Keypad Entry with Flex-Lock

Flex locking, switch between unlocked or automatic re-locking. Unlocked by valid user code from outside. Key can be used to unlock as back-up.



Keypad Deadbolt and Lock, Light Module

KEYPAD DEADBOLT AND LOCK

FEATURES

The **Schlage LiNK Wireless Keypad Deadbolt** can be added to a Z-wave network within your home. Installation and set up are simple. When paired with the Schlage wirelss bridge, the deadbolt lock is securely connected to the internet. Web-based access means greater peace of mind, no matter where you travel.

Uses 128 bit AES encryption for security

Remotely unlock the door

Assign up to 19 personalized 4 digit codes for each member of your household to use at the door

Keypad deadbolt has up to 3 years of battery life and pProvides battery level status at the lock and via the web

Easily program Schalge LiNK to send automatic text or email updates so you'll always know who's home



BE369

The **Schalge LiNK starter kit** includes everything you need to create your own remote access solution.

Includes: one Shclage Wireless Keypad Lock, One Schalge Wireless Bridge, one Schlage Light Module, one internet cabel and batteries.



FE599GR

Model

Number	Finish	Description
BE369	505, 619,716	LiNK Keypad Deadbolt
FE599	505, 619, 716	LiNK Keypad Lock
BE369GR	505, 619, 716	LiNK Keypad Deadbolt Starter Kit
FE599GR	505, 619, 716	LiNK Keypad Lock Starter Kit

LIGHT MODULE

FEATURES

Control tabble and floor lamps remotely through the Schlage LiNK web protal with Z-Wave enabled light module. With Schlage LiNK, have lights automatically turn on inside your house when you enter your code at the door. Program your Schlage LiNK solution to autmoatically turn lights on and off while you are away on vacation. Expands the Schlage LiNK Z-Wave wirelss network in your home by extending the systems range. Compatible with standard incandenscent lighting only. The light module provides one Z-wave controlled AC outlet and one standard AC outlet. Turn lights off, on and dim with the Schlage Light Module. Schlage light module supports Z-wave beaming protocol. For Incandescent lighting only.



RP200





Thermostat & Network Cameras

TRANE REMOTE ENERGY MANAGEMENT THERMOSTAT

FEATURES

TRANE REMOTE ENERGY MANAGEMENT THERMOSTAT can be added to the Z-wave network within your home. Add the Trane Remote Energy Management Thermostat to your Schlage LiNK system to remotely monitor and control your thermostat from anywhere with any internet enabled computer and most internet enabled cell phones. Actively manage the energy use within your home and reduce energy consumption up to 15% with the energu savings schedule. When paired with the Schlage wireless bridge, utilize advanced thermostat features through the Schlage LiNK web protal. Energy Star compliant

ADVANCED FEATURES

Receive text message or mail alerts when unwanted adjustments are made to the temperature settings in your home. Remotely control your home's heating and cooling through Schlage LiNK web portal 7 day programming thermostat with up to 4 settings per day. Remotely enable the energy saving mode for extra savings when on vacation or away from home. When paired with the Schlage wireless bridge, set up is simple - you'll be up and running quickly. HVAC System Type: Compatible with all brands of central heating, cooling and heat pumps systems. Power: 24 Vac from HVAC. Graphical LCD Display



TZEMT400AB32MA

NETWORK CAMERAS

FEATURES

The Schlage LiNK Network cameras allow you to remotely monitor your home allowing you to stay in touch and in control.

View live video from anywhere with any internet enabled computer and most internet enabled cell phones.

Securly connects to the web via your computer and requires a Schlage LiNK account video functionality.

Installation and set up are simple - you'll be up and running quickly.

MODEL

WCE100 - Wired Network Camera

Includes: one Schlage IP Wired Color Camera

- One mounting bracket
- oe 6 ft. Ethernet cable
- A/C power Adapter
- VAGA Resolution (640 x 480)

MODEL

WCW100 - Wireless Network Camera

Includes: one Schlage IP Wireless Color Camera

- One mounting bracket
- A/C power Adapter
- VAGA Resolution (640 x 480)



Top Notch Distributors, Inc.

East – Pennsylvania
800-233-4210
Fax 800-854-4146

Midwest – Missouri
800-211-4607
Fax 800-211-4608

Southwest – Texas
866-693-6903
Fax 866-693-6904

West – Nevada
800-722-4210
Fax 800-248-3620

www.topnotchinc.com

sales@topnotchinc.com

Note:

