

UDIP[®]

ULTRA DYNAMIC
HOSE PRODUCTS

HOSE & TUBING
CATALOG 2019



A DIVISION OF
ABBOTT RUBBER
COMPANY, INC.






Hose assemblies fabricated to customer requirements - our specialty. Let us know what your requirements are.



Complete packaging services available. Bagging, tagging and bar coding are just a few of the value added services we offer.

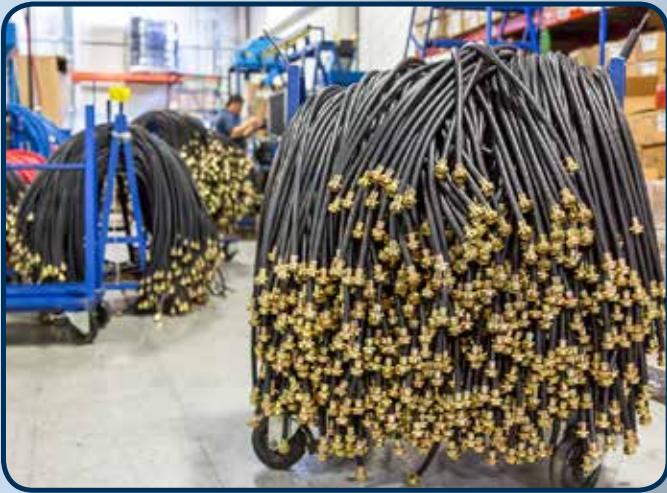

Producing hose assemblies in large quantities is a daily routine.



Inventory on-hand to service our customer needs. Large stocks for immediate shipment.



Inspection and quality is paramount with unparalleled customer service.



Shipping to customers world-wide with world-class hose and tubing products.



800-852-1855

www.udproducts.com



**ULTRA DYNAMIC
HOSE PRODUCTS**



**SERVING THE RETAIL MARKETPLACE WITH QUALITY INDUSTRIAL
AND SPECIFICATION GRADE HOSE & TUBING PRODUCTS**

INDEX

Item	Description	Page	Item	Description	Page
T10	Clear Vinyl Tubing	4-5	T36	Economy PVC Discharge Hose	12
T12	Braided Vinyl Tubing	6	T38	Reinforced PVC Discharge Hose	12
T14	Black Vinyl Tubing	6	T44	PVC Appliance Drain Hose	13
T16	Polyethylene Tubing	7	T45	Non-Reinforced PVC Drain Hose	13
T17	Black Polyethylene Tubing	7	T60	Red Rubber Utility Hose	14
T18	Red PVC Air/Water Hose	8	T62	Heater Hose	14
T22	PVC Fuel Hose	8	T64	Latex Tubing	15
T24	Micro Fuel Tubing	9	T68	Vacuum Tubing	15
T28	Vinyl Garden Hose	9	R80	Gasket Material	16
T30	Spa Hose	10	TRK	Spool & Dispenser Rack	17-18
T32	Pool Vacuum Hose	10	WA/WD	Appliance Hose	19-22
T34	Bilge Hose	11	HA74	Air Hose Assemblies	23
T40	Clear PVC Suction Hose	11	HA84	Water Hose Assemblies	23

A DIVISION OF
ABBOTT RUBBER
COMPANY, INC.



800-852-1855

www.udproducts.com

CLEAR VINYL TUBING

T10 SERIES



Clear PVC tubing manufactured with non-toxic FDA compounds. Can be used for flexible lines for low pressure air, water, liquids, beverages, chemicals and gases as well as drain lines for air conditioners and dehumidifiers. Excellent resistance to mild acids and chemicals. See through design allows for visual flow. Not for use with ice makers or petroleum based products.

- Non-toxic FDA grade compound
- Suitable for use with liquids, chemicals and gases
- Use as flexible drain line
- For use with hose barbs and clamps
- Temperature range +25°F to +150°F



Part Number	I.D. (in)	O.D. (in)	Length (ft.)	Pressure @ 70°F	Package Info & Dimensions			
					Type	L x W x H (in)	Weight (pkg/lbs.)	UPC
T10004001	1/8	3/16	100	30 PSI	Boxed	9.5 x 3 x 9.5	1.40	708289450188
T10004002	1/8	1/4	100	65 PSI	Boxed	9.5 x 3 x 9.5	3.10	708289450683
T10004003	.170	1/4	100	40 PSI	Boxed	9.5 x 3 x 9.5	2.00	708289451185
T10004004	3/16	5/16	100	55 PSI	Boxed	9.5 x 3 x 9.5	3.20	708289451680
T10004005	1/4	3/8	100	55 PSI	Boxed	14 x 4 x 14	3.90	708289452182
T10004006	5/16	7/16	100	50 PSI	Boxed	14 x 4 x 14	5.20	708289452687
T10004007	5/16	1/2	100	55 PSI	Boxed	14 x 4 x 14	7.10	708289453189
T10004008	3/8	1/2	100	45 PSI	Boxed	14 x 4 x 14	5.50	708289453684
T10004009	3/8	9/16	100	50 PSI	Boxed	14 x 4 x 14	7.90	708289454186
T10004010	1/2	5/8	100	30 PSI	Boxed	14 x 4 x 14	6.40	708289454681
T10004011	1/2	3/4	100	45 PSI	Boxed	17 x 5 x 17	13.10	708289455183
T10004013	5/8	7/8	100	40 PSI	Boxed	17 x 5 x 17	15.80	708289456180
T10004014	3/4	1	50	35 PSI	Boxed	17 x 5 x 17	9.40	708289456685
T10004015	1	1-1/4	50	25 PSI	Boxed	18 x 6 x 18	12.70	708289457286
T10004016	1 1/4	1 5/8	50	30 PSI	Boxed	18 x 6 x 18	16.30	708289457880
T10004017	1 1/2	1 7/8	25	30 PSI	Boxed	18 x 6 x 18	14.20	708289458184
T10005001	1/8	3/16	400	30 PSI	Spool	7 x 10	5.60	708289450287
T10005002	1/8	1/4	400	65 PSI	Spool	7 x 10	7.60	708289450782
T10005003	.170	1/4	400	40 PSI	Spool	7 x 10	7.20	708289451284
T10005004	3/16	5/16	300	55 PSI	Spool	7 x 10	9.00	708289451789
T10005005	1/4	3/8	250	55 PSI	Spool	7 x 10	10.30	708289452281
T10005006	5/16	7/16	200	50 PSI	Spool	7 x 10	9.70	708289452786
T10005007	5/16	1/2	150	55 PSI	Spool	7 x 10	9.20	708289453288
T10005008	3/8	1/2	100	45 PSI	Spool	7 x 10	5.50	708289453783
T10005009	3/8	9/16	100	50 PSI	Spool	7 x 10	8.20	708289454285
T10005010	1/2	5/8	100	30 PSI	Spool	7 x 10	6.90	708289454780
T10005011	1/2	3/4	75	45 PSI	Spool	7 x 10	9.90	708289455282
T10005012	5/8	3/4	100	25 PSI	Spool	7 x 10	8.20	708289455787
T10005013	5/8	7/8	100	40 PSI	Spool	11.5 x 10	16.20	708289456289
T10005015	1	1-1/4	50	25 PSI	Spool	7 x 16	13.80	708289457385

CLEAR VINYL TUBING

T10 SERIES



- Non-toxic FDA grade compound
- Suitable for use with liquids, chemicals and gases
- Use as flexible drain line
- For use with hose barbs and clamps
- Temperature range +25°F to +150°F



Part Number	I.D. (in)	O.D. (in)	Length (ft.)	Pressure @ 70°F	Package Info & Dimensions			
					Type	L x W x H (in)	Weight (pkg/lbs.)	UPC
T10005016	1¼	1⅝	50	30 PSI	Spool	7 x 21	17.90	708289457989
T10005017	1½	1⅞	50	30 PSI	Spool	7 x 21	31.70	708289458283
T10006003	.170	1/4	10	40 PSI	Coil	-	0.18	708289451383
T10006005	1/4	3/8	10	55 PSI	Coil	-	0.37	708289452380
T10006008	3/8	1/2	10	45 PSI	Coil	-	0.54	708289453882
T10006010	1/2	5/8	10	30 PSI	Coil	-	0.69	708289454889
T10006011	1/2	3/4	10	45 PSI	Coil	-	1.32	708289455381
T10006013	5/8	7/8	10	40 PSI	Coil	-	1.52	708289456388
T10006014	3/4	1	10	35 PSI	Coil	-	1.88	708289456982
T10007003	.170	1/4	20	40 PSI	Coil	-	0.36	708289451482
T10007004	3/16	5/16	20	55 PSI	Coil	-	0.59	708289451987
T10007005	1/4	3/8	20	55 PSI	Coil	-	0.74	708289452489
T10007006	5/16	7/16	20	50 PSI	Coil	-	0.88	708289452984
T10007008	3/8	1/2	20	45 PSI	Coil	-	1.08	708289453981
T10015005	1/4	3/8	100	55 PSI	Spool	7 x 10	4.20	708289491082
T10015011	1/2	3/4	100	45 PSI	Spool	7 x 10	14.10	708289491181
T10015015	1	1¼	100	25 PSI	Spool	7 x 21	29.70	708289457484
T10025001	1/8	3/16	200	30 PSI	Spool	7 x 10	2.60	708289490887
T10055014	3/4	1	50	35 PSI	Spool	11.5 x 10	10.20	708289456784
T10075014	3/4	1	75	35 PSI	Spool	11.5 x 10	15.30	708289456883

COILS AVAILABLE IN CUT CASE PACKAGING



BRAIDED VINYL TUBING

T12 SERIES



Clear PVC tubing reinforced with spiral polyester for use in pressure applications. Manufactured with non-toxic FDA compounds. Use for flexible lines for air, water, liquids, beverages, and gases as well as drain lines for air conditioners and dehumidifiers where higher pressure or tubing wall stability is required. Excellent resistance to mild acids and chemicals. See through design allows for visual flow. Not for use with ice makers or petroleum based products.

- Non-toxic FDA grade compound
- Clear with polyester reinforcement
- Suitable for use with liquids, chemicals and gases
- Higher pressure ratings
- For use with hose barbs and clamps
- Temperature range +25°F to +150°F



Part Number	I.D. (in)	O.D. (in)	Length (ft.)	Pressure @ 70°F	Package Info & Dimensions			
					Type	L x W x H (in)	Weight (pkg/lbs.)	UPC
T12004001	1/4	7/16	100	250 PSI	Boxed	14 x 4 x 14	8.40	708289458788
T12004002	3/8	19/32	100	225 PSI	Boxed	14 x 4 x 14	11.50	708289459280
T12004003	1/2	3/4	100	200 PSI	Boxed	17 x 5 x 17	14.00	708289459785
T12004004	5/8	7/8	100	200 PSI	Boxed	17 x 5 x 17	15.80	708289460286
T12004005	3/4	1	50	150 PSI	Boxed	17 x 5 x 17	20.00	708289460781
T12004006	1	1 1/4	50	125 PSI	Boxed	18 x 6 x 18	23.00	708289461283
T12004007	1 1/4	1 5/8	50	100 PSI	Boxed	18 x 6 x 18	25.30	708289461788
T12005001	1/4	7/16	250	250 PSI	Spool	11.5 x 10	21.00	708289458887
T12005002	3/8	19/32	150	225 PSI	Spool	11.5 x 10	17.00	708289459389
T12005003	1/2	3/4	100	200 PSI	Spool	11.5 x 10	14.00	708289459884
T12005004	5/8	7/8	75	200 PSI	Spool	11.5 x 10	12.00	708289460385
T12005005	3/4	1	75	150 PSI	Spool	11.5 x 10	15.00	708289460880
T12005006	1	1 1/4	50	125 PSI	Spool	7 x 21	17.00	708289461382
T12005007	1 1/4	1 5/8	50	100 PSI	Spool	7 x 21	29.00	708289461887
T12005008	1 1/2	2	50	100 PSI	Spool	7 x 21	31.30	708289462280
T12006004	5/8	7/8	10	200 PSI	Coil	-	1.47	708289460484
T12015004	5/8	7/8	100	200 PSI	Spool	11.5 x 10	16.00	708289491280
T12025007	1 1/4	1 5/8	25	100 PSI	Spool	7 x 21	14.00	708289491389
T12025008	1 1/2	2	25	100 PSI	Spool	7 x 21	15.60	708289491587
T12055005	3/4	1	50	150 PSI	Spool	11.5 x 10	10.00	708289491488

BLACK VINYL TUBING

T14 SERIES



Black PVC tubing manufactured with non-toxic compounds. Used for low open-end water drain lines. UV and ozone resistant for color stabilization. Not for use with ice makers or petroleum based products. For California Residents: ⚠️ **WARNING:** Cancer and Reproductive Harm – www.P65Warnings.ca.gov

- Non-toxic PVC compound
- General purpose grade
- Suitable for use with liquids, chemicals and gases
- Use as flexible drain line
- For use with hose barbs and clamps
- Temperature range +25°F to +150°F



Part Number	I.D. (in)	O.D. (in)	Length (ft.)	Pressure @ 70°F	Package Info & Dimensions			
					Type	L x W x H (in)	Weight (pkg/lbs.)	UPC
T14005002	3/8	1/2	100	45 PSI	Spool	7 x 10	6.40	708289463584
T14005003	1/2	5/8	100	30 PSI	Spool	7 x 10	6.90	708289464086
T14005005	3/4	1	100	35 PSI	Spool	11.5 x 10	19.60	708289464581

POLYETHYLENE TUBING

T16 SERIES

Natural non-toxic FDA grade translucent polyethylene tubing. Economical and lightweight, used for pneumatic control lines and liquids in industrial applications. Also use for water and water softener lines. Resistant to many solvents, acids, alkalis, and gases. Excellent choice for use with ice makers.



- Non-toxic FDA grade compound
- Translucent milky white color
- Suitable for use with air and water lines
- Use as pneumatic control line
- For use with compression style fittings
- Temperature range -40°F to +150°F

Part Number	I.D. (in)	O.D. (in)	Length (ft.)	Pressure @ 70°F	Package Info & Dimensions			
					Type	L x W x H (in)	Weight (pkg/lbs.)	UPC
T16004001	.170	1/4	100	140 PSI	Boxed	9.5 x 3 x 9.5	2.10	708289465489
T16004002	3/16	5/16	100	130 PSI	Boxed	9.5 x 3 x 9.5	3.30	708289466080
T16004003	1/4	3/8	100	120 PSI	Boxed	14 x 4 x 14	2.90	708289466585
T16004004	3/8	1/2	100	100 PSI	Boxed	14 x 4 x 14	4.00	708289467087
T16004005	1/2	5/8	100	85 PSI	Boxed	14 x 4 x 14	5.30	708289467582
T16005001	.170	1/4	400	140 PSI	Spool	7 x 10	5.10	708289465588
T16005002	3/16	5/16	300	130 PSI	Spool	7 x 10	7.50	708289466189
T16005003	1/4	3/8	300	120 PSI	Spool	7 x 10	9.10	708289466684
T16005004	3/8	1/2	200	100 PSI	Spool	11.5 x 10	7.20	708289467186
T16005005	1/2	5/8	100	85 PSI	Spool	11.5 x 10	7.50	708289467681
T16007001	.170	1/4	25	140 PSI	Coil	-	0.29	708289465786
T16007003	1/4	3/8	25	120 PSI	Coil	-	0.75	708289466882
T16015003	1/4	3/8	100	120 PSI	Spool	7 x 10	3.10	708289491686
T16025001	.170	1/4	200	140 PSI	Spool	7 x 10	2.60	708289491785



BLACK POLYETHYLENE TUBING

T17 SERIES

Opaque black non-toxic polyethylene tubing suitable for pneumatic control lines and water lines in industrial applications. Resistant to many solvents, acids, alkalis, and gases.



- Non-toxic LDPE compound
- Opaque black color
- Suitable for use with air and water lines
- Use as pneumatic control line
- For use with compression style fittings
- Temperature range -40°F to +150°F

Part Number	I.D. (in)	O.D. (in)	Length (ft.)	Pressure @ 70°F	Package Info & Dimensions			
					Type	L x W x H (in)	Weight (pkg/lbs.)	UPC
T17005001	.170	1/4	400	140 PSI	Spool	7 x 10	5.10	708289468183



RED PVC AIR/SPRAY HOSE

T18 SERIES



Red cover reinforced flexible PVC hose for air, water and spray applications. Contractor grade construction for pressures to 300 PSI. Non-marking abrasion resistant cover.

For California Residents: **▲ WARNING:** Cancer and Reproductive Harm – www.P65Warnings.ca.gov

- Reinforced PVC compound
- Abrasion resistant cover
- Suitable for air, water, and spray applications
- Contractor grade
- For use with hose bars and clamps
- Temperature range +25°F to +150°F



Package Info & Dimensions

Part Number	I.D. (in)	O.D. (in)	Length (ft.)	Pressure @ 70°F	Type	L x W x H (in)	Weight (pkg/lbs.)	UPC
T18004001	1/4	1/2	100	300 PSI	Boxed	12.75 x 5 x 11	4.90	708289468589
T18004002	3/8	5/8	100	300 PSI	Boxed	18 x 6 x 18	9.50	708289468985
T18004003	1/2	3/4	50	300 PSI	Boxed	12.75 x 5 x 11	8.00	708289469289
T18005001	1/4	1/2	100	300 PSI	Spool	11.5 x 10	5.70	708289468688
T18005002	3/8	5/8	150	300 PSI	Spool	11.5 x 10	13.90	708289469081
T18005003	1/2	3/4	100	300 PSI	Spool	11.5 x 10	15.00	708289469388
T18025001	1/4	1/2	200	300 PSI	Spool	11.5 x 10	14.60	708289468787

PVC FUEL HOSE

T22 SERIES



Black reinforced PVC hose for use with petroleum based products. Excellent for lawn and garden equipment fuel lines. Not for use in under-hood applications. For California

Residents: **▲ WARNING:** Cancer and Reproductive Harm – www.P65Warnings.ca.gov

- Reinforced thermoplastic compound
- Black color
- Suitable for use with petroleum based products
- Oil and grease resistant
- Not for under-hood applications
- Temperature range +15°F to +150°F



Package Info & Dimensions

Part Number	I.D. (in)	O.D. (in)	Length (ft.)	Pressure @ 70°F	Type	L x W x H (in)	Weight (pkg/lbs.)	UPC
T22004001	3/16	3/8	50	80 PSI	Boxed	12.75 x 3 x 11	4.70	708289469982
T22004002	1/4	1/2	50	80 PSI	Boxed	12.75 x 3 x 11	5.30	708289470483
T22004003	5/16	9/16	50	80 PSI	Boxed	12.75 x 3 x 11	6.40	708289470988
T22004004	3/8	5/8	50	80 PSI	Boxed	12.75 x 3 x 11	7.10	708289471480
T22005001	3/16	3/8	150	80 PSI	Spool	7 x 10	14.20	708289470087
T22005002	1/4	1/2	100	80 PSI	Spool	7 x 10	12.10	708289470582
T22005003	5/16	9/16	100	80 PSI	Spool	7 x 10	12.80	708289471084
T22005004	3/8	5/8	50	80 PSI	Spool	7 x 10	7.40	708289471589
T22007002	1/4	1/2	25	80 PSI	Coil	-	2.80	708289470780
T22007003	5/16	9/16	25	80 PSI	Coil	-	3.10	708289471282
T22007004	3/8	5/8	25	80 PSI	Coil	-	3.50	708289471886
T22055001	3/16	3/8	50	80 PSI	Spool	3.5 x 8	4.90	708289491884
T22055002	1/4	1/2	50	80 PSI	Spool	7 x 10	6.40	708289491983
T22055003	5/16	9/16	50	80 PSI	Spool	7 x 10	6.90	708289492089

MICRO FUEL TUBING

T24 SERIES

Transparent thermoplastic tubing for small diameter gasoline and fuel line applications. Extremely flexible and resistant to weathering, ozone and abrasion. Features a wide temperature range for outdoor applications.



- Thermoplastic blended compound
- Translucent orange color
- Suitable for small tool fuel applications
- Industrial grade
- Abrasion resistant
- Temperature range -40°F to +150°F

					Package Info & Dimensions			
Part Number	I.D. (in)	O.D. (in)	Length (ft.)	Pressure @ 70°F	Type	L x W x H (in)	Weight (pkg/lbs.)	UPC
T24005001	3/32	3/16	100	125 PSI	Spool	3.5 x 8	1.90	708289471985
T24005002	7/64	1/4	100	125 PSI	Spool	3.5 x 8	2.90	708289472081
T24005003	1/8	1/4	100	125 PSI	Spool	3.5 x 8	2.40	708289472180



VINYL GARDEN HOSE

T28 SERIES

Green reinforced PVC garden hose. Flexible and weather resistant use for typical watering and wash down applications. Abrasion resistant cover allows for good service life. For California Residents: ⚠ **WARNING:** Cancer and Reproductive Harm – www.P65Warnings.ca.gov



- Reinforced vinyl compound
- Weather resistant
- Suitable for use in water wash-down applications
- Abrasion resistant
- For use with hose barbs and clamps
- Temperature range +25°F to +150°F

					Package Info & Dimensions			
Part Number	I.D. (in)	O.D. (in)	Length (ft.)	Pressure @ 70°F	Type	L x W x H (in)	Weight (pkg/lbs.)	UPC
T28005001	5/8	7/8	150	125 PSI	Spool	11.5 x 10	18.40	708289472487



SPA HOSE

T30 SERIES



White non-toxic PVC flexible spa hose designed for use with PVC schedule 40 fittings. For spas, jetted hot tubs, and pools. Can also be used for water suction and transfer applications.

- Non-toxic FDA compound
- NSF / IAPMO compliant
- Suitable for use with spas, hot tubs, and swimming pools
- Flexible design
- For use with PVC schedule 40 fittings
- Temperature range 0°F to +150°F

Part Number	I.D. (in)	O.D. (in)	Length (ft.)	Pressure @ 70°F	Package Info & Dimensions			
					Type	L x W x H (in)	Weight (pkg/lbs.)	UPC
T30004002	3/4	1.05	50	100 PSI	Boxed	18 x 6 x 18	11.40	708289501385
T30004003	1	1.31	50	100 PSI	Boxed	18 x 6 x 18	15.50	708289501477
T30004004	1¼	1.66	25	80 PSI	Boxed	18 x 6 x 18	10.20	708289501569
T30004005	1½	1.90	20	65 PSI	Boxed	18 x 6 x 18	10.90	708289501651
T30004006	2	2.38	25	65 PSI	Boxed	21 x 12 x 21	16.70	708289501118
T30005001	1/2	.840	100	100 PSI	Spool	7 x 16	16.00	708289472784
T30005002	3/4	1.05	100	100 PSI	Spool	7 x 16	22.10	708289473088
T30005003	1	1.31	50	100 PSI	Spool	7 x 16	15.00	708289473385
T30005004	1¼	1.66	50	80 PSI	Spool	7 x 21	21.00	708289473682
T30005005	1½	1.90	50	65 PSI	Spool	7 x 21	23.50	708289473989
T30005006	2	2.38	25	65 PSI	Spool	7 x 21	16.00	708289474283



POOL VACUUM HOSE

T32 SERIES



Blue and black pool vacuum hose suitable for home swimming pool vacuum systems. Crushproof copolymer construction is lightweight, floats and is non-marking.

- Flexible UV resistant compound
- Blue / Black color
- Suitable for use with pool vacuums
- Crushproof, abrasion and kink resistant
- End cuffs and connectors available
- Temperature range 0°F to +150°F

Part Number	I.D. (in)	O.D. (in)	Length (ft.)	Pressure @ 70°F	Package Info & Dimensions			
					Type	L x W x H (in)	Weight (pkg/lbs.)	UPC
T32004001	1¼	1.58	25	N/A	Boxed	18 x 6 x 18	3.60	708289500845
T32004002	1½	1.81	25	N/A	Boxed	18 x 6 x 18	4.60	708289500937
T32005001	1¼	1.58	50	N/A	Spool	7 x 21	7.20	708289474481
T32005002	1½	1.81	50	N/A	Spool	7 x 21	9.20	708289474580
T32C00001	1¼	-	1	N/A	Bag	Cuff	0.30	708289474610
T32C00002	1½	-	1	N/A	Bag	Cuff	0.40	708289474658



BILGE HOSE

T34 SERIES



White low density polyethylene bilge hose for marine pump and low pressure discharge applications. Abrasion and kink resistant. Comes with smooth end connections manufactured into the hose every 36 inches for a leak proof connection.

For California Residents: **▲ WARNING:** Cancer and Reproductive Harm – www.P65Warnings.ca.gov

- Low density polyethylene compound
- Milky white color
- Suitable for marine and low pressure discharge
- Abrasion and kink resistant
- For use with hose barbs and clamps
- Temperature range 0°F to +150°F

Part Number	I.D. (in)	O.D. (in)	Length (ft.)	Pressure @ 70°F	Package Info & Dimensions			
					Type	L x W x H (in)	Weight (pkg/lbs.)	UPC
T34005001	3/4	1	50	N/A	Spool	7 x 16	6.20	708289474689
T34005002	1 1/8	1 5/8	50	N/A	Spool	7 x 21	8.00	708289474788
T34005003	1 1/4	1 3/4	50	N/A	Spool	7 x 21	9.00	708289474887
T34005004	1 1/2	2	50	N/A	Spool	7 x 21	9.30	708289474986



CLEAR PVC SUCTION HOSE

T40 SERIES



Clear flexible PVC suction hose with a white rigid PVC helix for full vacuum service. Use with portable pumps for suction or open end discharge applications in construction, agriculture, marine and mining. See-through design allows for visual flow.

- Flexible PVC compound
- Clear body with white helix
- Suitable for use with centrifugal and trash pumps
- Contractor grade
- Convenient see-through design
- Temperature range 0°F to +150°F

Part Number	I.D. (in)	O.D. (in)	Length (ft.)	Pressure @ 70°F	Package Info & Dimensions			
					Type	L x W x H (in)	Weight (pkg/lbs.)	UPC
T40005001	1 1/4	1.50	50	85 PSI	Spool	7 x 21	18.50	708289476782
T40005002	1 1/2	1.85	50	70 PSI	Spool	7 x 21	25.20	708289476980
T40005003	2	2.38	25	65 PSI	Spool	7 x 21	17.90	708289477185



ECONOMY PVC DISCHARGE HOSE

T36 SERIES



Blue color economy PVC discharge hose is an extremely lightweight hose for very low pressure open end water discharge applications. Layflat construction for easy transport and storage.

- Non-reinforced PVC compound
- Blue color
- Suitable for open end low pressure discharge
- Layflat design
- Extremely lightweight
- Temperature range 0°F to +125°F



Part Number	I.D. (in)	O.D. (in)	Length (ft.)	Pressure @ 70°F	Package Info & Dimensions			
					Type	L x W x H (in)	Weight (pkg/lbs.)	UPC
T36005001	1½	1.70	150	25 PSI	Spool	3.5 x 16	12.90	708289475389
T36005002	2	2.20	150	20 PSI	Spool	3.5 x 16	14.50	708289475785

REINFORCED PVC DISCHARGE HOSE

T38 SERIES



Blue reinforced PVC discharge hose is designed for water discharge applications using typical centrifugal and trash pumps. Very durable layflat design. Can be used for drip irrigation.

- Reinforced PVC compound
- Blue color
- Suitable for use with centrifugal and trash pumps
- Durable layflat Design
- Can be used for drip irrigation
- Temperature range 0°F to +170°F



Part Number	I.D. (in)	O.D. (in)	Length (ft.)	Pressure @ 70°F	Package Info & Dimensions			
					Type	L x W x H (in)	Weight (pkg/lbs.)	UPC
T38005001	1½	1.85	150	80 PSI	Spool	3.5 x 16	29.00	708289476188
T38005002	2	2.30	150	80 PSI	Spool	3.5 x 16	37.00	708289476584

PVC APPLIANCE DRAIN HOSE

T44 SERIES



Black PVC appliance drain hose is suitable for use as a flexible dishwasher and washing machine water drain hose. Reinforced with spiral polyester for pressure and stability and is kink resistant. For California Residents: **⚠ WARNING:** Cancer and Reproductive Harm – www.P65Warnings.ca.gov

- Reinforced PVC compound
- Black color
- Suitable for use as dishwasher and washing machine drain
- For use with hose barbs and clamps
- Temperature range +25°F to +150°F



					Package Info & Dimensions			
Part Number	I.D. (in)	O.D. (in)	Length (ft.)	Pressure @ 70°F	Type	L x W x H (in)	Weight (pkg/lbs.)	UPC
T44004001	5/8	7/8	50	150 PSI	Boxed	18 x 6 x 18	10.60	708289477987
T44004003	7/8	1 1/8	50	100 PSI	Boxed	18 x 6 x 18	10.50	708289478984
T44025003	7/8	1 1/8	25	100 PSI	Spool	11.5 x 10	9.30	708289479080
T44055001	5/8	7/8	50	150 PSI	Spool	11.5 x 10	10.20	708289478083

NON REINFORCED PVC DRAIN HOSE

T45 SERIES



Black non-reinforced PVC drain hose for dishwasher and washing machine drain applications. Flexible construction allows for bending without kinking.

- Non-reinforced PVC compound
- Black color
- Suitable for use as dishwasher and washing machine drain
- For use with hose barbs and clamps
- Temperature range +25°F to +150°F



					Package Info & Dimensions			
Part Number	I.D. (in)	O.D. (in)	Length (ft.)	Pressure @ 70°F	Type	L x W x H (in)	Weight (pkg/lbs.)	UPC
T45004005	1	1 1/4	50	25 PSI	Boxed	16 x 6 x 18	13.20	708289500036



RED RUBBER UTILITY HOSE

T60 SERIES



Red utility hose is a high quality multi-purpose hose for air, water and agricultural spray applications used over a wide temperature range. Reinforced with spiral polyester. Hose is heat, ozone and weather resistant EPDM. Do not use with petroleum based products.

For California Residents: **▲ WARNING:** Cancer and Reproductive Harm – www.P65Warnings.ca.gov

- Polyester reinforced
- EPDM rubber
- Heat, ozone and weather resistant
- Suitable for use with air, water and agricultural spray
- Contractor grade
- Limited oil resistance
- Temperature range -40°F to +190°F



Package Info & Dimensions

Part Number	I.D. (in)	O.D. (in)	Length (ft.)	Pressure @ 70°F	Type	L x W x H (in)	Weight (pkg/lbs.)	UPC
T60004100	3/8	5/8	50	200 PSI	Boxed	12.75 x 5 x 11	8.50	708289500487
T60005001	1/2	3/4	100	200 PSI	Spool	11.50 x 10	21.00	708289479981
T60005003	3/4	1 1/8	75	200 PSI	Spool	11.50 x 10	26.50	708289480581

HEATER HOSE

T62 SERIES



Black heater hose that can also be used as a dishwasher and washing machine drain hose. Reinforced with spiral polyester. Very flexible design. Use as a coolant hose in outdoor applications. Not for under hood applications. For California Residents: **▲ WARNING:**

Cancer and Reproductive Harm – www.P65Warnings.ca.gov

- Reinforced synthetic rubber compound
- Heat, ozone and weather resistant
- Suitable for use as dishwasher and washing machine drain hose
- Not for under hood applications
- For use with hose barbs and clamps
- Temperature range -40°F to +190°F



Package Info & Dimensions

Part Number	I.D. (in)	O.D. (in)	Length (ft.)	Pressure @ 70°F	Type	L x W x H (in)	Weight (pkg/lbs.)	UPC
T62004001	1/2	3/4	50	105 PSI	Boxed	12.75 x 5 x 11	9.50	708289481083
T62004002	5/8	7/8	50	80 PSI	Boxed	18 x 6 x 18	11.70	708289481489
T62004003	3/4	1	50	80 PSI	Boxed	18 x 6 x 18	13.40	708289481885
T62005001	1/2	3/4	100	105 PSI	Spool	11.5 x 10	18.60	708289481182
T62005002	5/8	7/8	100	80 PSI	Spool	11.5 x 10	22.90	708289481588
T62005005	1	1 1/8	50	80 PSI	Spool	7 x 16	26.00	708289496971
T62006002	5/8	7/8	10	80 PSI	Coil	-	2.20	708289481687
T62006003	3/4	1	10	80 PSI	Coil	-	3.10	708289482080
T62025004	7/8	1 1/8	25	80 PSI	Spool	11.5 x 10	10.60	708289496889
T62075003	3/4	1	75	80 PSI	Spool	11.5 x 10	18.00	708289481939

LATEX TUBING

T64 SERIES



Latex tubing is amber in color. Synthetic compound is very elastic. Use in low pressure applications where extreme flexibility is required. Excellent cold temperature resistance. Do not use with petroleum based products.

- Synthetic latex compound
- Amber color
- Elasticity allows for use in a variety of applications
- Not for pressure applications
- Flexible in low temperatures
- Temperature range -40°F to +180°F

Part Number	I.D. (in)	O.D. (in)	Length (ft.)	Pressure @ 70°F	Package Info & Dimensions			
					Type	L x W x H (in)	Weight (pkg/lbs.)	UPC
T64005001	1/4	3/8	50	N/A	Spool	3.50 x 8.0	1.60	708289482189
T64006001	1/4	3/8	10	N/A	Coil	---	0.40	708289482288



VACUUM TUBING

T68 SERIES



Black non-reinforced vacuum tubing. Small diameter thermoplastic compound for a variety of uses. Designed for vacuum applications but can be used for low pressure water lines. Not for under-hood applications. For California Residents: ⚠ **WARNING:** Cancer and Reproductive Harm – www.P65Warnings.ca.gov

- Non-reinforced thermoplastic compound
- Black color
- Suitable for use as windshield wiper vacuum tubing
- Weather resistant
- Not for under hood application
- Temperature range +25°F to +150°F

Part Number	I.D. (in)	O.D. (in)	Length (ft.)	Pressure @ 70°F	Package Info & Dimensions			
					Type	L x W x H (in)	Weight (pkg/lbs.)	UPC
T68004002	1/8	5/16	50	60 PSI	Boxed	9.5 x 3 x 9.5	1.70	708289500128
T68004003	3/16	3/8	50	50 PSI	Boxed	9.5 x 3 x 9.5	1.80	708289500210
T68004004	1/4	7/16	50	40 PSI	Boxed	12.75 x 3 x 11	1.90	708289200302



BLACK NEOPRENE GASKET MATERIAL

R80 SERIES



Black moderately oil resistant solid gasket material used for a wide variety of applications including sealing, stripping and vibration elimination.

Medium hardness. Use over a wide temperature range. For California Residents:

▲ **WARNING:** Cancer and Reproductive Harm – www.P65Warnings.ca.gov

- Non-reinforced neoprene rubber blend compound
- General purpose grade
- Weather resistant material for a variety of applications
- Moderate oil resistance
- Temperature range -20°F to +180°F

Package Info & Dimensions

Part Number	Thickness (in)	Width (in)	Length (ft.)	Type	L x W x H (in)	UPC
R80005001	1/16	12	33	Spool	10.50 x 12 x 10.50	708289484787

RED RUBBER GASKET MATERIAL

R82 SERIES



Red general purpose plumber's sheet used for water sealing and other applications where oil resistance is not required. Solid material is medium/high hardness features slight stiffness yet flexible for most applications. For California Residents:

▲ **WARNING:** Cancer and Reproductive Harm – www.P65Warnings.ca.gov

- Non-reinforced synthetic rubber compound
- General purpose grade
- Weather and abrasion resistant
- Limited oil resistance
- Temperature range -20°F to +160°F

Package Info & Dimensions

Part Number	Thickness (in)	Width (in)	Length (ft.)	Type	L x W x H (in)	UPC
R82005001	1/16	12	33	Spool	10.5 x 12 x 10.5	708289485586
R82005002	1/8	12	18	Spool	10.5 x 12 x 10.5	708289485982

CLOTH-INSERTED GASKET MATERIAL

R86 SERIES



Black general purpose solid material with added cloth reinforcement embedded in the sheet for increased tear resistance. Limited oil resistant rubber is medium hardness. Use for a variety of applications over a wide temperature range. For California Residents:

▲ **WARNING:** Cancer and Reproductive Harm – www.P65Warnings.ca.gov

- Reinforced synthetic rubber compound
- Black color
- Weather resistant material for a variety of applications
- Limited oil resistance
- Tear resistant
- Temperature range -20°F to +170°F

Package Info & Dimensions

Part Number	Thickness (in)	Width (in)	Length (ft.)	Type	L x W x H (in)	UPC
R86005001	1/16	12	33	Spool	12 x 12 x 12	708289487184

SPOOL AND BOX DISPENSER RACKS

8 FT SPOOL RACK

EXCLUSIVE
PATENTED
DESIGN

Includes 45 different hose and tubing constructions displayed on an attractive racking system for easy dispensing. Color coded by hose type. Unique display arms for individual product information features an easy fixture for holding hose and tubing in place after cutting. Descriptive rack header showing complete product specifications. 84"H x 96" W without header. For California Residents: **▲ WARNING:** Cancer and Reproductive Harm – www.P65Warnings.ca.gov



Assortment includes:

- T10 Clear Vinyl Tubing
- T12 Braided Tuning
- T16 Polyethylene Tubing
- T18 Red PVC Air/Water Hose
- T22 PVC Fuel Hose
- T24 Micro Fuel Tubing
- T30 Spa Hose
- T32 Pool Vacuum Hose
- T34 Bilge Hose
- T36 Economy PVC Discharge Hose
- T44 PVC Appliance Drain Hose
- T62 Heater Hose
- T64 Latex Tubing
- Custom assortments available



SPOOL AND BOX DISPENSER RACKS

3 Ft DISPENSER RACK



Includes 27 different hose and tubing constructions in the most popular sizes on four shelves with descriptive information header. Color coded by hose type. Boxes designed with internal spool for easy dispensing of product, especially in longer lengths. Descriptive Rack Header showing complete product specifications. 84" H x 36" W without header. For California Residents: ⚠ **WARNING:** Cancer and Reproductive Harm – www.P65Warnings.ca.gov

- Assortment includes:
- T10 Clear Vinyl Tubing
 - T12 Braided Vinyl Tubing
 - T16 Polyethylene Tubing
 - T18 Red PVC Air/Water Hose
 - T22 PVC Fuel Hose
 - T44 PVC Appliance Drain Hose
 - Custom assortments available

4 Ft SPOOL RACK

Includes 30 different hose and tubing constructions on compact spools for easy dispensing. Descriptive rack header panel showing complete product specifications. Unique display arms for individual product information features an easy fixture for holding tubing in place after cutting. Color coded by hose type. Seven rows of product plus a descriptive information header. 84" H x 42" W without header.

For California Residents: ⚠ **WARNING:** Cancer and Reproductive Harm – www.P65Warnings.ca.gov


- Assortment includes:
- T10 Clear Vinyl Tubing
 - T12 Braided Vinyl Tubing
 - T16 Polyethylene Tubing
 - T18 Red PVC Air/Water Hose
 - T22 PVC Fuel Hose
 - T24 Micro Fuel Tubing
 - T44 PVC Appliance Drain Hose
 - T62 Heater Hose
 - T64 Latex Tubing
 - Custom assortments available

**EXCLUSIVE
PATENTED
DESIGN**



PREMIUM RUBBER WASHING MACHINE HOSE

WA61 SERIES

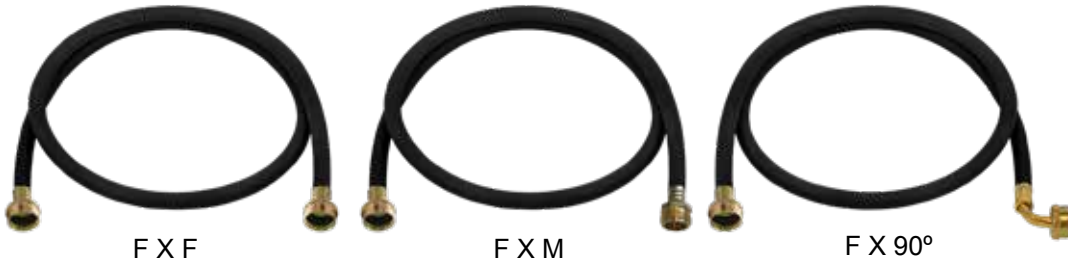

Highest quality black EPDM rubber washing machine inlet hose assemblies manufactured to original equipment specifications. Can use for hot or cold lines. Quality plated GHT fittings installed each end. Choose from female x female, female x male or female x 90° female assembly. For California Residents: **▲ WARNING: Cancer and Reproductive Harm –**

www.P65Warnings.ca.gov

- Reinforced premium rubber compound
- Use for hot or cold supply line
- High burst strength
- Meets OEM specifications
- Plated steel fittings
- Bagged hoses include washers
- Bulk: 25/Box



Part Number	Length (ft.)	Color	End Connections	Package Info & Dimensions			UPC
				Type	L x W x H (in)	Weight (pkg/lbs.)	
WA6102003	3	Black	F X F	Bulk	20 x 20 x 6	0.56	708289514439
WA6107003	3	Black	F X F	Bag	12 x 15	0.60	708289514521
WA6102004	4	Black	F X F	Bulk	20 x 20 x 6	0.68	708289514613
WA6107004	4	Black	F X F	Bag	12 x 15	0.72	708289267533
WA6102005	5	Black	F X F	Bulk	20 x 20 x 6	0.84	708289514705
WA6107005	5	Black	F X F	Bag	12 x 15	0.88	708289267571
WA6102006	6	Black	F X F	Bulk	20 x 20 x 6	0.96	708289514798
WA6107006	6	Black	F X F	Bag	12 x 15	1.00	708289267601
WA6102008	8	Black	F X F	Bulk	20 x 20 x 6	1.24	708289514880
WA6107008	8	Black	F X F	Bag	12 x 15	1.28	708289267618
WA6102010	10	Black	F X F	Bulk	20 x 20 x 6	1.48	708289514972
WA6107010	10	Black	F X F	Bag	12 x 15	1.52	708289505437
WA6102012	12	Black	F X F	Bulk	20 x 20 x 6	1.80	708289515061
WA6107012	12	Black	F X F	Bag	12 x 15	1.84	708289515153
WA6102303	3	Black	F X M	Bulk	20 x 20 x 6	0.52	708289516778
WA6107303	3	Black	F X M	Bag	12 x 15	0.56	708289516860
WA6102304	4	Black	F X M	Bulk	20 x 20 x 6	0.64	708289516952
WA6107304	4	Black	F X M	Bag	12 x 15	0.68	708289517041
WA6102305	5	Black	F X M	Bulk	20 x 20 x 6	0.76	708289517133
WA6107305	5	Black	F X M	Bag	12 x 15	0.80	708289517225
WA6102306	6	Black	F X M	Bulk	20 x 20 x 6	0.92	708289517317
WA6107306	6	Black	F X M	Bag	12 x 15	0.96	708289517409
WA6102308	8	Black	F X M	Bulk	20 x 20 x 6	1.16	708289517492
WA6107308	8	Black	F X M	Bag	12 x 15	1.20	708289517584
WA6102310	10	Black	F X M	Bulk	20 x 20 x 6	1.44	708289517676
WA6107310	10	Black	F X M	Bag	12 x 15	1.48	708289517768
WA6102312	12	Black	F X M	Bulk	20 x 20 x 6	1.76	708289517850
WA6107312	12	Black	F X M	Bag	12 x 15	1.80	708289517942
WA6102103	3	Black	F X 90	Bulk	20 x 20 x 6	0.72	708289515429
WA6107103	3	Black	F X 90	Bag	12 x 15	0.76	708289515511
WA6102104	4	Black	F X 90	Bulk	20 x 20 x 6	0.84	708289515603
WA6107104	4	Black	F X 90	Bag	12 x 15	0.88	708289515696
WA6102105	5	Black	F X 90	Bulk	20 x 20 x 6	0.96	708289515788
WA6107105	5	Black	F X 90	Bag	12 x 15	1.00	708289515870
WA6102106	6	Black	F X 90	Bulk	20 x 20 x 6	1.12	708289515962
WA6107106	6	Black	F X 90	Bag	12 x 15	1.16	708289295086
WA6102108	8	Black	F X 90	Bulk	20 x 20 x 6	1.36	708289516051
WA6107108	8	Black	F X 90	Bag	12 x 15	1.40	708289516143
WA6102110	10	Black	F X 90	Bulk	20 x 20 x 6	1.64	708289516235
WA6107110	10	Black	F X 90	Bag	12 x 15	1.68	708289516327
WA6102112	12	Black	F X 90	Bulk	20 x 20 x 6	1.88	708289516419
WA6107112	12	Black	F X 90	Bag	12 x 15	1.92	708289516501

TWIN PACK - PREMIUM RUBBER WASHING MACHINE HOSE WA6RB & WA61T SERIES



Highest quality black EPDM rubber washing machine inlet hose assemblies manufactured to original equipment specifications. Can use for hot or cold lines. Quality plated GHT female fittings installed each end. Available in bagged twin pack for retail sale.

Choose from red & blue or black & black. For California Residents: **WARNING:** Cancer and Reproductive Harm – www.P65Warnings.ca.gov

- Reinforced premium rubber compound
- Use for hot or cold supply line
- High burst strength
- Meets OEM specifications
- Plated steel fittings
- Bagged hoses include washers



Package Info & Dimensions

Part Number	Length (ft.)	Color	End Connections	Type	L x W x H (in)	Weight (pkg/lbs.)	UPC
WA6RB7004	4	Red / Blue	F x F	Bag	12 x 15	1.42	708289620901
WA6RB7005	5	Red / Blue	F x F	Bag	12 x 15	1.74	708289273688
WA6RB7006	6	Red / Blue	F x F	Bag	12 x 15	1.98	708289674805
WA6RB7008	8	Red / Blue	F x F	Bag	12 x 15	2.54	708289513715
WA6RB7010	10	Red / Blue	F x F	Bag	12 x 15	3.02	708289513807
WA61T7004	4	Black/Black	F x F	Bag	12 x 15	1.42	708289620802
WA61T7005	5	Black/Black	F x F	Bag	12 x 15	1.74	708289620406
WA61T7006	6	Black/Black	F x F	Bag	12 x 15	1.98	708289267496
WA61T7008	8	Black/Black	F x F	Bag	12 x 15	2.54	708289267519
WA61T7010	10	Black/Black	F x F	Bag	12 x 15	3.02	708289514347

STEEL BRAID REINFORCED INLET HOSE

WA07 & WA06 TWIN PACK SERIES



Inlet hose featuring a steel braid reinforcement for added protection from hose failure. Red or blue cover available for easy identification. Use as hot or cold supply line.

Plated GHT female fittings installed each end. For California Residents: **WARNING:** Cancer and Reproductive Harm – www.P65Warnings.ca.gov

- Steel braid burst-proof construction
- Use for hot or cold supply line
- Color coded for easy identification
- Kink resistant
- Plated brass fittings
- Bagged hoses include washers

Package Info & Dimensions

Part Number	Length (ft.)	Color	End Connections	Type	L x W x H (in)	Weight (pkg/lbs.)	UPC
WA0702004	4	Blue	F X F	Bulk	20 x 20 x 6	0.85	708289519748
WA0707004	4	Blue	F X F	Bag	12 x 15	0.89	708289505161
WA0702005	5	Blue	F X F	Bulk	20 x 20 x 6	1.00	708289519830
WA0707005	5	Blue	F X F	Bag	12 x 15	1.04	708289512091
WA0702006	6	Blue	F X F	Bulk	20 x 20 x 6	1.20	708289519922
WA0707006	6	Blue	F X F	Bag	12 x 15	1.24	708289512183
WA0677004	4	Red/Blue	F X F	Bag	12 x 15	1.75	708289520829
WA0677006	6	Red/Blue	F X F	Bag	12 x 15	2.45	708289521543

"Y" MIXER HOSE

WA61 SERIES



- Reinforced premium rubber compound
- Use for hot or cold supply line
- Meets OEM specifications
- Plated steel fittings
- Bagged hoses include washers

Black 'Y' mixer hose assembly for washers that have a single supply line. 12" hose length allows for convenient installation. GHT female fittings installed with a GHT male between the two hoses. For California Residents:

▲ **WARNING:** Cancer and Reproductive Harm – www.P65Warnings.ca.gov



Part Number	Length (ft.)	End Connections	Package Info & Dimensions			
			Type	L x W x H (in)	Weight (pkg/lbs.)	UPC
WA6102901	1	M X F X F	Bulk	20 x 20 x 6	0.48	708289518215
WA6107901	1	M X F X F	Bag	7 x 15	0.52	708289295284

HOOK DRAIN HOSE

WD12 & WD16 SERIES



- Thermoplastic construction
- Attaches to 3/4", 7/8" and 1" outlets
- Withstands chemicals and detergents
- WD12 attaches to 3/4", 7/8" and 1" outlets
- WD16 attaches to 1", 1-1/8", and 1-1/4" outlets
- Formed hook end
- Bagged hoses include clamp

Formed hook hose used as a washing machine drain hose. Two sizes to choose from for washers using 3/4" to 1-1/4" drain outlets. For California Residents: ▲ **WARNING:** Cancer and Reproductive Harm – www.P65Warnings.ca.gov

Part Number	Length (ft.)	Outlet Connections	Package Info & Dimensions			
			Type	L x W x H (in)	Weight (pkg/lbs.)	UPC
WD1202005	5	3/4", 7/8", 1"	Bulk	20 x 20 x 6	0.80	708289518307
WD1207005	5	3/4", 7/8", 1"	Bag	12 x 15	0.92	708289518390
WD1202006	6	3/4", 7/8", 1"	Bulk	20 x 20 x 6	1.00	708289518482
WD1207006	6	3/4", 7/8", 1"	Bag	12 x 15	1.30	708289518574
WD1602906	6	1", 1 1/8", 1 1/4"	Bulk	20 x 20 x 6	1.40	708289518758
WD1607906	6	1", 1 1/8", 1 1/4"	Bag	18 X 22	1.90	708289267540

CORRUGATED HOOK DRAIN HOSE

WD56 SERIES



- Corrugated plastic construction
- Kink resistant and crushproof
- Attaches to 1", 1-1/8" and 1-1/4" outlets
- Withstands chemicals and detergents
- Bagged hoses include clamp

Plastic hook drain hose featuring a corrugated plastic construction for flexibility and kink resistance. Gray in color. For California Residents: ▲ **WARNING:** Cancer and Reproductive Harm – www.P65Warnings.ca.gov

Part Number	Length (ft.)	Outlet Connections	Package Info & Dimensions			
			Type	L x W x H (in)	Weight (pkg/lbs.)	UPC
WD5602005	5	1", 1 1/8", 1 1/4"	Bulk	20 x 20 x 6	0.60	708289520287
WD5607005	5	1", 1 1/8", 1 1/4"	Bag	12 x 15	0.90	708289520379
WD5602006	6	1", 1 1/8", 1 1/4"	Bulk	20 x 20 x 6	0.80	708289520461
WD5607006	6	1", 1 1/8", 1 1/4"	Bag	18 X 22	1.10	708289520553



RUBBER DISHWASHER DRAIN HOSE

WDX50 & WDX70 SERIES



Black rubber hot water drain hose for dishwashers or washing machines. Reinforced for dimensional stability. For California Residents: **▲ WARNING:** Cancer and Reproductive Harm – www.P65Warnings.ca.gov

- Reinforced premium rubber compound
- Use with dishwasher and washing machines
- Rated for hot water to 190°F



Part Number	Size (in.)	Length (ft.)	Package Info & Dimensions			
			Type	L x W x H (in)	Weight (pkg/lbs.)	UPC
WDX500550	5/8	50	Bulk	14 x 14 x 4	11.00	708289518932
WDX700550	7/8	50	Bulk	21 x 21 x 4	14.00	708289295185

PLASTIC DISHWASHER DRAIN HOSE

WD78 SERIES



Lightweight, corrugated and very flexible dishwasher drain hose in 78" Length. Smooth end connections on both ends for easy installation. For California Residents: **▲ WARNING:** Cancer and Reproductive Harm – www.P65Warnings.ca.gov

- Corrugated plastic construction
- Kink resistant and crushproof
- Meets OEM specifications
- Bagged hoses include clamp

Part Number	Length (in.)	Outlet Connections	Package Info & Dimensions			
			Type	L x W x H (in)	Weight (pkg/lbs.)	UPC
WD7802506	78"	5/8", 3/4", 1"	Bulk	20 x 20 x 6	0.50	708289518840
WD7807506	78"	5/8", 3/4", 1"	Bag	12 x 15	0.80	708289505703

ALUMINUM GOOSENECK

WC16 SERIES



Aluminum gooseneck for use with 1" hose. Use as a hook for the end of a drain hose to keep hose in place. For California Residents: **▲ WARNING:** Cancer and Reproductive Harm – www.P65Warnings.ca.gov

- Solid aluminum construction
- Attaches to 1" drain hose

Part Number	End Connection	Package Info & Dimensions			
		Type	L x W x H (in)	Weight (pkg/lbs.)	UPC
WC1602000	1"	Bulk	10 x 7 x 10	0.16	708289519205

UTILITY FILL HOSE

WA61 SERIES



Reinforced rubber hose used as a water fill hose. GHT female fitting installed one end only. For California Residents: **▲ WARNING:** Cancer and Reproductive Harm – www.P65Warnings.ca.gov

- Reinforced premium rubber compound
- Plated steel fitting
- Bagged hoses include washer



Part Number	Length (ft.)	End Connection	Package Info & Dimensions			
			Type	L x W x H (in)	Weight (pkg/lbs.)	UPC
WA6102405	5	Female	Bulk	20 x 20 x 6	0.68	708289519298
WA6107405	5	Female	Bag	12 x 15	0.72	708289505345

T-REXAIR® AIR HOSE

HA74 SERIES



New lightweight and flexible construction featuring a special engineered copolymer material allowing superior flexibility but also durability. Abrasion and kink resistance. UV, oil and weather resistant. High visibility blue color. Rated to 300 PSI at 70°F with a temperature range -40°F to 140°F. Includes Brass NPT males attached with bend restrictors both ends. Retail Packaged. For California Residents: **▲ WARNING:** Cancer and Reproductive Harm – www.P65Warnings.ca.gov

Part Number	I.D. (in)	Length (Ft)	Master Pack	UPC
HA7402501	1/4	25	24	708289526319
HA7405001	1/4	50	12	708289526401
HA7401001	1/4	100	8	708289526494
HA7402502	3/8	25	16	708289526586
HA7405002	3/8	50	8	708289526678
HA7410001	3/8	100	4	708289526760

T-REXFLEX® AIR HOSE

HA76 SERIES



Specially compounded PVC air hose. Economical, lightweight, flexible and abrasion resistant. High visibility yellow color. Rated to 300 PSI at 70 F with a temperature range of -10 F to 140 F. Brass NPT males attached with bend restrictors both ends. Retail Packaged. For California Residents: **▲ WARNING:** Cancer and Reproductive Harm – www.P65Warnings.ca.gov

Part Number	I.D. (in)	Length (Ft)	Master Pack	UPC
HA7602501	1/4	25	24	708289528023
HA7605001	1/4	50	12	708289528115
HA7601001	1/4	100	8	708289528207
HA7602502	3/8	25	16	708289528290
HA7605002	3/8	50	8	708289528382
HA7601002	3/8	100	4	708289528474

UDP T-REXWATER HOSE

HA84 SERIES



Engineered copolymer material designed for water and garden applications. Lightweight and flexible, coils easily. NSF372 certified for lead-free and FDA CFR Title 21 compliant inner core. Drinking water safe. Lead-free and phthalate-free. Meets RoHs. Polyester reinforced for working pressures to 150 PSI at 68°F. Includes garden hose threaded ends - Spring guard for added kink resistance on female end and comfort grip on male end. High visibility green color. Temperature range -40°F to 140°F. Retail Packaged. For California Residents: **▲ WARNING:** Cancer and Reproductive Harm – www.P65Warnings.ca.gov

Part Number	I.D. (in)	Length (Ft)	Master Pack	UPC
HA8402502	5/8	25	5	708289526852
HA8405002	5/8	50	4	708289526944
HA8410001	5/8	100	2	708289527033

UDFP [®] **ULTRA DYNAMIC HOSE PRODUCTS**

A DIVISION OF _____
ABBOTT RUBBER
COMPANY, INC.

1700 NICHOLAS BLVD • ELK GROVE VILLAGE, IL 60007
PHONE: 800.852.1855
www.udproducts.com